## SIEMENS

## Data sheet


## 3SU1000-1GB20-0AA0



EMERGENCY STOP mushroom pushbutton, 22 mm, round, plastic, red, 30 mm, positive latching, acc. to EN ISO 13850, rotate-to-unlatch

product brand name	SIRIUS ACT		
product designation	EMERGENCY STOP mushroom pushbuttons		
design of the product	Actuating/signaling element		
product type designation	3SU1		
product line	Plastic, black, 22 mm		
Enclosure			
number of command points	1		
Actuator			
design of the actuating element	positive latching		
principle of operation of the actuating element	latching		
product extension optional			
light source	No		
contact module	Yes		
color			
<ul> <li>of the actuating element</li> </ul>	red		
material of the actuating element	plastic		
shape of the actuating element	round		
outer diameter of the actuating element	33.8 mm		
type of unlocking device	rotate-to-unlatch mechanism		
number of switching positions	2		
Front ring			
product component front ring	No		
General technical data			
product function			
positive opening	Yes		
<ul> <li>EMERGENCY OFF function</li> </ul>	Yes		
EMERGENCY STOP function	Yes		
protection class IP	IP66, IP67, IP69(IP69K)		
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13		
shock resistance			
<ul> <li>according to IEC 60068-2-27</li> </ul>	sinusoidal half-wave 15g / 11 ms		
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B		
vibration resistance			
<ul> <li>according to IEC 60068-2-6</li> </ul>	10 500 Hz: 5g		
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B		
operating frequency maximum	600 1/h		
mechanical service life (operating cycles) typical	300 000		
reference code according to IEC 81346-2	S		
Substance Prohibitance (Date)	10/01/2014		

310 value with high den	nand rate according to SN	N 31920 100	000			
proportion of dangero	us failures					
<ul> <li>with low demand rate according to SN 31920</li> </ul>		20 20	%			
<ul> <li>with high demand rate according to SN 31920</li> </ul>		920 20	20 %			
failure rate [FIT] with low demand rate according to SN 31920		to SN 31920 100	100 FIT			
nbient conditions						
ambient temperature						
during operation		-25	-25 +70 °C			
during storage		-40	-40 +80 °C			
environmental category during operation according to IEC 60721		ng to IEC 3M	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)			
stallation/ mounting/ c	limoneione	_			_	
-		rou	nd			
shape of the installation opening			round			
nounting diameter positive tolerance of in	nstallation diamotor		22.3 mm			
nounting height	istallation diameter		0.4 mm 44.2 mm			
nstallation width			8 mm			
nstallation depth			3 mm			
ertificates/ approvals		20.				
					Declaration of Co	
General Product Appr	oval				formity	
<b>E</b>		Ŵ		LHL	EG-Konf.	
Declaration of Con- formity	Test Certificates		Marine / Shipping			
UK CA	<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Certific-</u> ates/Test Report	ABS	Lloyds Register urs	PRS	
Marine / Shipping	other	Environment				
RINA	<u>Confirmation</u>	Environmental Con- firmations				
irther information	to exit the Russian mark	kat (saa bara)				
https://press.siemens.co Siemens is working or Please contact your loca EAC relevant market (of Information on the pac Inters://support.industry.si Information- and Down Inttps://www.siemens.co Industry Mall (Online on Inttps://mall.industry.sier	om/global/en/pressrelease n the renewal of the curr al Siemens office on the s ther than the sanctioned E ckaging siemens.com/cs/ww/en/vi nloadcenter (Catalogs, E m/ic10	e/siemens-wind-down-ru rent EAC certificates. status of validity of the E EAEU member states R ew/109813875 Brochures,)	AC certification if you inten ussia or Belarus).	d to import or offer to sup	ply these products to a	
Cax online generator	n siemens com///////CAX	order/default aspy2land	en&mlfb=3SU1000-1GB2	0-0440		
http://support.automatio						

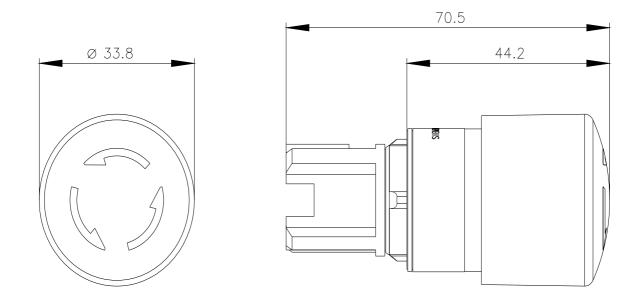

last modified:

1/27/2022 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3SU10001GB200AA0