## SIEMENS

## Data sheet


## 3SU1000-1HT20-0AA0



EMERGENCY STOP mushroom pushbutton, 22 mm, round, plastic, red, 40 mm, with lock Siemens, lock no. SMS1, positive latching, according to DIN EN ISO 13850, key-operated release

| product brand name   | SIRIUS ACT                          |  |  |
|--|-------------------------------------|--|--|
| product designation  | EMERGENCY STOP mushroom pushbuttons |  |  |
| design of the product  | Actuating/signaling element         |  |  |
| product type designation   | 3SU1                                |  |  |
| product line   | Plastic, black, 22 mm               |  |  |
| Enclosure  |                                     |  |  |
| number of command points   | 1                                   |  |  |
| Actuator   |                                     |  |  |
| design of the actuating element                                    | positive latching                   |  |  |
| principle of operation of the actuating element                    | latching                            |  |  |
| product extension optional   |                                     |  |  |
| light source   | No                                  |  |  |
| contact module   | Yes                                 |  |  |
| color  |                                     |  |  |
| <ul> <li>of the actuating element</li> </ul>                       | red                                 |  |  |
| material of the actuating element                                  | plastic                             |  |  |
| shape of the actuating element                                     | round                               |  |  |
| outer diameter of the actuating element                            | 40 mm                               |  |  |
| type of unlocking device   | Unlocking                           |  |  |
| number of switching positions                                      | 2                                   |  |  |
| switch position for key distraction                                | 0                                   |  |  |
| lock make  | CES                                 |  |  |
| key number   | SMS1                                |  |  |
| Front ring   |                                     |  |  |
| product component front ring                                       | No                                  |  |  |
| General technical data   |                                     |  |  |
| product function   |                                     |  |  |
| <ul> <li>positive opening</li> </ul>                               | Yes                                 |  |  |
| <ul> <li>EMERGENCY OFF function</li> </ul>                         | Yes                                 |  |  |
| <ul> <li>EMERGENCY STOP function</li> </ul>                        | Yes                                 |  |  |
| protection class IP  | IP66, IP67, IP69(IP69K)             |  |  |
| degree of protection NEMA rating                                   | 1, 2, 3, 3R, 4, 4X, 12, 13          |  |  |
| shock resistance   |                                     |  |  |
| <ul> <li>according to IEC 60068-2-27</li> </ul>                    | sinusoidal half-wave 15g / 11 ms    |  |  |
| <ul> <li>for railway applications according to EN 61373</li> </ul> | Category 1, Class B                 |  |  |
| vibration resistance   |                                     |  |  |
| <ul> <li>according to IEC 60068-2-6</li> </ul>                     | 10 500 Hz: 5g                       |  |  |
| <ul> <li>for railway applications according to EN 61373</li> </ul> | Category 1, Class B                 |  |  |
| operating frequency maximum  | 600 1/h                             |  |  |
| mechanical service life (operating cycles) typical                 | 300 000                             |  |  |

| reference code accord   | ding to IEC 81346-2   |  | S             |                             |                          |                                |  |
|---|---|--|---------------|-----------------------------|--------------------------|--------------------------------|--|
| Substance Prohibitance (Date)   |   |  | 10/01/2014    |                             |                          |                                |  |
| Safety related data   |   |  |               |                             |                          |                                |  |
| B10 value with high der   | mand rate according to SI   | N 31920  | 100 000       |                             |                          |                                |  |
| proportion of dangero   |   |  |               |                             |                          |                                |  |
|   | with low demand rate according to SN 31920                                  |  | 20 %          |                             |                          |                                |  |
| <ul> <li>with high demand rate according to SN 31920</li> </ul>   |   | 20 %   |               |                             |                          |                                |  |
| failure rate [FIT] with low demand rate according to SN 31920   |   | 100 FIT  |               |                             |                          |                                |  |
| Ambient conditions  | , , , , , , , , , , , , , , , , , , ,                                       |  |               |                             |                          |                                |  |
| ambient temperature   |   |  |               |                             |                          |                                |  |
| during operation  |   | -25 +70 °C   |               |                             |                          |                                |  |
| during storage  |   | -40 +80 °C   |               |                             |                          |                                |  |
| environmental category during operation according to IEC  |   | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%) |               |                             |                          |                                |  |
| 60721   | 0   | 5  | , ,           | , , , , , ,                 | ,                        | ,                              |  |
| Installation/ mounting/ of  | dimensions  |  |               |                             |                          |                                |  |
| shape of the installation   | on opening  |  | round         |                             |                          |                                |  |
| mounting diameter   |   |  | 22.3 mm       |                             |                          |                                |  |
| positive tolerance of i   | nstallation diameter  |  | 0.4 mm        |                             |                          |                                |  |
| mounting height   |   |  | 84.5 mm       |                             |                          |                                |  |
| installation width  |   |  | 40 mm         |                             |                          |                                |  |
| installation depth  |   |  | 26.3 mm       | 26.3 mm                     |                          |                                |  |
| Certificates/ approvals   |   |  |               |                             |                          |                                |  |
| General Product App   | roval   |  |               |                             |                          | Declaration of Con-<br>formity |  |
|   | <u>Confirmation</u>   | (ال<br>س   |               | UDE VDE                     | EHC                      | UK<br>CA                       |  |
| Declaration of Con-<br>formity  | Test Certificates   |  | Ма            | rine / Shipping             |                          |                                |  |
| CE<br>EG-Konf.  | Type Test Certific-<br>ates/Test Report                                     | <u>Special Test Ce</u><br><u>ate</u>                           | ertific-      | ABS                         | Lloyds<br>Register<br>us | PRS                            |  |
| Marine / Shipping   | other   | Environment  |               |                             |                          |                                |  |
| RINA  | <u>Confirmation</u>   | Environmental<br>firmations                                    |               |                             |                          |                                |  |
| Further information   |   |  |               |                             |                          |                                |  |
| Siemens has decided to exit the Russian market (see here).  |   |  |               |                             |                          |                                |  |
| https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business<br>Siemens is working on the renewal of the current EAC certificates.   |   |  |               |                             |                          |                                |  |
| Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an |   |  |               |                             |                          |                                |  |
|   | ther than the sanctioned  | EAEU member sta  | tes Russia or | Belarus).                   |                          |                                |  |
| Information on the packaging<br>https://support.industry.siemens.com/cs/ww/en/view/109813875  |   |  |               |                             |                          |                                |  |
| Information- and Downloadcenter (Catalogs, Brochures,)  |   |  |               |                             |                          |                                |  |
| https://www.siemens.com/ic10<br>Industry Mall (Online ordering system)  |   |  |               |                             |                          |                                |  |
| https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1000-1HT20-0AA0  |   |  |               |                             |                          |                                |  |
| Service&Support (Mar  | n.siemens.com/WW/CAX<br>nuals, Certificates, Char<br>siemens.com/cs/ww/en/p | acteristics, FAQs  | ,)            | lfb=3SU1000-1H <sup>-</sup> | <u>T20-0AA0</u>          |                                |  |
| Image database (prod  |   | on drawings, 3D ı  | models, devi  |                             | ams, EPLAN macros,)      |                                |  |
|   |   |  |               |                             |                          |                                |  |

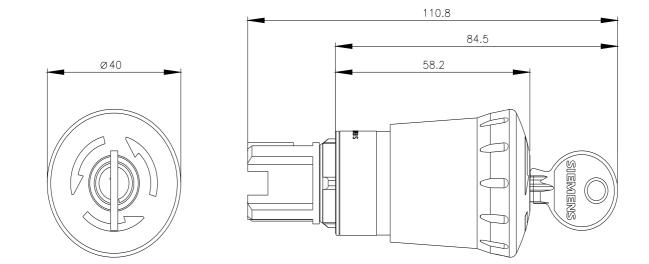

last modified:

1/27/2022 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3SU10001HT200AA0