

EOL - Modlink MSDD-set: Frame 4000-68112-0000000,

discontinued - End of Life Date: 2024-12-31


Art.No.: 4000-68112-0910000

Weight: 0.348 Country of origin: CZ

Model designation: X MSDD_1SW_2XUSB+RJ12,45_


Link to Product

Illustration

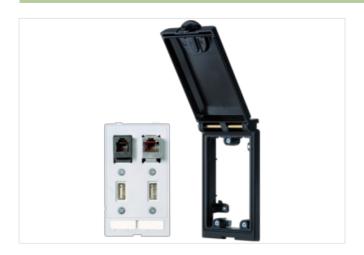





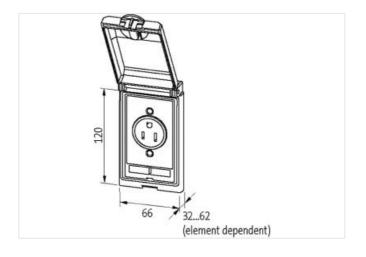

Product may differ from Image



Commercial data	
ECLASS-6.0	27189217
ECLASS-6.1	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27182806
ECLASS-10.1	27182806

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-08-22



ECLASS-11.1	27182806
ECLASS-12.0	27182806
ETIM-5.0	EC002625
ETIM-6.0	EC002625
ETIM-7.0	EC002625
ETIM-8.0	EC002625
customs tariff number	85366990
customs tariff number	85366990
customs tariff number	85366990
EAN	4048879285223
EAN	4048879285223
EAN	4048879285223
Packaging unit	1
Packaging unit	1
Packaging unit	1
Frame	
Degree of protection (EN IEC 60529)	IP65
Operating temperature min.	-10 °C
Operating temperature max.	60 °C
Storage temperature min.	-25 °C
Storage temperature max.	60 °C
Suitable for installation wall thickness min.	1 mm
Suitable for installation wall thickness max.	5 mm
Material housing	Fine zinc die casting
Coating housing	KTL
Shielding plate	
Connection information	Threaded hole M4
Tightening torque	0,9 Nm
USB	
Onerating voltage AC	40 \/
Operating voltage AC	48 V
Operating voltage DC	48 V
Operating voltage DC Operating voltage AC max. (UL-listed)	48 V 30 V
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed)	48 V 30 V 42,4 V
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current	48 V 30 V 42,4 V 1,5 A
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification	48 V 30 V 42,4 V 1,5 A
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max.	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques	48 V 30 V 42,4 V 1,5 A
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max.	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max. Operating voltage DC max.	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max. Operating voltage DC max. Operating voltage AC max. (UL-listed)	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector 48 V 48 V 30 V
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max. Operating voltage DC max. Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed)	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector 48 V 48 V 48 V 30 V
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max. Operating voltage DC max. Operating voltage DC max. Operating voltage DC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current max.	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector 48 V 48 V 30 V 42,4 V
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max. Operating voltage DC max. Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current max. Current operating max. (UL)	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector 48 V 48 V 30 V 42,4 V 1 A
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max. Operating voltage DC max. Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current max. Current operating max. (UL) Family construction form	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector 48 V 48 V 30 V 42,4 V 1 A 175 mA RJ12
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max. Operating voltage DC max. Operating voltage DC max. Operating voltage DC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current max. Current operating max. (UL) Family construction form Family type Back side	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector 48 V 48 V 30 V 42,4 V 1 A 175 mA RJ12 RJ12
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max. Operating voltage DC max. Operating voltage DC max. Operating voltage DC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current max. Current operating max. (UL) Family construction form Family type Back side Looking techniques	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector 48 V 48 V 30 V 42,4 V 1 A 175 mA RJ12
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max. Operating voltage DC max. Operating voltage DC max. Operating voltage DC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current max. Current operating max. (UL) Family construction form Family type Back side	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector 48 V 48 V 30 V 42,4 V 1 A 175 mA RJ12 RJ12
Operating voltage DC Operating voltage AC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current USB specification Data transmission rate max. Looking techniques RJ12 Operating voltage AC max. Operating voltage DC max. Operating voltage DC max. Operating voltage DC max. (UL-listed) Operating voltage DC max. (UL-listed) Operating current max. Current operating max. (UL) Family construction form Family type Back side Looking techniques	48 V 30 V 42,4 V 1,5 A 3.0 5000 MBit/s Snap-in connector 48 V 48 V 30 V 42,4 V 1 A 175 mA RJ12 RJ12

Current operating max. (UL)

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-08-22

175 mA



Family construction form	RJ45	
Family type Back side	RJ45	
Cable category min.	Cat5e	
Looking techniques	Snap-in connector	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murrelektronik:

4000-68112-0910000