



TSic 716



Temperature Sensor IC



For a fully calibrated and extremely accurate low power temperature measurement



Benefits & characteristics

- Easy to integrate (digital output signal)
- Outstanding accuracy of ± 0.07 K
- Very low power consumption
- Excellent long-term stability
- Accuracy range of 20 K can be shifted (default: +25 °C to +45 °C)
- Fully calibrated (custom calibration and assembly available)
- Capable of communicating over a distance of > 10 m


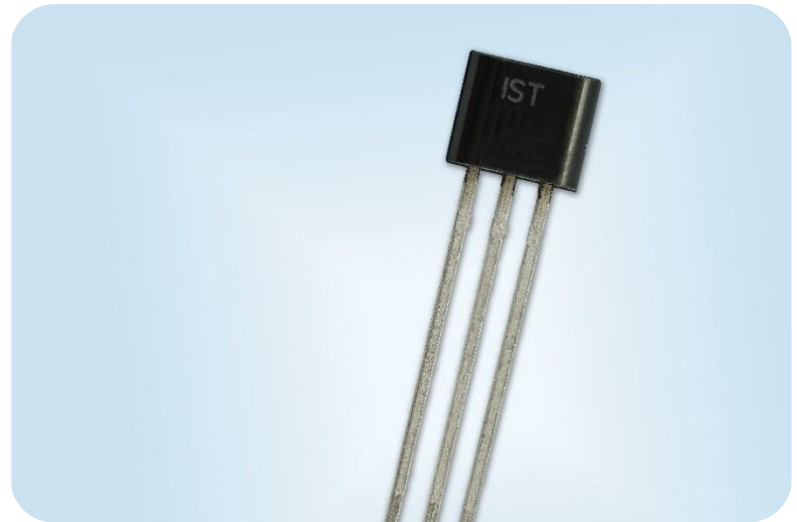


Illustration ¹⁾



¹⁾ for actual size see dimensions in order information

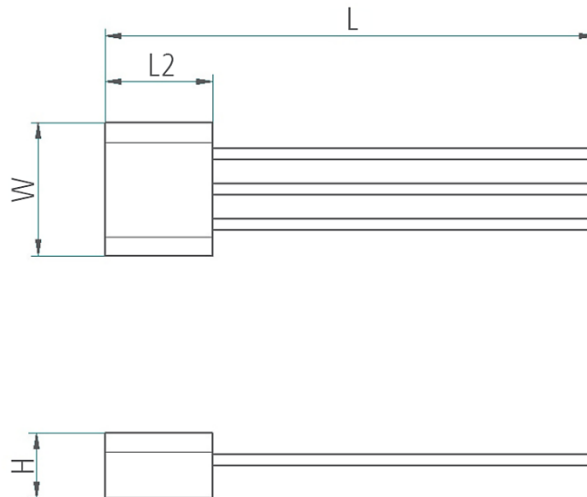


Technical Data

Dimensions (L / L2 x W x H in mm): ²⁾	17.30 / 3.81 x 4.57 x 2.3
Operating temperature range:*	-10 °C to +60 °C (-7 °C to +57 °C guaranteed)
Accuracy:*	±0.07 K in the range of +25 °C to +45 °C (other ranges upon request)
Resolution:*	4 mK
Sampling rate:*	1 Hz
Supply voltage:*	4.5 V to 5.5 V
Supply current:	typ. 45 µA at 25 °C and 5 V for minimal self-heating
Packaging:*	TO92
Digital signal output:	14 bit ZACWire, see application note ATTSic_E

* Customer-specific alternatives available

²⁾ For tolerances, see Application Note

Pin Assignment

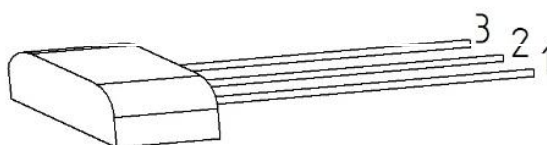

	Pin 1	Pin 2	Pin 3
TO92	GND	Signal	V _{dd} , Supply voltage (3 V to 5.5 V)



Absolute maximal ratings

	Min	Max
Supply voltage (V_{dd})	-0.3 V	6 V
Voltages to analog I/O – Pins (V_{SIG} , V_{GND})	-0.3 V	$V_{dd}+0.3$ V
Storage temperature range (T_{STOR})	-10 °C	+60 °C
Non-operating temperature range		

Operating conditions

	Min	Typ	Max
Supply voltage to GND (V^+)	2.97 V	5 V	5.5 V
Supply current (I_{Vdd}) at $V_{dd} = 3.3$ V, RT	30 μ A	45 μ A	80 μ A
Operating temperature range (T_{amb})	-10 °C		+60 °C
Output load capacitance (C_L)			15 nF
External capacitance between V_{dd} and GND ³⁾	100 nF (recommended)		
Output load resistance between signal and GND (or V_{dd})	47 k Ω		

³⁾ Recommended as close to TSic V_{dd} and GND-Pins as possible

Temperature accuracies⁴⁾

T1: +25 °C to +45 °C	± 0.07 K
T2: -10 °C to +60 °C	± 0.2 K

⁴⁾ The sensor is calibrated at 5 V. The provided accuracy is applicable for a supply voltage between 4.5 V and 5.5 V. The accuracy is smaller with a supply voltage between 2.97 V and 4.5 V. For applications where the best accuracy at 3 V is requested, ask for a custom specific, 3 V calibrated device. Other TSic products with custom specific calibrations are available upon request e.g. other temperature range for high accuracy. Accuracy at delivery; the assembly method can influence the accuracy!



Order Information

Output signal	Accuracy	Order code	Reference	Output type	Packaging
716	$\pm 0.07\text{ }^{\circ}\text{C}$	103493	TSic 716 TO92	Digital, ZACWire	TO92



Additional Electronics

LabKit

Document name: DTTsSicLabKit_E



Additional Documents

Application Note

Document name: ATTSic_E





Order Information

Temperature Sensor IC - Secondary reference



TSic



Accuracy

2	=	±0.5 °C at +80 °C range
3	=	±0.3 °C at +80 °C range
4	=	not defined
5	=	±0.1 °C at +40 °C range (limited measuring range from -10 °C to +60 °C)
6	=	not defined
7	=	±0.07 °C at +20 °C range (limited measuring range from -10 °C to +60 °C)



Bit size

0	=	11 bit
1	=	14 bit

Output signal

1	=	analog 0 V to 1 V
3	=	ratiometric 10 % to 90 % V _{dd}
6	=	digital ZACWire

Housing

SOP-8
TO92

Special

E.g. „250 Hz“ for a high sampling rate or „-30/70“ for temperature and tolerance range

TSic 7 1 6 TO92 -30/70



Innovative Sensor Technology IST AG • Stegrütistrasse 14 • 9642 Ebnat-Kappel • Switzerland
+41 71 992 01 00 • info@ist-ag.com • www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes or product specifications without previous announcement reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Innovative Sensor Technology:](#)

[TSic 716 TO92](#)