




Over 30 Years of Quality Through Innovation

LSJ74, SST74

ULTRA LOW NOISE
SINGLE P-CHANNEL JFET


FEATURES	
ULTRA LOW NOISE ($f = 1\text{kHz}$)	$e_n = 0.9\text{nV}/\sqrt{\text{Hz}}$
HIGH GAIN	$G_{fs} = 22\text{mS (typ)}$
HIGH INPUT IMPEDANCE	$I_G = 1.0\text{nA}$
LOW CAPACITANCE	$C_{RSS} = 32\text{pF}$
IMPROVED SECOND SOURCE REPLACEMENT FOR 2SJ74	
ABSOLUTE MAXIMUM RATINGS ¹ @ 25 °C (unless otherwise stated)	
Maximum Temperatures	
Storage Temperature	-55 to +150°C
Junction Operating Temperature	-55 to +135°C
Maximum Power Dissipation	
Continuous Power Dissipation	400mW
Maximum Currents	
Gate Forward Current	$I_{G(F)} = -10\text{mA}$
Maximum Voltages	
Gate to Drain Voltage	$V_{GDS} = 25\text{V}$
Gate to Source Voltage	$V_{GSS} = 25\text{V}$

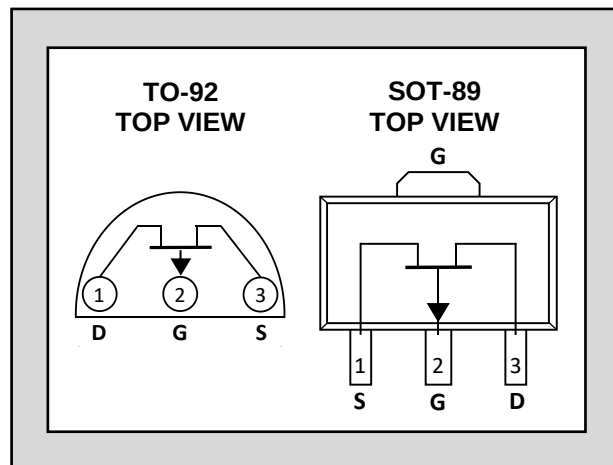

ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise stated)


SYMBOL	CHARACTERISTIC	MIN	TYP	MAX	UNITS	CONDITIONS
BV_{GDS}	Gate to Drain Breakdown Voltage	25			V	$V_{DS} = 0\text{V}, I_G = 100\mu\text{A}$
$V_{GS(OFF)}$	Gate to Source Pinch-off Voltage	0.15		2		$V_{DS} = -10\text{V}, I_D = -0.1\mu\text{A}$
I_{DSS}	Drain to Source Saturation Current ²	LSJ74A	-2.6	-6.5	mA	$V_{DG} = -10\text{V}, V_{GS} = 0\text{V}$
		LSJ74B	-6	-12		
		LSJ74C	-10	-20		
		LSJ74D	-17	-30		
I_G	Gate Operating Current		50		pA	$V_{DG} = -10\text{V}, I_D = -1\text{mA}$
I_{GSS}	Gate to Source Leakage Current			1	nA	$V_{GS} = 25\text{V}, V_{DS} = 0\text{V}$
G_{fss}	Full Conductance Transconductance	8	22		mS	$V_{DG} = -10\text{V}, V_{GS} = 0\text{V}, f = 1\text{kHz}$
e_n	Noise Voltage		1.9		$\text{nV}/\sqrt{\text{Hz}}$	$V_{DS} = -10\text{V}, I_D = -2\text{mA}, f = 1\text{kHz}, \text{NBW} = 1\text{Hz}$
			4			$V_{DS} = -10\text{V}, I_D = -2\text{mA}, f = 10\text{Hz}, \text{NBW} = 1\text{Hz}$
C_{ISS}	Common Source Input Capacitance		105		pF	$V_{DS} = -10\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$
C_{RSS}	Common Source Reverse Transfer Cap.		32			$V_{DS} = -10\text{V}, I_D = 0\text{A}, f = 1\text{MHz}$

LSJ74 TO-92

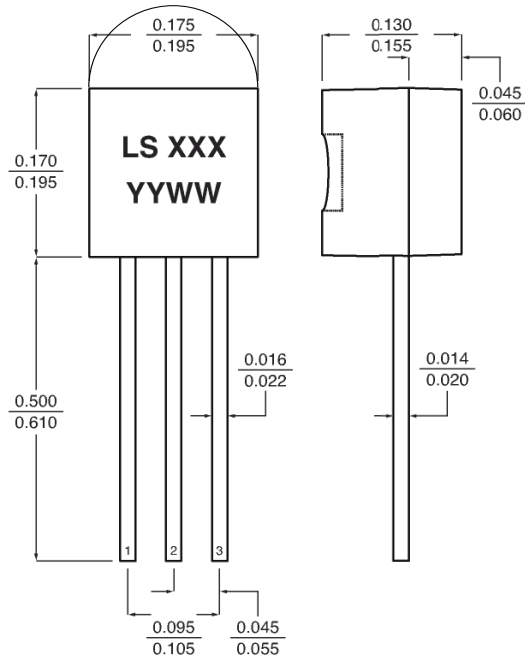

Dimensions in inches

SST74 SOT-89

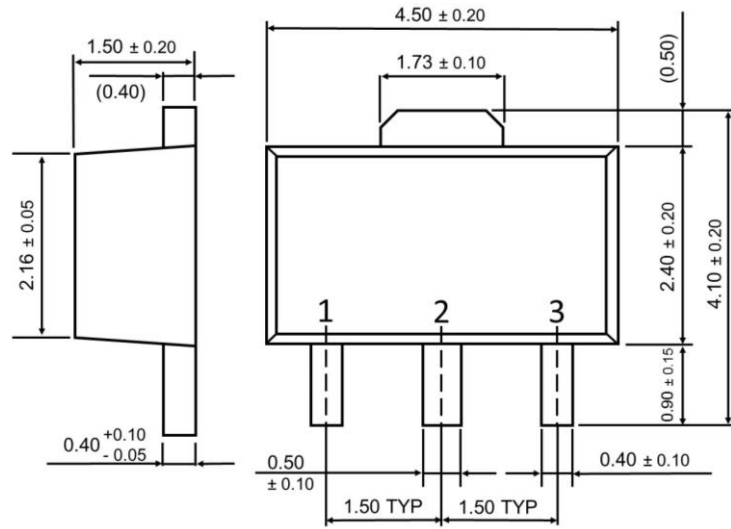

Dimensions in millimeters







NOTES:

1. Absolute maximum ratings are limiting values above which serviceability may be impaired.
2. Pulse test: PW ≤ 300 μS, Duty Cycle ≤ 3%.
3. All MIN/TYP/MAX Limits are absolute values. Negative signs indicate negative electrical polarity only.






Information furnished by Linear Integrated Systems is believed to be accurate and reliable. However, no responsibility is assumed for its use; nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Linear Integrated Systems.

Linear Integrated Systems develops and produces the highest performance semiconductors of their kind in the industry. Linear Systems, founded in 1987, uses patented and proprietary processes and designs to create its high performance discrete semiconductors. Expertise brought to the company is based on processes and products developed at Amelco, Union Carbide, Intersil and Micro Power Systems by company founder John H. Hall.

TYPICAL CHARACTERISTICS

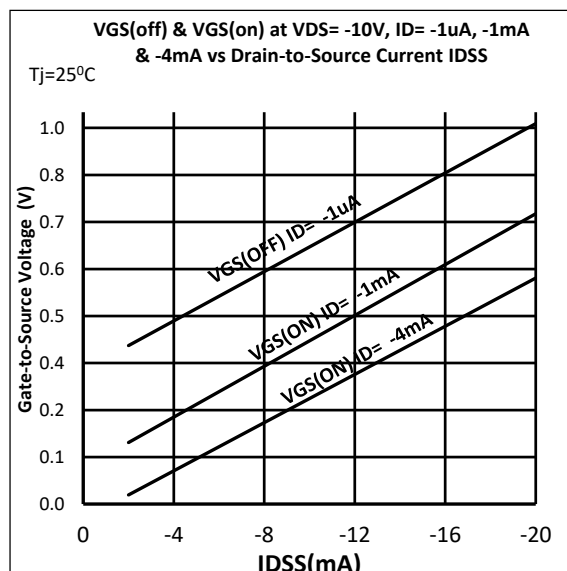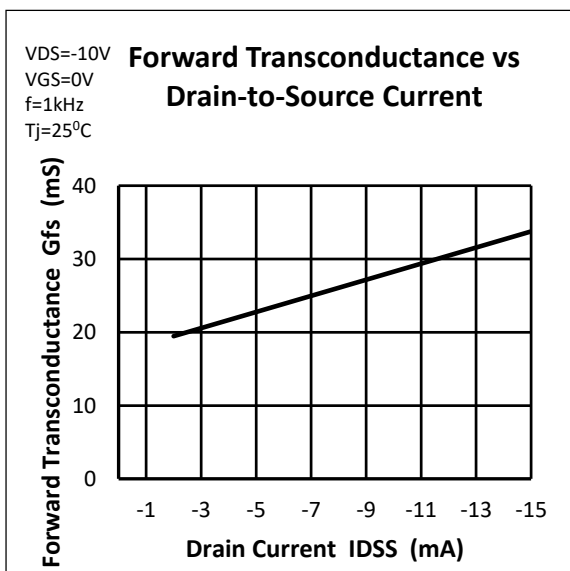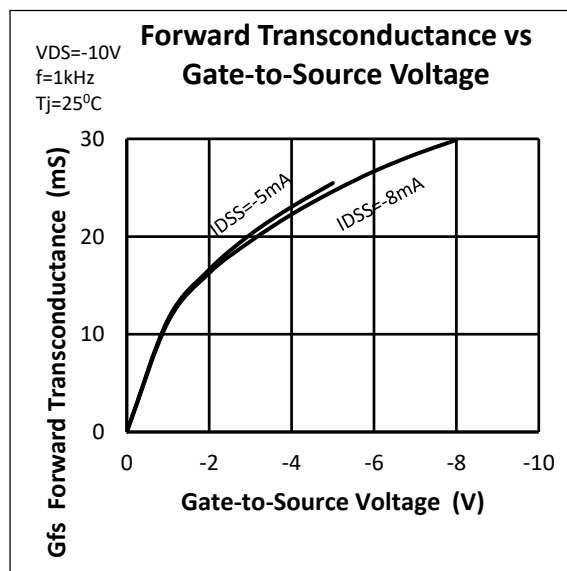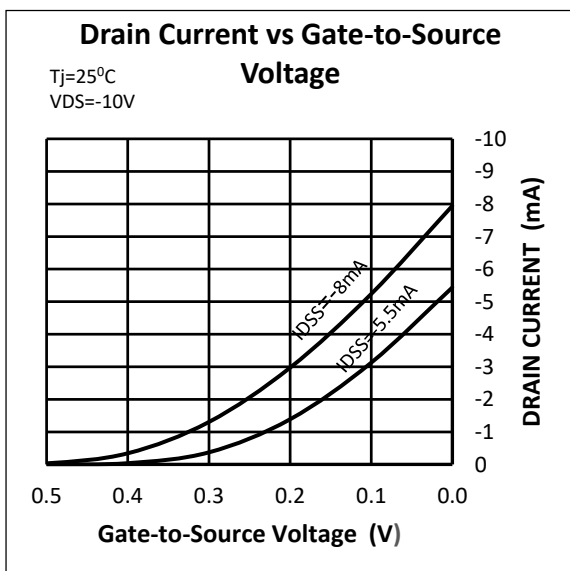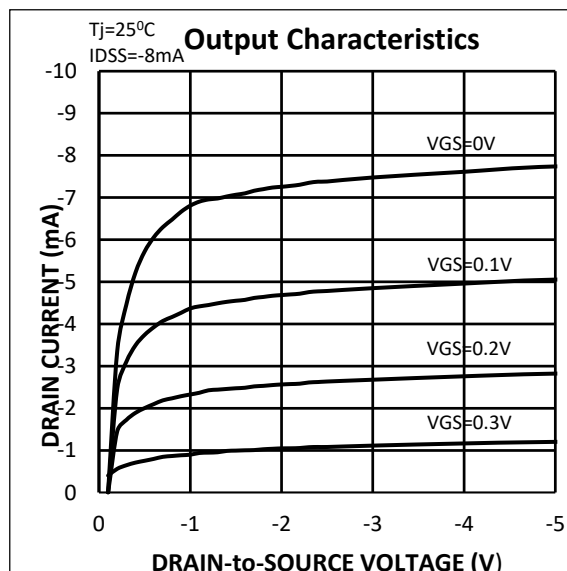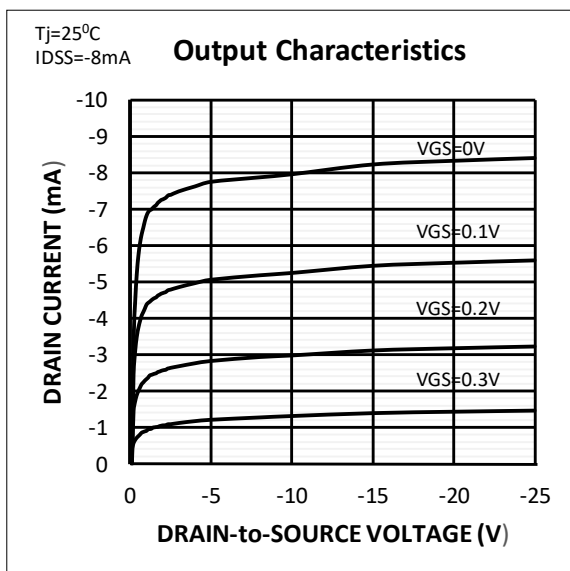

TYPICAL CHARACTERISTICS (CONT'D)

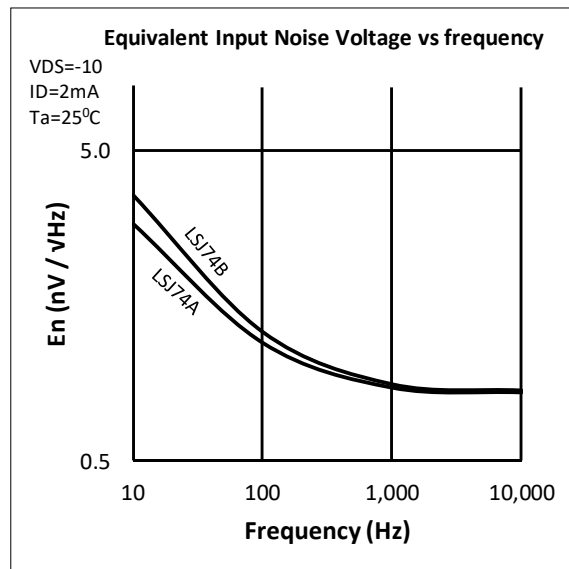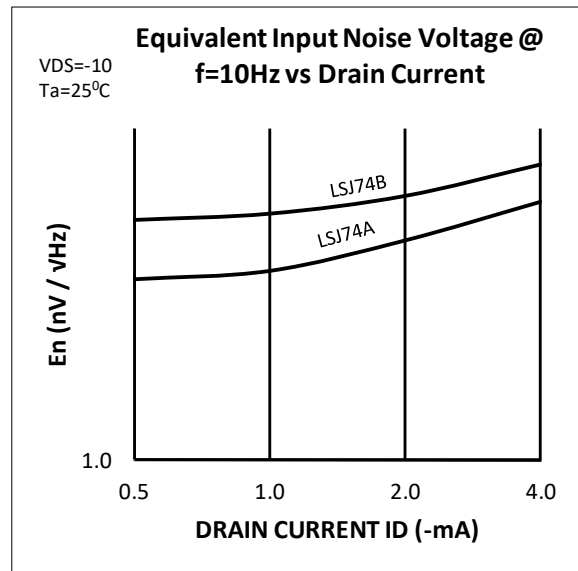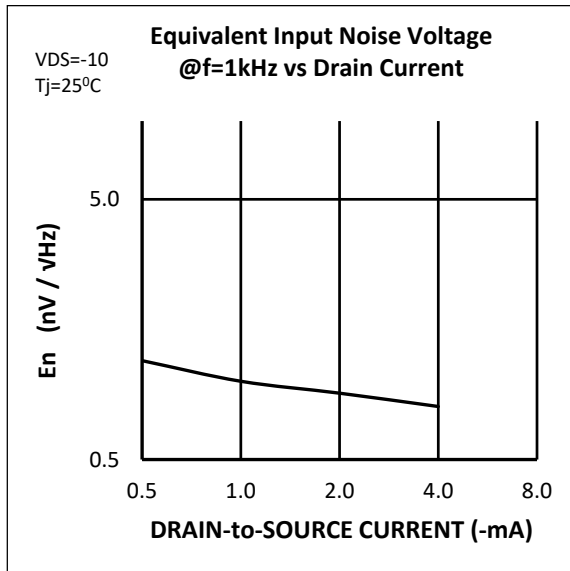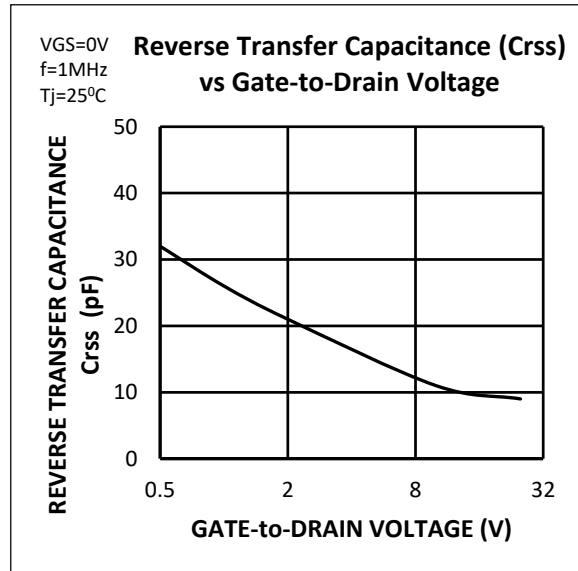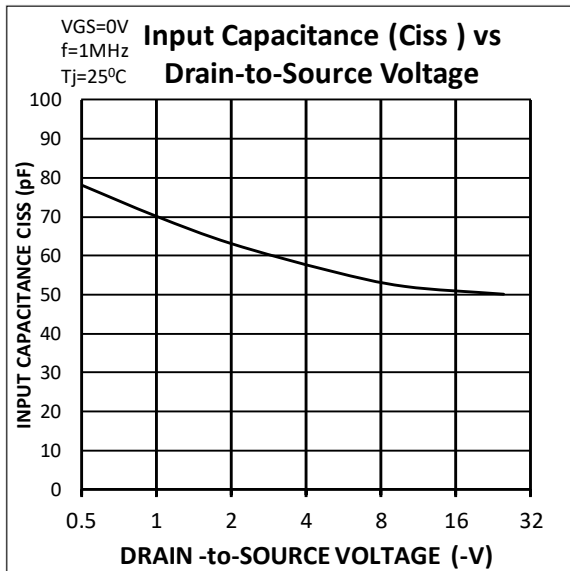

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Linear Integrated Systems:](#)

[LSJ74A TO-92 3L](#)