




Improved Standard Products®

U/J/SST308 SERIES

**SINGLE N-CHANNEL
HIGH FREQUENCY
JFET AMPLIFIER**

FEATURES	
Direct Replacement For SILICONIX U/J/SST308 SERIES	
OUTSTANDING HIGH FREQUENCY GAIN	$G_{pg} = 11.5\text{dB}$
LOW HIGH FREQUENCY NOISE	$NF = 2.7\text{dB}$
ABSOLUTE MAXIMUM RATINGS ¹	
@ 25 °C (unless otherwise stated)	
Maximum Temperatures	
Storage Temperature	-55 to 150°C
Junction Operating Temperature	-55 to 150°C
Maximum Power Dissipation	
Continuous Power Dissipation (J/SST) ⁴	350mW
Continuous Power Dissipation (U) ⁵	500mW
Maximum Currents	
Gate Current (J/SST)	10mA
Gate Current (U)	20mA
Maximum Voltages	
Gate to Drain	-25V
Gate to Source	-25V

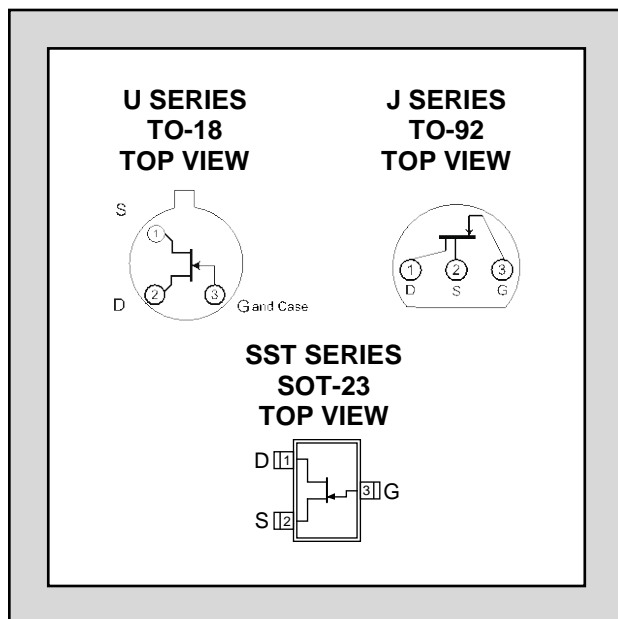

COMMON ELECTRICAL CHARACTERISTICS @ 25 °C (unless otherwise stated)


SYMBOL	CHARACTERISTIC		MIN	TYP	MAX	UNIT	CONDITIONS
BV _{GSS}	Gate to Source Breakdown Voltage		-25			V	I _G = -1μA, V _{DS} = 0V
V _{GS(F)}	Gate to Source Forward Voltage		0.7		1.15		I _G = 10mA, V _{DS} = 0V
I _G	Gate Operating Current			-15		pA	V _{DG} = 9V, I _D = 10mA
r _{DS(on)}	Drain to Source On Resistance			35		Ω	V _{GS} = 0V, I _D = 1mA
e _n	Equivalent Noise Voltage			6		nV/√Hz	V _{DS} = 10V, I _D = 10mA, f = 100Hz
NF	Noise Figure	f = 105MHz		1.5		dB	V _{DS} = 10V, I _D = 10mA
		f = 450MHz		2.7			
G _{pg}	Power Gain ²	f = 105MHz		16			
		f = 450MHz		11.5			
g _{fg}	Forward Transconductance	f = 105MHz		14		mS	
		f = 450MHz		13			
g _{og}	Output Conductance	f = 105MHz		0.16			
		f = 450MHz		0.55			
IGSS	Gate Reverse Current				-1	nA	V _{GS} = -15V, V _{DS} = 0V

SPECIFIC ELECTRICAL CHARACTERISTICS @25 °C (unless otherwise stated)

SYM.	CHARACTERISTIC	TYP	J/SST308		J/SST309		J/SST310		UNIT	CONDITIONS
			MIN	MAX	MIN	MAX	MIN	MAX		
V _{GS(off)}	Gate to Source Cutoff Voltage		-1	-6.5	-1	-4	-2	-6.5	V	V _{DS} = 10V, I _D = 1nA
I _{DSS}	Source to Drain Saturation Current ³		12	75	12	30	24	75	mA	V _{DS} = 10V, V _{GS} = 0V
C _{iss}	Input Capacitance	4							pF	V _{DS} = 10V, V _{GS} = -10V f = 1MHz
C _{rss}	Reverse Transfer Capacitance	1.9								
g _{fs}	Forward Transconductance	14	8		10		8		mS	V _{DS} = 10V, I _D = 10mA f = 1kHz
g _{os}	Output Conductance	110		250		250		250	μS	

SPECIFIC ELECTRICAL CHARACTERISTICS @25 °C (unless otherwise stated)

SYM.	CHARACTERISTIC	TYP	U308		U309		U310		UNIT	CONDITIONS
			MIN	MAX	MIN	MAX	MIN	MAX		
V _{GS(off)}	Gate to Source Cutoff Voltage		-1	-6.5	-1	-4	-2.5	-6.5	V	V _{DS} = 10V, I _D = 1nA
I _{DSS}	Source to Drain Saturation Current ³		12	75	12	30	24	75	mA	V _{DS} = 10V, V _{GS} = 0V
C _{iss}	Input Capacitance	4		5		5		5	pF	V _{DS} = 10V, V _{GS} = -10V f = 1MHz
C _{rss}	Reverse Transfer Capacitance	1.9		2.5		2.5		2.5		
g _{fs}	Forward Transconductance	14	10		10		10		mS	V _{DS} = 10V, I _D = 10mA f = 1kHz
g _{os}	Output Conductance	110		250		250		250	μS	

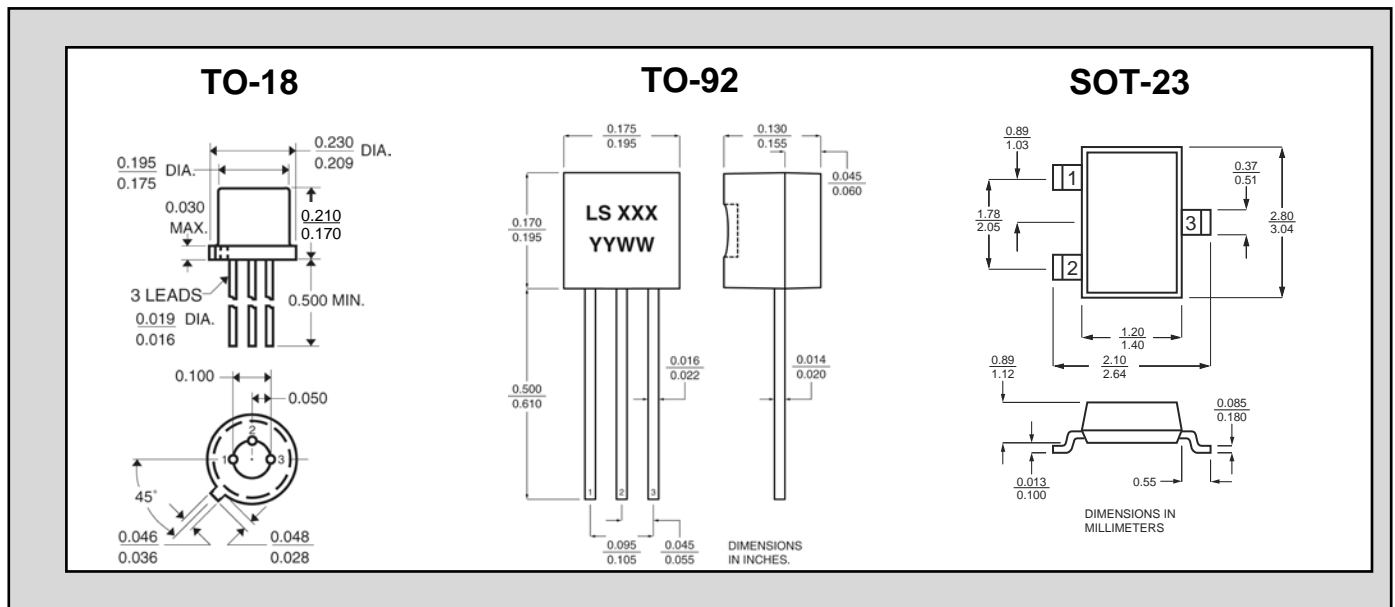

NOTES

1. Absolute maximum ratings are limiting values above which serviceability may be impaired.
2. Measured at optimum input noise match
3. Pulse test: PW ≤ 300μs, Duty Cycle ≤ 3%
4. Derate 2.8mW/°C above 25°C
5. Derate 4mW/°C above 25°C

Information furnished by Linear Integrated Systems is believed to be accurate and reliable. However, no responsibility is assumed for its use; nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Linear Integrated Systems.

Linear Integrated Systems develops and produces the highest performance semiconductors of their kind in the industry. Linear Systems, founded in 1987, uses patented and proprietary processes and designs to create its high performance discrete semiconductors. Expertise brought to the company is based on processes and products developed at Amelco, Union Carbide, Intersil and Micro Power Systems by company founder John H. Hall.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Linear Integrated Systems:

[SST309-SOT-23-3L-TR](#) [SST310-SOT-23-3L-TR](#) [SST309-SOT-23-3L-CT](#) [SST310-SOT-23-3L-CT](#)