



## A Tallysman Accutenna® TW3600 Permanent Mount Iridium® Antenna


The TW3600 employs Tallysman's unique *Accutenna* technology in a permanent mount, passive right hand circularly polarised antenna for the 1616 to 1626.5 MHz frequency band, specially designed to maximise the performance of Iridium™ voice and data modems.

The TW3600 features a high performance dual-feed patch element that provides great axial ratio (3dB max) over the entire Iridium™ frequency band, thus signals at the band edges remain truly circular, unlike the response of single feed antennas.

The TW3600 is housed in a permanent mount industrial-grade weather-proof enclosure and comes with a TNC Jack (female) connector, allowing for the Iridium™ modem to be mounted out of the elements and reach, and still providing excellent Iridium™ signal coverage.



TW3600 Dimensions (mm)

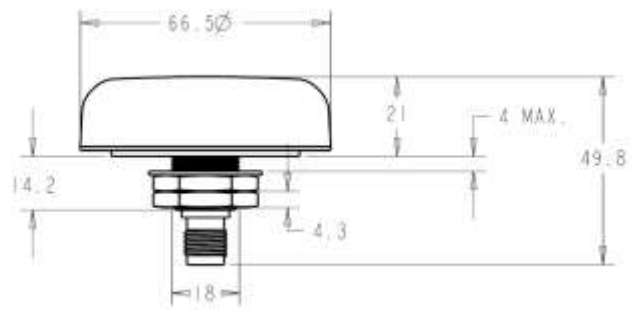

### Applications

- Iridium® Voice and Data Applications
- Sea & Land Container Tracking
- Military & Security
- Fleet Management & Asset Tracking
- Marine & Avionics Systems
- Law Enforcement & Public Safety

### Features

- Custom high gain, 4.25 dBic dual-feed patch
- Great axial ratio, 3 dB over full bandwidth
- 15 KV ESD circuit protection
- IP67 weather proof housing
- Robust Industrial grade enclosure
- Surface, bracket or mast mount

### Benefits

- Excellent circular polarized signal transmission
- Industrial temperature range
- Rugged Design
- Ideal for harsh environments
- RoHS and REACH compliant
- Remote antenna



# TW3600 Permanent Mount Iridium® Antenna

## Specifications Vcc = 3V, over full bandwidth, T=25°C

### Antenna

Architecture	Dual, quadrature feeds
Antenna Gain (100mm ground plane)	4.25 dBic
Axial Ratio (over full bandwidth)	≤3 dB
Radiated Bandwidth (-0.5 dB)	1605 MHz to 1635 MHz

### Electrical

Architecture	Hybrid 90° phase signal splitter
Frequency Bandwidth	1616 to 1626.5 MHz
Polarization	RHCP
Gain flatness	≤0.5 dB, from 1616 to 1626.5 MHz
VSWR (at antenna)	<1.5:1
Return Loss (-10 dB bandwidth)	>20 MHz
ESD Circuit protection	15 KV air discharge

### Mechanicals & Environmental

Mechanical Size	66.5 mm dia. x 21 mm H
Cable (Option)	Custom cable assembly available.
Operating Temp. Range	-40 to +85 °C
Enclosure	Radome: EXL9330, Base: Zamak White Metal
Weight	150 g
Attachment Method	Permanent 3/4" (19mm) through hole mount
Environmental	IP67 and RoHS compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G
Warranty	One year, parts and labour
Salt Spray	MIL-STD-810F Section 509.4

### Ordering Information

TW3600 – Iridium® antenna      33-3600-xx-yy-zzzz

Where xx = connector type, yy = shape and colour of radome and zzzz = cable length in mm (where applicable)

Please refer to the Ordering Guide (<http://www.tallysman.com/orderingguide.php>) for the current and complete list of available radomes and connectors.

### Tallysman Wireless Inc

36 Steacie Drive  
Ottawa ON K2K 2A9 Canada Canada  
Tel 613 591 3131      Fax 613 591 3121  
[sales@tallysman.com](mailto:sales@tallysman.com)

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2010 Tallysman Wireless Inc. All rights reserved. Rev 3.2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Calian:](#)

[33-3600-01-11](#) [33-3600-01-01](#)