

ECO60 Signal tower



Modular

- Ø 60 mm modular signal tower series
- Complete range of high-luminosity LED light modules with
- steady/flashing/strobe beacon functions,
- 6 different lens colours
- High-performance steady and multi-strobe beacon modules
- Alternatively operated with conventional incandescent bulb technology
- Piezo buzzer module available with steady/pulsing tone
- Pre-assembled towers or individual tower modules available for configuration
- Extensive range of mounting types
- User-friendly connection technology
- PLC-suitable
- High degree of protection IP66, UL type 4/4X/13

TECHNICAL DATA

Housing	Ø 60 mm, Polycarbonate black
Lens	Polycarbonate, ribbed inside orange, red, clear, blue, green or yellow
Type of mounting	any
Connection technology	up to 2,5mm² / 1½ AWG
Leakage current	> 0,003 A (PLC-suitable)
Beacon type	LED steady beacon, LED flashing beacon, LED strobe beacon, HP LED steady beacon, HP LED multi strobe beacon or Steady beacon (incandescent bulb)
Light source	8 LEDs, 2 high-power LEDs, incandescent bulb
Strobe/flash frequency	Flashing beacon 2 Hz, strobe beacon 1.4 Hz, multi strobe beacon 1-2.6 Hz
Tone	Steady tone or Pulsing tone
Volume	90 dB
Tone frequency	2.500 Hz
Duty cycle	100 %
Service life	Light source: LED 100,000 hours, HP LED 50,000 hours
Number of possible modules	max. 5, with double bracket max. 10
Operating temperature	-30 °C / +60 °C
Degree of protection	IP66 & UL Type 4/4X/13
Weight (modules)	63-83 g



ECO60 Pre-configured Signal towers



Order number: ECO60-Q01
Colours: red/orange/green
Function: LED steady beacon
Nominal voltage: 24 V AC/DC
Type of mounting: Tube mounting
(100 mm tube length)



Order number: ECO60-Q02
Colours: red/green
Function: LED steady beacon
Nominal voltage: 24 V AC/DC
Type of mounting: Tube mounting
(100 mm tube length)



Order number: ECO60-Q05
Colours: red/orange/green/blue
Function: LED steady beacon
Nominal voltage: 24 V AC/DC
Type of mounting: Tube mounting
(100 mm tube length)



Order number: ECO60-Q31
Colours: red/orange/green
Function: LED steady beacon, buzzer
steady or pulsing tone
Nominal voltage: 24 V AC/DC
Type of mounting: Tube mounting
(100 mm tube length)




Order number: ECO60-Q81
Colours: red/orange/green
Function: LED steady beacon, buzzer
steady or pulsing tone
Nominal voltage: 230 V AC
Type of mounting: Tube mounting
(100 mm tube length)


ECO60



Modular

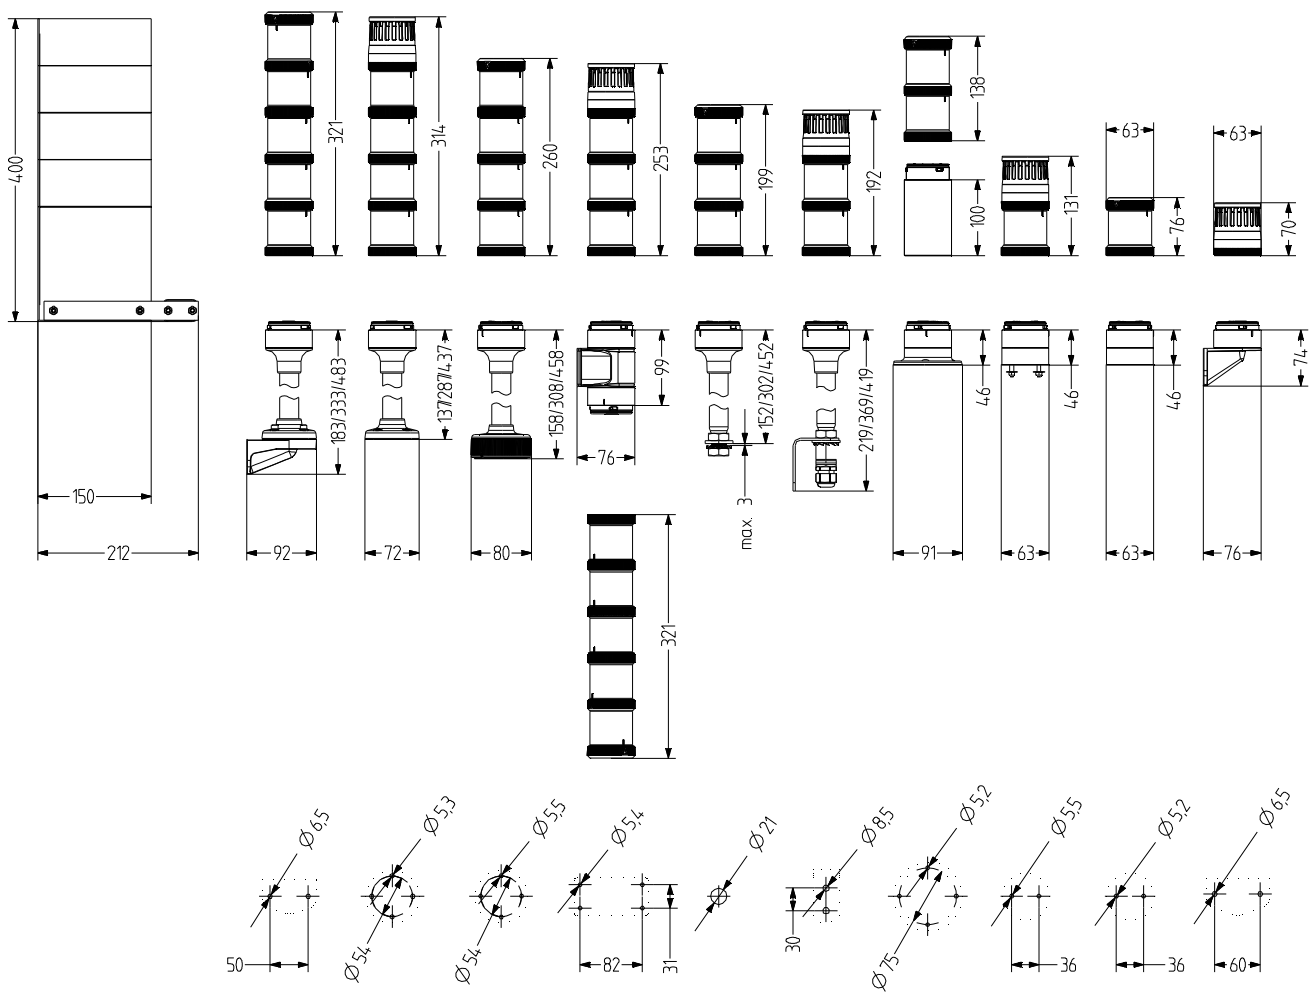

ECO60

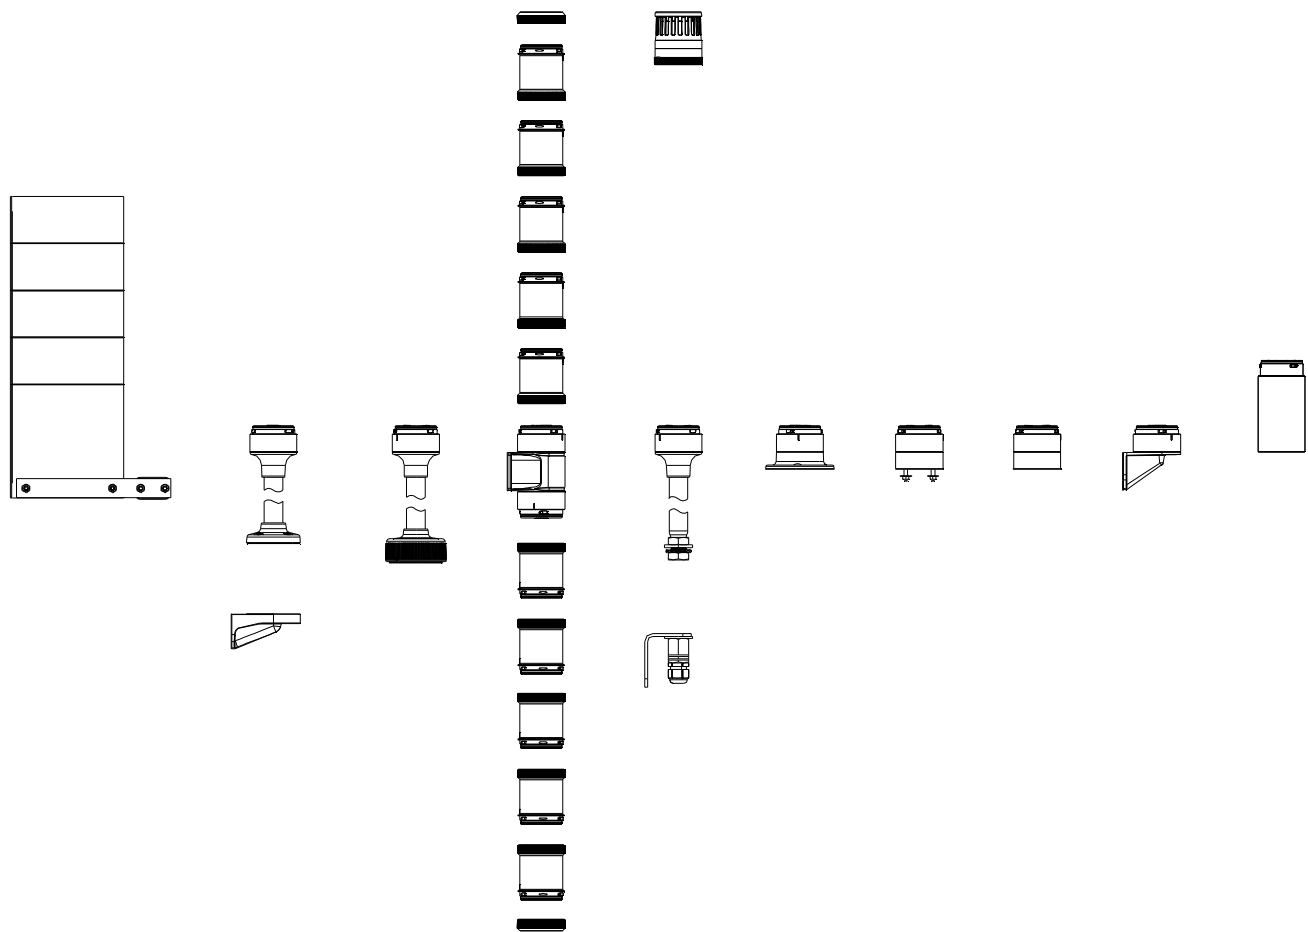

ECO60

VISUAL MODULES



Type	Beacon type	Lens colour	Nominal voltage	Voltage range [V]	Nominal current [A]	Order number	Item Nr.
YLL	Steady beacon	orange	12-250 V AC/DC		4 W	901 001 900	901 001 900
		red	12-250 V AC/DC		4 W	901 002 900	901 002 900
		clear	12-250 V AC/DC		4 W	901 004 900	901 004 900
		blue	12-250 V AC/DC		4 W	901 005 900	901 005 900
		green	12-250 V AC/DC		4 W	901 006 900	901 006 900
		yellow	12-250 V AC/DC		4 W	901 007 900	901 007 900
YDC	LED steady beacon	orange	24 V AC/DC	+/- 10 %	0,022-0,033	901 011 405	901 011 405
			110-120 V AC	+/- 10 %	0,029-0,090	901 011 310	901 011 310
			230-240 V AC	+/- 10 %	0,029-0,090	901 011 313	901 011 313
		red	24 V AC/DC	+/- 10 %	0,022-0,033	901 012 405	901 012 405
			110-120 V AC	+/- 10 %	0,029-0,090	901 012 310	901 012 310
			230-240 V AC	+/- 10 %	0,029-0,090	901 012 313	901 012 313
		clear	24 V AC/DC	+/- 10 %	0,022-0,033	901 014 405	901 014 405
			110-120 V AC	+/- 10 %	0,029-0,090	901 014 310	901 014 310
			230-240 V AC	+/- 10 %	0,029-0,090	901 014 313	901 014 313
		blue	24 V AC/DC	+/- 10 %	0,022-0,033	901 015 405	901 015 405
			110-120 V AC	+/- 10 %	0,029-0,090	901 015 310	901 015 310
			230-240 V AC	+/- 10 %	0,029-0,090	901 015 313	901 015 313
		green	24 V AC/DC	+/- 10 %	0,022-0,033	901 016 405	901 016 405
			110-120 V AC	+/- 10 %	0,029-0,090	901 016 310	901 016 310
			230-240 V AC	+/- 10 %	0,029-0,090	901 016 313	901 016 313
		yellow	24 V AC/DC	+/- 10 %	0,022-0,033	901 017 405	901 017 405
			110-120 V AC	+/- 10 %	0,029-0,090	901 017 310	901 017 310
			230-240 V AC	+/- 10 %	0,029-0,090	901 017 313	901 017 313
YDA	LED flashing beacon	orange	24 V AC/DC	+/- 10 %	0,028-0,036	901 021 405	901 021 405
			110-120 V AC	+/- 10 %	0,030	901 021 310	901 021 310
			230-240 V AC	+/- 10 %	0,030	901 021 313	901 021 313
		red	24 V AC/DC	+/- 10 %	0,028-0,036	901 022 405	901 022 405
			110-120 V AC	+/- 10 %	0,030	901 022 310	901 022 310
			230-240 V AC	+/- 10 %	0,030	901 022 313	901 022 313
		clear	24 V AC/DC	+/- 10 %	0,028-0,036	901 024 405	901 024 405
			110-120 V AC	+/- 10 %	0,030	901 024 310	901 024 310
			230-240 V AC	+/- 10 %	0,030	901 024 313	901 024 313
		blue	24 V AC/DC	+/- 10 %	0,028-0,036	901 025 405	901 025 405
			110-120 V AC	+/- 10 %	0,030	901 025 310	901 025 310
			230-240 V AC	+/- 10 %	0,030	901 025 313	901 025 313
		green	24 V AC/DC	+/- 10 %	0,028-0,036	901 026 405	901 026 405
			110-120 V AC	+/- 10 %	0,030	901 026 310	901 026 310
			230-240 V AC	+/- 10 %	0,030	901 026 313	901 026 313
		yellow	24 V AC/DC	+/- 10 %	0,028-0,036	901 027 405	901 027 405
			110-120 V AC	+/- 10 %	0,030	901 027 310	901 027 310
			230-240 V AC	+/- 10 %	0,030	901 027 313	901 027 313



Modular

ECO60

VISUAL MODULES

Type	Beacon type	Lens colour	Nominal voltage	Voltage range [V]	Nominal current [A]	Order number	Item Nr.
YDF	LED strobe beacon	orange	24 V AC/DC	+/- 10 %	0,035-0,065	901 031 405	901 031 405
			110-120 V AC	+/- 10 %	0,010	901 031 310	901 031 310
			230-240 V AC	+/- 10 %	0,010	901 031 313	901 031 313
		red	24 V AC/DC	+/- 10 %	0,035-0,065	901 032 405	901 032 405
			110-120 V AC	+/- 10 %	0,010	901 032 310	901 032 310
			230-240 V AC	+/- 10 %	0,010	901 032 313	901 032 313
		clear	24 V AC/DC	+/- 10 %	0,035-0,065	901 034 405	901 034 405
			110-120 V AC	+/- 10 %	0,010	901 034 310	901 034 310
			230-240 V AC	+/- 10 %	0,010	901 034 313	901 034 313
		blue	24 V AC/DC	+/- 10 %	0,035-0,065	901 035 405	901 035 405
			110-120 V AC	+/- 10 %	0,010	901 035 310	901 035 310
			230-240 V AC	+/- 10 %	0,010	901 035 313	901 035 313
		green	24 V AC/DC	+/- 10 %	0,035-0,065	901 036 405	901 036 405
			110-120 V AC	+/- 10 %	0,010	901 036 310	901 036 310
			230-240 V AC	+/- 10 %	0,010	901 036 313	901 036 313
		yellow	24 V AC/DC	+/- 10 %	0,035-0,065	901 037 405	901 037 405
			110-120 V AC	+/- 10 %	0,010	901 037 310	901 037 310
			230-240 V AC	+/- 10 %	0,010	901 037 313	901 037 313
YDC-HP	LED steady beacon	orange	24 V AC/DC	18-26 V AC 18-30 V DC	0,130-0,150	901 051 405	901 051 405
		red	24 V AC/DC	18-26 V AC 18-30 V DC	0,130-0,150	901 052 405	901 052 405
		clear	24 V AC/DC	18-26 V AC 18-30 V DC	0,130-0,150	901 054 405	901 054 405
		blue	24 V AC/DC	18-26 V AC 18-30 V DC	0,130-0,150	901 055 405	901 055 405
		green	24 V AC/DC	18-26 V AC 18-30 V DC	0,130-0,150	901 056 405	901 056 405
		yellow	24 V AC/DC	18-26 V AC 18-30 V DC	0,130-0,150	901 057 405	901 057 405
YFF-HP	LED multi strobe beacon	orange	24 V AC/DC	18-26 V AC 18-30 V DC	0,190-0,250	901 071 405	901 071 405
		red	24 V AC/DC	18-26 V AC 18-30 V DC	0,190-0,250	901 072 405	901 072 405
		clear	24 V AC/DC	18-26 V AC 18-30 V DC	0,190-0,250	901 074 405	901 074 405
		blue	24 V AC/DC	18-26 V AC 18-30 V DC	0,190-0,250	901 075 405	901 075 405
		green	24 V AC/DC	18-26 V AC 18-30 V DC	0,190-0,250	901 076 405	901 076 405
		yellow	24 V AC/DC	18-26 V AC 18-30 V DC	0,190-0,250	901 077 405	901 077 405

ECO60



AUDIBLE MODULES

Type	Tone	Volume	Nominal voltage	Voltage range (V)	Nominal current (A)	Order number
YDE	Piezo buzzer module steady tone/pulsing tone	90 dB	24 V AC/DC	+/- 10 %	0,065	901 500 405
			110-120 V AC	+/- 10 %	0,031	901 500 310
			230-240 V AC	+/- 10 %	0,032	901 500 313



Modular

ORDER DATA - BASE



YMW



YMS



YMF



YMC



YMV



YMR



YMR



YNW



YSW



YFR

Type	Type of accessory	Tube length	Order number
YMW	Base for horizontal mounting M20, inside mounting holes		901 570 900
YMS	Base for horizontal mounting with pre-mounted fixing screws		901 571 900
YMF	Base for horizontal mounting with external mounting holes		901 572 900
YMC	Base for horizontal mounting with external mounting holes and integrated 5-pole M12 connector		901 572 911
YMV	Base for vertical mounting for single-sided mounting		901 573 900
YZV	Base for vertical mounting for double-sided mounting		901 574 900
YMR	Tube base 100 mm on aluminium tube with plastic foot	100 mm	901 582 900
	Tube base 250 mm on aluminium tube with plastic foot	250 mm	901 583 900
	Tube base 400 mm on aluminium tube with plastic foot	400 mm	901 584 900
YNW	Tube base NPT 1/2" thread		901 570 950
YSW	Tube base 100 mm on aluminium tube for horizontal mounting with banjo bolt	100 mm	901 592 900
	Tube base 250 mm on aluminium tube for horizontal mounting with banjo bolt	250 mm	901 593 900
	Tube base 400 mm on aluminium tube for horizontal mounting with banjo bolt	400 mm	901 594 900
YFR	Quick mounting system 'foot adapter' 100 mm on aluminium tube with foot adapter		901 562 900
	Quick mounting system 'foot adapter' 250 mm on aluminium tube with foot adapter		901 563 900
	Quick mounting system 'foot adapter' 400 mm on aluminium tube with foot adapter		901 564 900

ACCESSORIES



XWR



XSS



XIB



WYC



YEP



BDV



BDW



BDM

Type	Type of accessory	Weight	Order number
XWR	Bracket for vertical mounting of TMR/UMR tube base	95 g	900 600 900
XSS	Set Set for vertical mounting (bracket, cable gland)	135 g	900 700 900
XIB	Identification plate	235 g	900 850 900
WYC	Metal bracket for YMC		901 573 910
YEP	Base extension 100 mm long, suitable for all bases		901 800 900
BDV	Junction box for vertical mounting, M20 cable gland		841 511 900
	Junction box for vertical mounting, NPT 1/2" cable gland		841 512 900
BDW	Junction box for horizontal mounting, M20 cable gland		841 501 900
	Junction box for horizontal mounting, NPT 1/2" cable gland		841 502 900
BDM	Junction box for magnetic mounting, M20 cable gland		841 521 900
	Junction box for magnetic mounting, NPT 1/2" cable gland		841 522 900

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Auer Signal:](#)

[ECO60-Q01](#) [ECO60-Q02](#) [ECO60-Q31](#)