

# 1/4" PHONE PLUGS

### M SERIES - TS & TRS

Io Audio Technologies' M Series ¼" plugs are designed to have a fun and unique appearance. Available in this series are two, and three poles straight nickel plated plugs for audio and control applications.



### **SPECIFICATIONS**

### PRODUCT

Gender: Male

Contacts: 2 (IO-M2MBL), 3 (IO-M3MBL)

### ELECTRICAL

Capacitance Between Contacts: < 8.4 pF Capacitance Between Contact and Ground: < 7.4 pF Contact Resistance: Depends on Mating Connector Insulation Resistance: ≥ 100 MΩ Dielectric Strength: 500 V AC @ 60 s Rated Voltage: < 100 V DC Rated Current Per Contact: Depends on Mating Connector ENVIRONMENTAL

Standard Compliance: IEC 60603-11 / EIA RS-453 Temperature Range: -40°C ~ +70° C (-40°F ~ +158°F)

### MECHANICAL

Lifetime: > 1000 Mating Cycles Cable O.D.: 4.0 - 6.4mm Wiresize: 2.0mm O.D. Max

Wiring: Solder Contacts

Solderability: Complies with IEC 60068-2-20

### MATERIAL

Plug: Brass Plug Plating: Nickel Contacts: Brass Contact Plating: Tin Shell: Die Cast Zinc Shell Plating: Nickel Plastic Tube: Polypropylene Strain Relief: POM Bushing: Polyamide Bushing Color: Black and Blue

Product specifications may change without prior notification


Io Audio Technologies® is a registered trademark of Knight Electronics, Inc. 10557 Metric Dr. Dallas, TX 75243 | 214-340-0265 | 800-323-2439 | Fax: 214-340-5870 | www.ioaudiotechnologies.com



## DRAWINGS

### IO-M2MBL

**IO-M3MBL** 

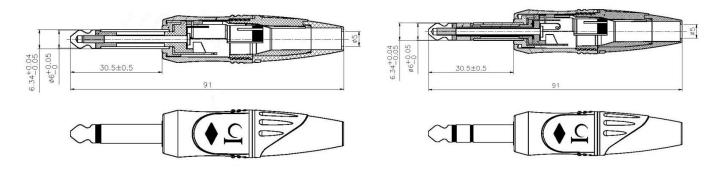

## **FEATURES & APPLICATIONS**

The M Series 1/4" plugs feature an extremely durable nickel plated brass shell and include a sturdy plastic insert that tightens onto the cable to provide strain relief while an additional rubber boot delivers extended support. The nickel plated plug contacts and tin plated wire terminals all ensure the best possible signal flow. Additionally, a thicker thread gauge means the threads will be less prone to strip compared to other similar plugs. These connectors also feature larger solder terminals and no tool housing assembly for ease of termination.

M Series ¼" connectors meet the most recent requirements for highest density jack fields (15.88), so they can be used in a variety of applications including use with various instruments and patch bays for home or professional studios.

### PART NUMBER BREAKDOWN

IO-<u>M</u>2MBL Series Identifier IO-M<u>2</u>MBL Number of contacts IO-M2<u>M</u>BL Gender IO-M2M<u>BL</u> Body Color

### **STANDARDS & CLASSIFICATIONS**



Product specifications may change without prior notification

Io Audio Technologies® is a registered trademark of Knight Electronics, Inc. 10557 Metric Dr. Dallas, TX 75243 | 214-340-0265 | 800-323-2439 | Fax: 214-340-5870 | www.ioaudiotechnologies.com

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

IO-M2MBL IO-M3MBL