



APM-MAX

M21 and M23

EVALUATION KIT AVAILABLE
Contact us to request yours



Designed for a wide range of power monitoring applications, the APM-MAX combines the instant visual representation of an analog meter with the speed and accuracy of a digital meter for instant recognition and precision measurement. The large 81.5mm x 66mm display features a two-line display, programmable scale, alarm set-points and color-changing, full color RGB backlight for instant alerts.

APM-MAX-M21: for high voltage applications; configurable as an ammeter, volt meter, frequency meter or power monitor (Watts, VA & Power Factor).
APM-MAX-M23: for low voltage applications; configurable as a process meter or to be used in conjunction with a shunt.

Both models feature digital and analog outputs and serial MODBUS® RTU as standard (ethernet MODBUS® also available) for communication with other components in a system as well as an IP65 rating and our industry leading three-year warranty.

Go to www.trumeter.com/apm for further information

Specifications

MEASUREMENT

	M21	M23
Input range (V1)	0-600V DC/AC 47-63Hz	0-10V DC
Current Input range (Direct)	0-5A DC/AC 45-65Hz	0-50mA DC
Current Input range (w/shunt)	0-500mV DC/AC 45-65Hz	0-500mV DC
Frequency (AC)	0-400Hz	0-400Hz
Power Measurement	Watts, VA & Power Factor	-
Accuracy (Frequency)	0.1%	
Accuracy (Voltage)	0.5%	
Display modes	RMS	

ENVIRONMENTAL

Temperature - operating	-10 to +60°C
Temperature - storage	-40 to +70°C
IP rating (from the front)	IP65

POWER SUPPLY

Universal (AC)	100-240V AC (50-60Hz)
Low Voltage (DC)	12-24V DC (50-60Hz AC)

DISPLAY

Number of digits	4
Digit height	14.5mm [0.57"]
Digit height of annunciator	6.8mm [0.27"]
Number of message characters	4
Backlight colors	Full RGB backlight and White
LCD display	Positive or Negative

OUTPUTS

Max voltage	34V
Max current	500mA
Analog output	4-20mA or 0-10V

COMMUNICATION

Modbus®	RTU and/or TCP/IP
---------	-------------------

CERTIFICATION

UL and cUL, CE, UKCA

Large multi-format display that incorporates:

- 60 segment bar graph display
- Large 4 digit display
- Separate Starburst display area for annunciators, custom messages and alarm info
- Full color RGB dynamic backlight for user alerts

Programmable:

- Scaling and Range (min and max)
- Custom annunciators
- User selectable backlight color and intensity
- Two independent alarm set-points
- Two independent outputs
- 4-20mA analog monitor output

Visibility:

- The largest display of any APM
- User adjustable RGB backlight provides an almost infinite range of colors for different requirements or environmental conditions.
- Wide viewing angle (both horizontal and vertical)
- Custom annunciators

Part Numbers

Standard Models - Modbus RTU

- APM-MAX-M21-PU-4R** Positive LCD, volt, amp, freq or power monitor, RTU
APM-MAX-M23-PU-4R Positive LCD, process or shunt meter, RTU
APM-MAX-M21-NU-4R Negative LCD, volt, amp, freq or power monitor, RTU
APM-MAX-M23-NU-4R Negative LCD, process or shunt meter, RTU
APM-MAX-M21-PL-4R Positive LCD, low voltage, volt, amp, freq or power monitor, RTU
APM-MAX-M23-PL-4R Positive LCD, low voltage, process or shunt meter, RTU
APM-MAX-M21-NL-4R Negative LCD, low voltage, volt, amp, freq or power monitor, RTU
APM-MAX-M23-NL-4R Negative LCD, low voltage, process or shunt meter, RTU

Standard Models - Modbus TCP/IP and RTU

- APM-MAX-M21-PU-4B** Positive LCD, volt, amp, freq or power monitor, TCP/IP and RTU
APM-MAX-M23-PU-4B Positive LCD, process or shunt meter, TCP/IP and RTU
APM-MAX-M21-NU-4B Negative LCD, volt, amp, freq or power monitor, TCP/IP and RTU
APM-MAX-M23-NU-4B Negative LCD, process or shunt meter, TCP/IP and RTU
APM-MAX-M21-PL-4B Positive LCD, low voltage, volt, amp, freq or power monitor, TCP/IP and RTU
APM-MAX-M23-PL-4B Positive LCD, low voltage, process or shunt meter, TCP/IP and RTU
APM-MAX-M21-NL-4B Negative LCD, low voltage, volt, amp, freq or power monitor, TCP/IP and RTU
APM-MAX-M23-NL-4B Negative LCD, low voltage, process or shunt meter, TCP/IP and RTU


Options

DESCRIPTOR	DEFINITION	OPTIONS
-?X-XX	LCD Type	P - Positive N - Negative LCD also available
-X?-XX	PSU Type	U - Universal 100-240V AC 50-60Hz L - Low Voltage 12-24V DC / 50-60Hz AC
-XX-?X	Analog Output	4 - 4 to 20mA / 0 - 20mA switchable 1 - 0 to 10V DC also available*
-XX-X?	Communications	R - Modbus® RTU B - Modbus® TCP/IP and Modbus® RTU

024569-21

MAX Meter Evaluation Kit

Dimensions:

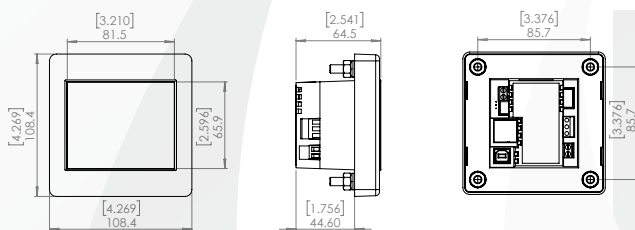

Panel cutout: Square: 68mm x 68mm [2.7" x 2.7"] Circle Diameter: 96mm [3.8"]



www.trumeter.com

Trumeter (The Americas)

6601 Lyons Rd, Suite H-7
 Coconut Creek, Florida
 FL 33073,
 USA
 Tel: +1 954 725 6699
 Email: sales.usa@trumeter.com

Trumeter (Europe)

Pilot Mill
 Alfred Street
 Bury,
 BL9 9JR
 Tel: +44 161 674 0960
 Email: sales.uk@trumeter.com

Innovative Design Technologies Sdn. Bhd

Lot 5881, Lorong Iks Bukit Minyak 1
 Taman Perindustrian Iks, 14000 Bukit Tengah
 Penang, Malaysia
 Web: www.idtworld.com
 Tel: + 604 5015700
 Email: sales.my@idtworld.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Trumeter:

[APM-MAX-M21-NL-4B](#) [APM-MAX-M21-NL-4R](#) [APM-MAX-M21-NU-4B](#) [APM-MAX-M21-NU-4R](#) [APM-MAX-M21-PL-4B](#) [APM-MAX-M21-PL-4R](#) [APM-MAX-M21-PU-4B](#) [APM-MAX-M21-PU-4R](#) [APM-MAX-M23-NL-4B](#) [APM-MAX-M23-NL-4R](#) [APM-MAX-M23-NU-4B](#) [APM-MAX-M23-NU-4R](#) [APM-MAX-M23-PL-4B](#) [APM-MAX-M23-PL-4R](#) [APM-MAX-M23-PU-4B](#) [APM-MAX-M23-PU-4R](#)