



Detector Switch > SPVQ1 Series > SPVQ130700

Water-proof Type SPVQ1 Series

Series Common Info

| Photo | Dimensions | Circuit Diagram | Packing Specifications | Soldering Conditions |

PRINT


Part number		SPVQ130700		
Poles		1		
Positions		2		
Changeover timing		Non shorting		
Operation part shape		Actuator B		
Terminal type		For PC board		
Operating force		5.9N max.		
Main body form		Boss - right side		
Operating temperature range		-40℃ to +85℃		
Rating (max.)/(min.) (Resistive load)		0.1A 12V DC/50µA 3V DC		
Electrical performance	Contact resistance (Initial/After operating life)	500m Ω max./1 Ω max.		
	Insulation resistance	100MΩ min. 500V DC		
	Voltage proof	500V AC for 1 minute		
Mechanical performance	Terminal strength	3N for 1 minute		
perrormance	Actuator strength	20N		
Durability	Operating life without load	300,000 cycles 1Ω max.		
	Operating life with load Rating (max.) (Resistive load)	300,000 cycles 1Ω max.		
Environmental performance	Cold	-40℃ 500h		
	Dry heat	85℃ 500h		
	Damp heat	60℃, 90 to 95%RH 500h		


Minimum order unit (pcs.)	Japan	600	
	Export	2,400	
3D CAD (STEP)			0
Certificate of Compliance	ance to RoHS		0

Photo




Dimensions

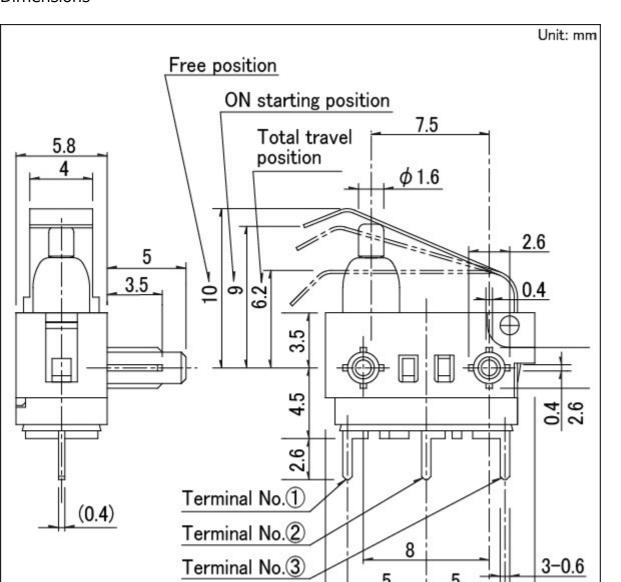



Circuit Diagram

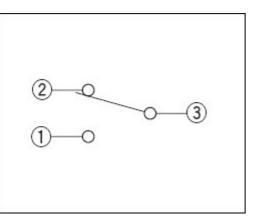

Packing Specifications

-					
г	м	-			
		а	w	,	

Number of packages 1 case / Japan 600
(pcs.)

1 case / export 2,400
packing

Export package measurements (mm) 540×360×230

Soldering Conditions

Reference for Dip Soldering

Items	Preheating temperature	100±10℃			
	Preheating time	60s max.			
Dip soldering	Soldering temperature	260±5℃			
	Duration of immersion	5±1s			
Reference for Hand Soldering					
Soldering temperature		300±10℃			
Soldering time		3+1/0s			


Notes are common to this series/models.

- 1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
- 2. The length of lead wire is 250mm. For length modification, please contact us.

- 3. This unit cannnot be used in water (IP67 rating, except for terminal).
- 4. Please place purchase orders per minimum order unit (integer).
- 5. This products can be used in vehicles.

 Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.

Inquiries about Products



COPYRIGHT© 2017 ALPS ELECTRIC CO., LTD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Alps Alpine: SPVQ130700