



Detector Switch > SPVQ3 Series > SPVQ361800

Water-proof Type SPVQ3 Series

Series Common Info

| Photo | Dimensions | Circuit Diagram | Packing Specifications |

Damp heat


PRINT

		PRINT	
Normal type: 300,0	00 cycles		
Part number		SPVQ361800	
Poles		1	
Positions		1	
Changeover timing		Non shorting	
Operation part shape	2	Push	
Terminal type		With wire (Left side)	
Operating force		1±0.5N	
Main body form		Boss - right side	
Operating temperature range		-40℃ to +85℃	
Rating (max.)/(min.) (Resistive load)		0.1A 12V DC/50μA 5V DC	
Electrical performance	Contact resistance (Initial/After operating life)	500m Ω max./1 Ω max.	
	Insulation resistance	100M Ω min. 500V DC	
	Voltage proof	500V AC for 1 minute	
Mechanical performance	Wire strength	30N for 1 minute	
	Actuator strength	20N	
Durability	Operating life without load	300,000 cycles $1Ω$ max.	
	Operating life with load Rating (max.) (Resistive load)	300,000 cycles $1Ω$ max.	
Environmental performance	Cold	-40℃ 500h	
	Dry heat	85°C 500h	


60℃, 90 to 95%RH 500h

Minimum order unit (pcs.)	Japan	400	
	Export	1,600	
3D CAD (STEP)			0
Certificate of Compliance	ance to RoHS		0


Photo

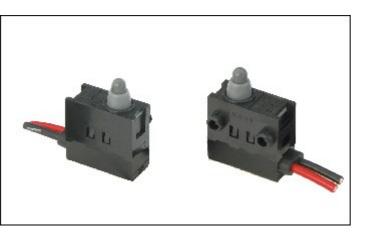

Dimensions

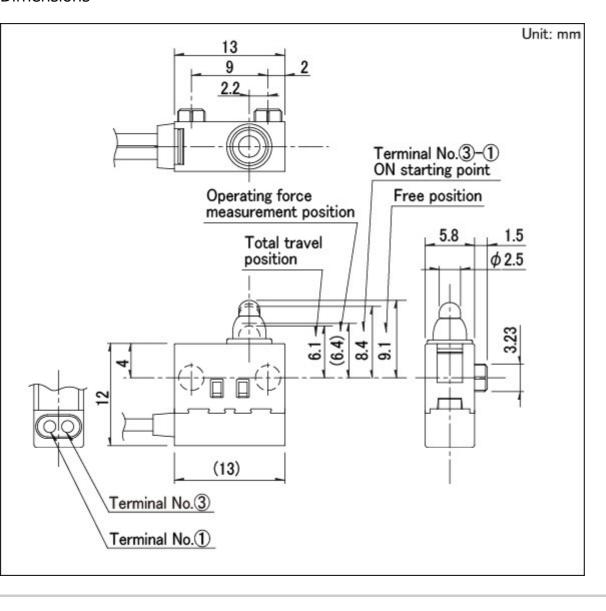

Circuit Diagram

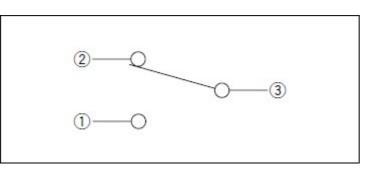

Packing Specifications

Number of packages (pcs.)	1 case / Japan	400
	1 case / export packing	1,600
Export package measurements (mm)		555×375×223

Notes are common to this series/models.

- 1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
- 2. Unless specified, the length of the lead wire is 250mm. Color is either Red, Black or Yellow. For length modification, please contact us.
- 3. This unit cannnot be used in water (IP67 rating, except for terminal).
- 4. Unless circuit is specified, wired (downward) types will apply three wires.
- 5. Please specify circuit (N. O. or N. C.) for wired (side) types. Unless specified, the circuit will apply N. O.
- 6. Please place purchase orders per minimum order unit (integer).
- 7. This products can be used in vehicles. Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.

Inquiries about Products



COPYRIGHT© 2017 ALPS ELECTRIC CO., LTD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Alps Alpine: SPVQ361800