



Detector Switch > SPPB Series > SPPB512300

General-purpose Type SPPB Series

Damp heat

Series Common Info

| Photo | Dimensions | Mounting Hole Dimensions | Circuit Diagram | Packing Specifications | | Soldering Conditions |

PRINT

Part number		SPPB512300	
Operating direction		Vertical	
Poles		1	
Positions		1	
Operation part shape		Push	
Terminal type		For PC board (Dip)	
Operating force		0.35N max.	
Packaging style		Bulk	
Operating temperature range		-40℃ to +85℃	
Rating (max.)/(min.) (Resistive load)		0.1A 30V DC/50µA 3V DC	
Electrical performance	Contact resistance (Initial/After operating life)	1Ω max./ $2Ω$ max.	
	Insulation resistance	100M Ω min. 100V DC	
	Voltage proof	100V AC for 1 minute	
Mechanical performance	Terminal strength	3N for 1 minute	
periormanee	Actuator strength	10N	
Durability	Operating life without load	50,000 cycles 2 Ω max.	
	Operating life with load Rating (max.) (Resistive load)	50,000 cycles 2Ω max.	
Environmental performance	Cold	-40℃ 500h	
	Dry heat	85℃ 500h	
	Dama boat	60°C 00 to 050′ DH 500b	


60°C, 90 to 95%RH 500h

Minimum order unit (pcs.)	Japan	200	
	Export	20,000	
3D CAD (STEP)			0
Certificate of Compliance	ance to RoHS		0


Photo



Dimensions

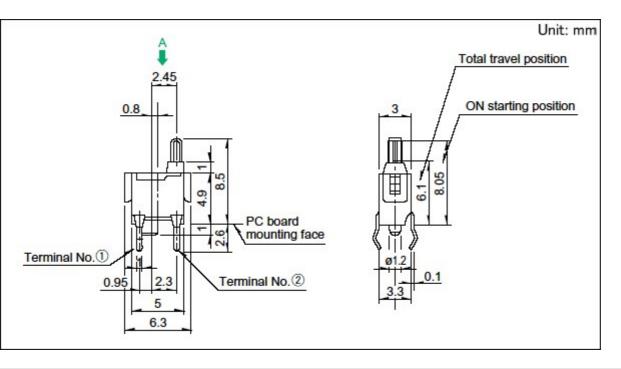


Mounting Hole Dimensions



Viewed from direction A in the dimensions.

Circuit Diagram



Packing Specifications

-			н		
	п	п	1	1/	

Number of packages 1 case / Japan 4,000 (pcs.)

1 case / export 20,000 packing

Export package measurements (mm)

400×270×290

Soldering Conditions

Reference for Dip Soldering

Items	Preheating temperature	100℃max.
	Preheating time	60s max.
Dip soldering	Soldering temperature	255±5℃
	Duration of immersion	5±1s

Reference for Hand Soldering

Soldering temperature	350±5℃
Soldering time	5s max.

Notes are common to this series/models.

- 1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
- 2. Please place purchase orders per minimum order unit (integer).
- 3. This products can be used in vehicles.
 - Although these products are designed to perform over a wide operating temperature range, please

ensure that you receive and read the formal delivery specifications before use.

Inquiries about Products



COPYRIGHT© 2017 ALPS ELECTRIC CO., LTD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Alps Alpine: SPPB512300