

General-purpose Type SPPB Series

| Photo | Dimensions | Land Dimensions | Circuit Diagram | Packing Specifications | Soldering Conditions |

PRINT


Part number			SPPB640201
Operating direction			Horizontal
Poles			1
Positions			1
Operation part shape			Push
Terminal type			For PC board (Reflow)
Operating force			0.35N max.
Packaging style			Taping
Operating temperature range			-40℃ to +85℃
Rating (max.)/(min.) (Resistive load)			0.1A 30V DC/50μA 3V DC
Electrical performance	Contact resistance (Initial/After operating life)	1Ω max./2Ω max.	
	Insulation resistance	100MΩ min. 100V DC	
	Voltage proof	100V AC for 1 minute	
Mechanical performance	Terminal strength	3N for 1 minute	
	Actuator strength	10N	
Durability	Operating life without load	50,000 cycles 2Ω max.	
	Operating life with load Rating (max.) (Resistive load)	50,000 cycles 2Ω max.	
Environmental performance	Cold	-40℃ 500h	
	Dry heat	85℃ 500h	
	Damp heat	60℃, 90 to 95%RH 500h	

Minimum order unit (pcs.)	Japan	1,300
	Export	5,200
3D CAD (STEP) ↓		
Certificate of Compliance to RoHS regulations ↓		


Photo



Dimensions

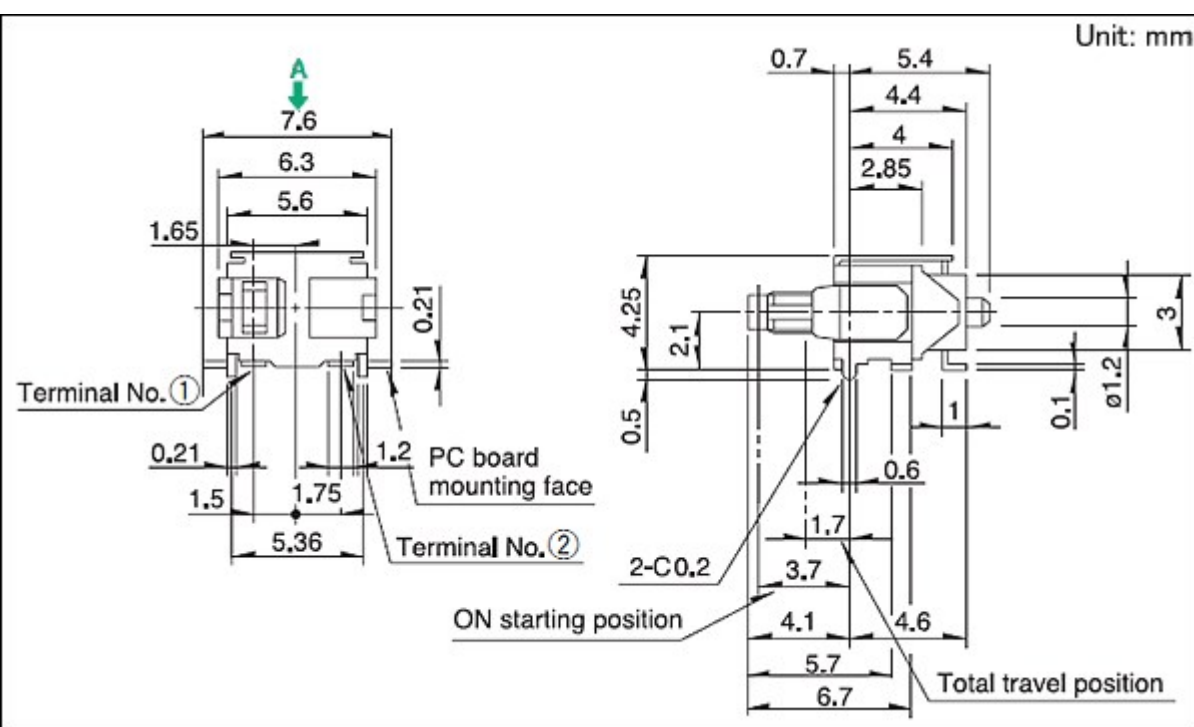


Land Dimensions

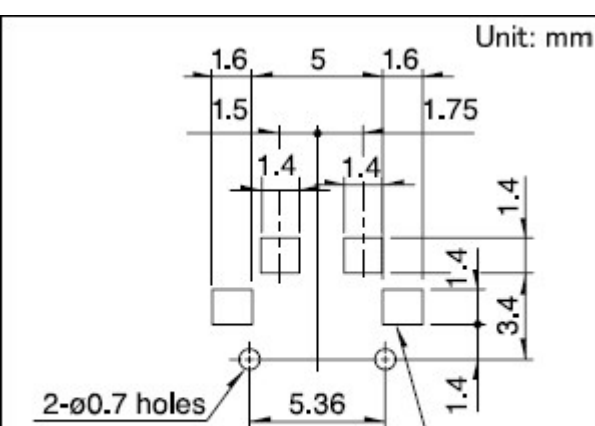


Viewed from direction A in the dimensions.

Circuit Diagram

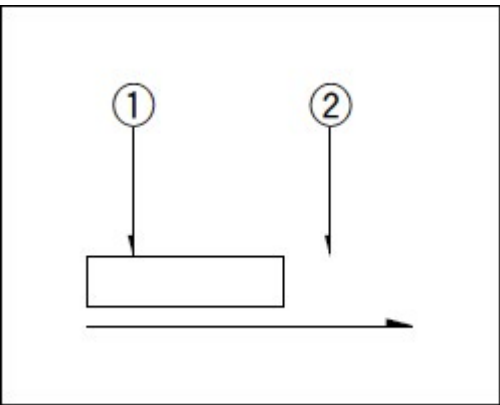

Packing Specifications

Taping

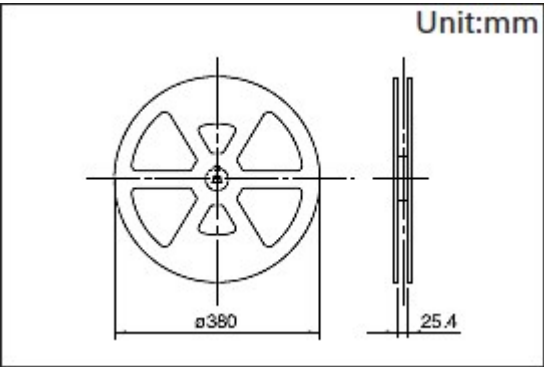


Number of packages (pcs.)	1 reel	1,300
	1 case / Japan	2,600
	1 case / export packing	5,200
Tape width (mm)		24
Export package measurements (mm)		406×406×160

Soldering Conditions

Example of Reflow Soldering Condition

1. Heating method
Double heating method with infrared heater.
2. Temperature measurement
Thermocouple 0.1 to 0.2VCA (K) or CC (T) at soldering portion (copper foil surface) . A heat resisting tape should be used for fixed measurement.
3. Temperature profile

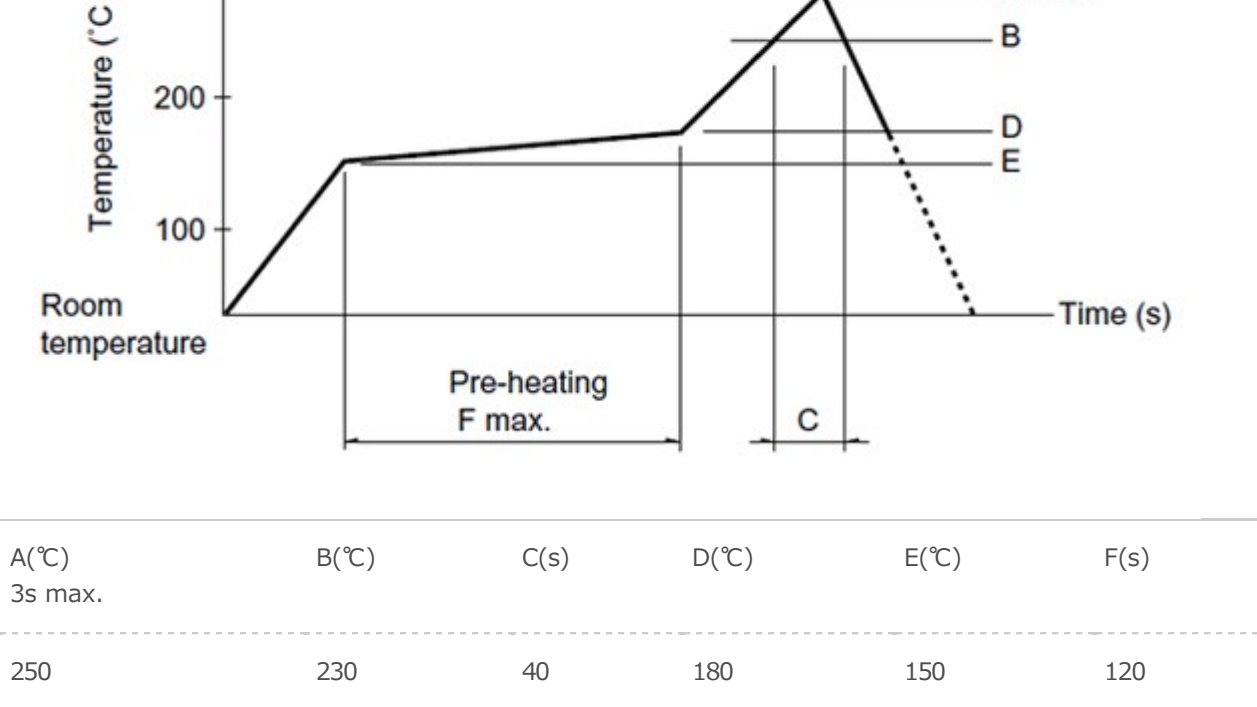

- (1) The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, surface depending on the PC board's material, size, thickness, etc. The above-stated conditions shall also apply to switch surface temperatures.
- (2) Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

Reference for Hand Soldering

Soldering temperature	350±5℃
Soldering time	5s max.

Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders per minimum order unit (integer).
3. This products can be used in vehicles.
Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.

Inquiries about Products

 Inquiry

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Alps Alpine:](#)

[SPPB640201](#)