*ZED 2

Camera Overview & Datasheet

The ZED 2 is a stereo camera that provides high definition 3D video and neural depth perception of the environment. It has been designed for the most challenging applications, from autonomous navigation and mapping to augmented reality and 3D analytics.



*ZED 2 Overview

Spatial Object Detection

Detect and track object with spatial context. By combining AI and 3D the ZED 2 localizes the objects in space and provides the tools to create the next-generation spatial awareness.

Neural Depth Sensing

The ZED 2 is the first stereo camera that uses neural networks to reproduce human vision, bringing stereo perception to a new level.

All-Aluminum Case

The ZED 2 comes with a more robust all-aluminium enclosure with thermal control that compensates focal length and motion sensors biases

Built-in Sensor Stack

The most extensive sensor stack is available on ZED 2. Together with inertial data, the ZED 2 also captures elevation and magnetic field in real-time

Camera Control

The ZED 2 is a UVC video camera with low level access to the device. It provides control over all the camera parameters such as exposure, gain, sharpness, etc.

Cloud Connected

Monitor and control your camera remotely. Using the dedicated cloud platform, capture and analyze spatial data anywhere in the world. Manage your application remotely and update you camera at an time.

Technical Specifications


Campra

Camera	
Output Resolution	2x (2208x1242) @15fps
	2x (1920x1080) @30fps
	2x (1280x720) @60fps
	2x (672x376) @100fps
Field of View	Max. 110°(H) x 70°(V) x 120°(D)
Interface	USB 3.0/2.0
	Integrated 1.2m cable (3.97ft)
Depth Range Max	0.3m to 20m (0.98ft to 65.6ft)
Ideal Range	5m to 12m(16.4ft to 39.4ft)
Depth Accuracy	< 0.8% at 2m (6.6ft)
	< 4% at 12m (39.4ft)

Sensors

Motion	Gyroscope, Accelerometer, Magnetometer
Environmental	Barometer, Temperature
Physical	
Dimensions	174.9 x 29.8 x 31.9mm (6.89 x 1.18 x 1.25")
Weight	164g (0.36 lb.)
Op. Temp.	-10 °C to +45°C (14°F to 113°F)
Power	380 mA / 5V USB Powered

Functional SDK Diagram

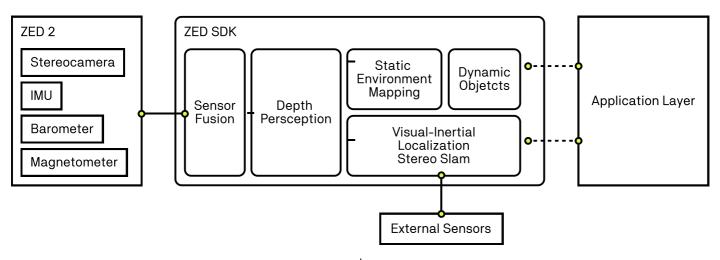

*ZED 2 Sensors Specifications

Dual Image Sensors

_					
Se	n	S	റ	r	S

⅓" 4MP CMOS
2688 x 1520 pixels
2μm x 2μm
Electronic synchronized rolling shutter
2x (2208x1242) @15fps cropping mode 2x (1920x1080) @15/30fps cropping mode 2x (1280x720) @15/30/60fps binning 2x2 mode 2x (662x376) @15/30/60/100fps binning 4x4 mode
YUV 4:2:2 - UYVY (8 bits)
38.3 dB
64.6 dB
1900 mV/Lux-sec
120mm (4.7")
2.12mm (0.08")
Max. 110° (H) x 70° (V) x 120° (D)
f/2
<4.8%

System Requirements

Supported OS	Win 10, Win 11 Ubuntu 20 & 22 Debian, CentOS (via Docker)
	Jetson L4T Dual-core ≥ 2.4GHz processor Minimum 4GB RAM
GPU	NVIDIA GPU ≥ 2GB Memory NVIDIA Compute capability ≥ 3.0
Compatible with	NVIDIA Jetson Xavier/Orin

Motion / Environmental Sensors

Accelerometer Range	+/- 8G
Accelerometer Resolution	0.244 mg
Accelerometer Noise Density	3.2 mg
Gyroscope Range	+/- 1000 dps
Gyroscope Resolution	0.03 dps
Gyroscope Noise Density	0.16 dps
Sensitivity Error	+/- 0.4%
Output Data Rate	400 Hz

Magnetometer

Magnetic Field Range	+/- 2500 μT (z) +/- 1300 μT (x,y)	
Magnetic Field Resolution	0.3 μΤ	
Output Data Rate	10 Hz	

Barometer


Pressure Range	300 to 1100 hPa
Pressure Resolution	0.18 Pa
Relative Pressure Accuracy	0.12 hPa
RMS Noise	0.2 Pa
Output Data Rate	25 Hz


Temperature Sensors


Temperature Range	-40 to 125°C (-40 to 257°F)
Abs. Temperature Accuracy	+/- 0.5°C
Output Data Rate	25 Hz


StereoLabs* stereolabs.com

*ZED 2 Technical Drawings



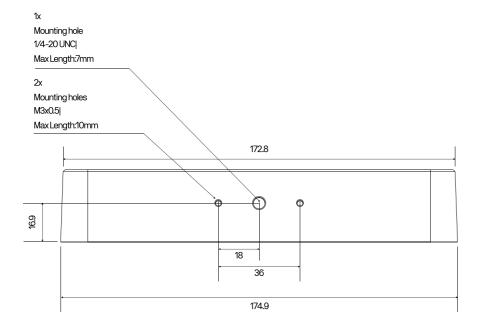



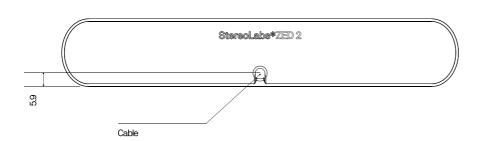


StereoLabs*

stereolabs.com

*ZED 2 Technical Drawings

Sensors Diagram

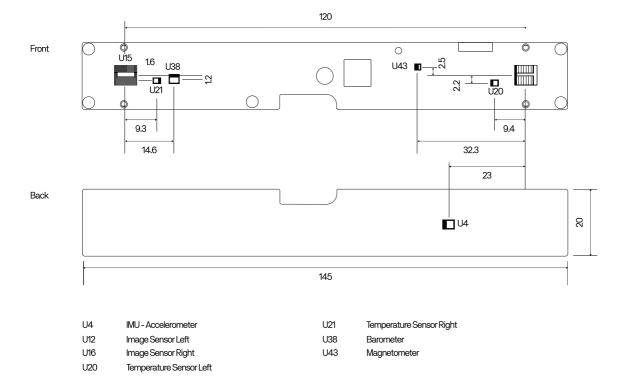

*ZED 2 Part Number

ZED 2 Part Number

Cable	ZED 2
None	ZED-211000

stereolabs.com

StereoLabs*

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

StereoLabs:

ZED 2