

# ED-Pi5PCOOLER

## Passive Cooler for Raspberry Pi 5

- ◆ Sheet metal + CNC cutting process, easy to install
- ◆ Pre-installed with thermal conductive silicone
- ◆ Excellent cooling performance can effectively reduce the CPU temperature of Raspberry Pi 5
- ◆ All interfaces of Raspberry Pi 5 are accessible




### Specifications

Cooling Performance		
Test Device Configuration	Raspberry Pi 5	Raspberry Pi 5 + ED-Pi5PCOOLER
Software Configuration	CPU 4 cores running at full load via sysbench	
Ambient Temperature	25°C	
Stable running temperature of CPU(°C)	84.5	69.6
<b>Test Results:</b> Under the environment of 25°C, when the device is running in a stable state, ED-Pi5PCOOLER can reduce the temperature of Raspberry Pi 5 by about 15°C, allowing the Raspberry Pi 5 CPU to run continuously at its maximum mains frequency (2400MHZ).		

Mechanical Characteristics	
Dimensions	65mm x 58mm x 9.3mm
Material	Sheet Metal
Colour	Black
Weight	About 40g

### Dimensions

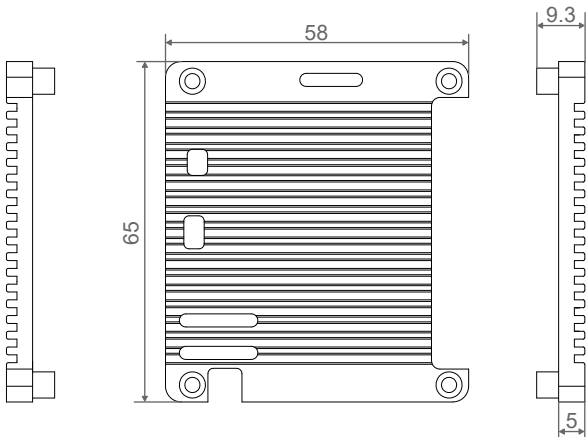

Unit: mm

## Ordering Code

P/N: **ED-Pi5PCOOLER**

Configuration: Passive Cooler for Raspberry Pi 5

## Packing List

- 1 x ED-Pi5PCOOLER
- 1 x Accessory Kit (With 4 x M2.5\*12 Screws and 4 x M2.5 Nuts)

## Installation


### Parts list:

NO.	Name	Quantity (PCS)
1	ED-Pi5PCOOLER	1
2	Raspberry Pi 5 (Not provided)	1
3	M2.5*12 Screw	4
4	M2.5 Nut	4

### Note:

- Raspberry Pi 5 is not included in the box, the following is intended as an installation illustration only.
- Before you start installing, please remove the White Protective Paper from thermal silicone in ED-Pi5PCOOLER.
- Before you start installing, please check whether the tops of 4 Nylon Posts in ED-Pi5PCOOLER are on the same level. If there are some tops that are higher than others, please press the higher tops into the mounting holes.

### Steps:

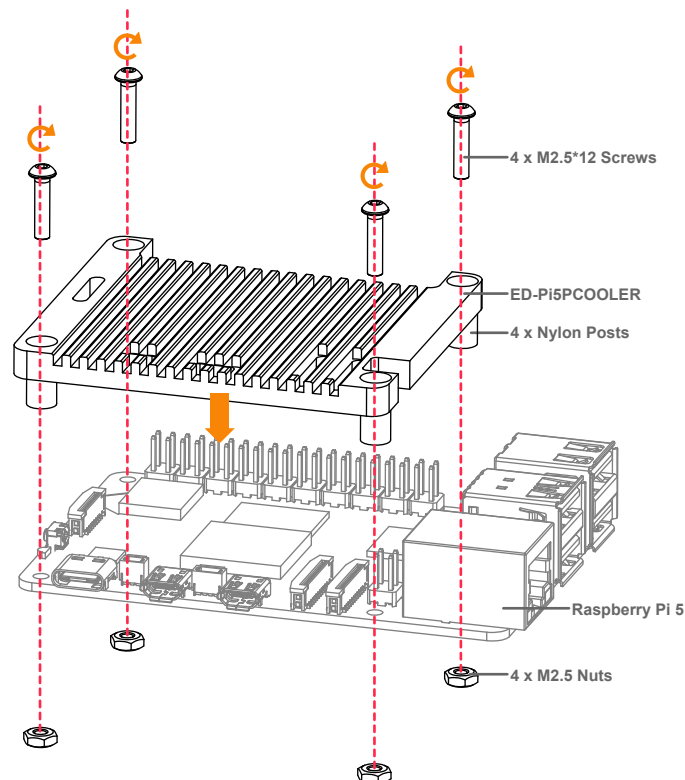

- ① Place the **ED-Pi5PCOOLER** on the **Raspberry Pi 5** so that the 4 Nylon Post holes align with the 4 mounting holes on the **Raspberry Pi 5**.
- ② Place 4 M2.5 nuts under the 4 mounting holes of the **Raspberry Pi 5**, then insert 4 M2.5\*12 screws into the 4 screw hole positions of the **ED-Pi5PCOOLER**, and use a screwdriver to tighten them clockwise to secure the **ED-Pi5PCOOLER** to the **Raspberry Pi 5**.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EDATEC:](#)

[ED-Pi5PCOOLER](#) [ED-Pi5PCOOLER](#)