

Model 73017
MCX PLUG R/A SEMI-RIGID, RG405



Model 73017 MCX PLUG R/A SEMI-RIGID, RG405

Snap-on coupling and miniature size for fast connect and disconnect where space is limited.

Features

- DC - 3 GHz bandwidth.
- 30% smaller than SMB connectors.
- Meets CECC 22220.
- Perfect for applications where space, weight, performance and ease of assembly are required.
- Precision machined and gold-plated for low loss.


Materials

- Body is machined brass with gold plating.
- Center contacts – Plug is gold plated brass and Jack is gold plated beryllium copper.
- High quality PTFE insulators.
- Crimp Ferrules are gold or nickel plated copper.

Ordering Information

Model: 73017
Description: MCX PLUG R/A SEMI-RIGID, RG405

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

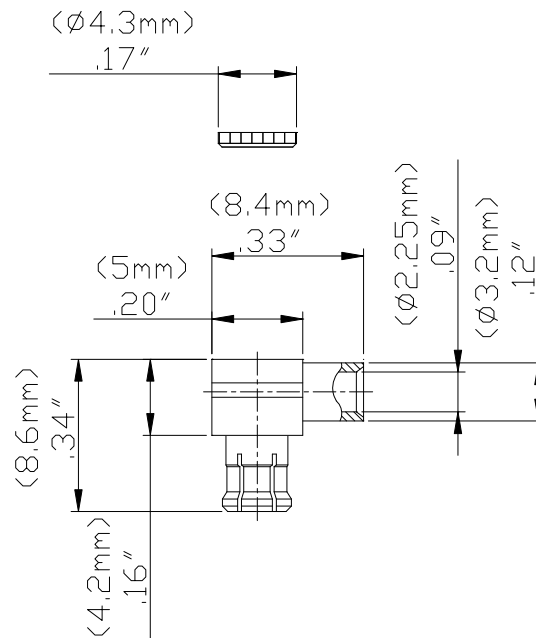

Specifications


| | |
|-----------------------------------|------------------------------------|
| Impedance | 50 Ω |
| Frequency Range | DC - 3 GHz |
| VSWR | 1.4 max. |
| Working Voltage | 170 Vrms max. |
| Dielectric withstand voltage | 750 Vrms |
| Center / Outer contact resistance | 5 / 2.5 m Ω |
| Number of insertions | 500 cycles min. |
| Insulation resistance | 1,000 M Ω min. |
| Temperature Range | -55° C to 155° C, -67° F to 311° F |

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02''$ (.51 mm), .xxx = $\pm .005''$ (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.
D2003453 REV 001


Model 73017
MCX PLUG R/A SEMI-RIGID, RG405

Cable Assembly Instructions

1. CUT CABLE END EVENLY AND PERPENDICULAR




2. STRIP CABLE JACKET, BRAID, AND DIELECTRIC TO SPECIFICATION LENGTHS.

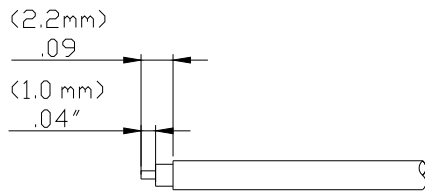


RECOMMENDED STRIP LENGTHS


3. SLIDE CONNECTOR BODY OVER CENTER CONDUCTOR, DIELECTRIC AND CABLE JACKET.

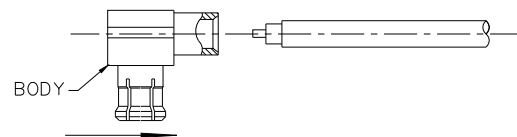

4. SOLDER CABLE CENTER CONDUCTOR TO CENTER CONTACT.

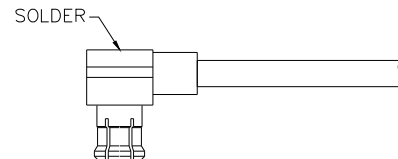

5. SCREW ON CAP AS SHOWN.

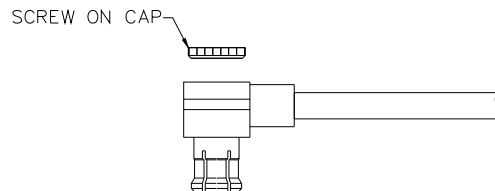

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pomona:](#)

[73017](#)