

7.00

PCB Terminal Block


7.00 mm Pin Spacing

- Board Mount PCB
- 12A Current Rating
- Height 8.5mm
- Stackable, no dovetails



MV13xx-7,00-V-L

Front Wire Entry



Electrical Ratings				IEC	VDE N.40019705
Usergroup	B	C	D	-	
Rated Voltage	300V	-	300V	450V	
Rated Current	12A	-	12A	13.5A	
Wire Size	<i>solid</i>	30-16 AWG	-	30-16 AWG	0.25mm ² - 1.5mm ²
	<i>stranded</i>	30-16 AWG	-	30-16 AWG	0.25mm ² - 1.0mm ²


Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Stackable
2	10.5	200	MV132-7,00-V-L
3	17.5	200	MV133-7,00-V-L
4	24.5	200	MV134-7,00-V-L
5	31.5	200	MV135-7,00-V-L
6	38.5	200	MV136-7,00-V-L
7	45.5	200	MV137-7,00-V-L
8	52.5	200	MV138-7,00-V-L
9	59.5	200	MV139-7,00-V-L
10	66.5	200	MV1310-7,00-V-L
11	73.5	200	MV1311-7,00-V-L
12	80.5	200	MV1312-7,00-V-L


Material Specifications	
Clamp	Nickel Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data	
Screw Size	M2
Torque	0.2Nm (1.8 lb.in.)
Stripping Length	max. 6mm
Clamp Opening	1.8 x 1.8mm
PCB Hole Size	1.3mm

Dimensions (mm)

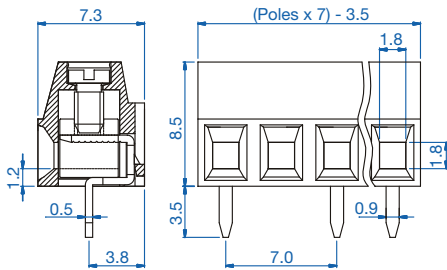

Drilling Diagram

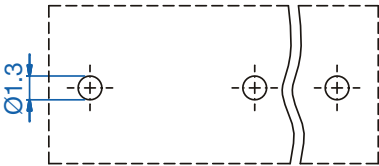

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Altech:](#)

[MV132-7,00-V-L](#) [MV134-7,00-V-L](#) [MV133-7,00-V-L](#) [MV136-7,00-V-L](#) [MV135-7,00-V-L](#) [MV131-7,00-V-L](#)