


Safety Relay

OA 5621 / OA 5621S

Features


- 4 output contacts
- International approvals:
TÜV, UL, cUL
- Quality control check for each safety relay
- Forced-guided contacts, all gold flash plated
- Contact Gap > 0.5 mm throughout life of relay
- Various contact materials,
mixed contact material optional
- High coil voltage range
- High breakdown voltage: contact/coil ≥ 4 KV
contact/contact ≥ 4 KV
- High creeping distance: contact/coil ≥ 5.5 mm
contact/contact ≥ 5.5 mm
- Protection Rating IP 67, washable
- Custom design available,
- coil voltage - coil resistance,
- contact pressure - operate/release time
- gold plated double contacts
- S-Type
higher external clearance and creeping distance:
contact/contact ≥ 7.5 mm

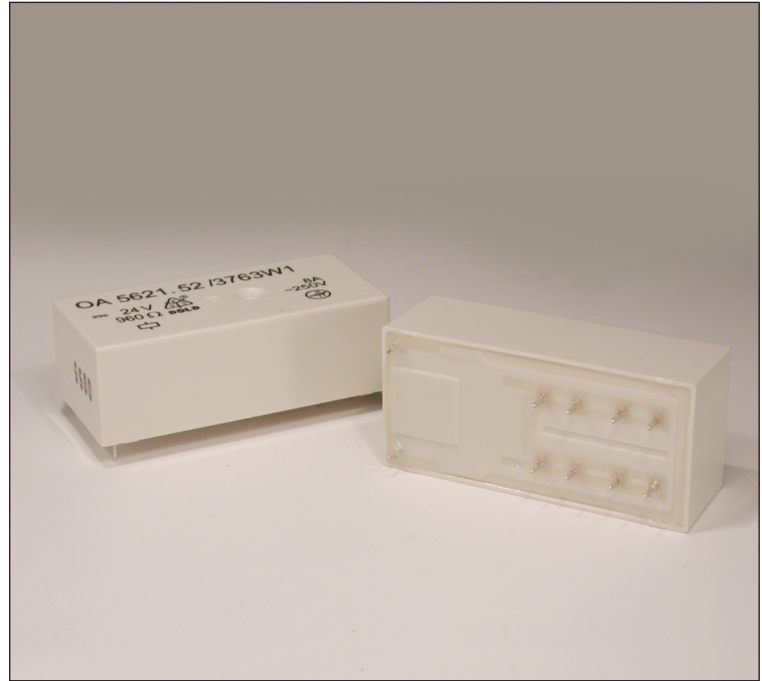


Technical Data

- **Nominal Coil Voltage** 6, 12, 24, 48, 60, 110, DC
- **Coil Power Dissipation** 0.6 W
- **Max. Switching Voltage** 250V DC, 400V AC
- **Max. Switching Current** 8 A (3 x 8A simultaneous)
- **Max. Switching Power — DC** 200W
- **Max. Switching Power — AC** 2000VA
- **Contact Switching Rate** 10 operations per second
- **Relay Operate Time** 12 ms
- **Relay Release Time** 8 ms
- **Operation Vibration** 0.35 mm Ampl. max
..... @ 10...200Hz, 5g max
- **Contact Arrangements** 3NO/1NC, 2NO/2NC
- **Contact Material** AgNi10+0.2 μ mAu Standard
..... AgSnO₂+0.2 μ mAu, AgNi10+5 μ mAu Optional
- **Mechanical Life** >20x10⁶ operation cycles
- **Electrical Life** AgSnO₂ >1.5x10⁵, AgNi10 >1.0x10⁵
..... operation cycles @ 230V AC, 8A, cos φ =1
- **Ambient Temperature** -40...+80°C
- **Cover Material** Polyamide 6
- **Weight** 35 g
- More detailed data upon request


Diagrams




Relay operation voltage vs. ambient temperature



Limitation factor for inductive loads

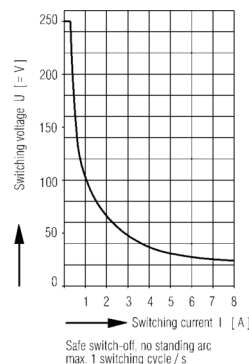

Maximum switching power curve

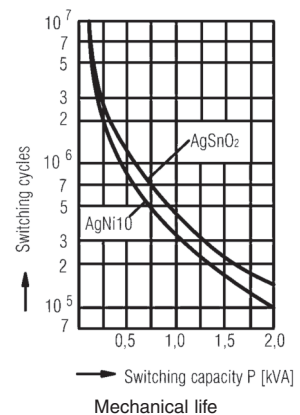

Mechanical life

Safety Relay OA 5621 / OA 5621S Data





Relay Data			Ordering Information			
Rated Voltage	Voltage Range	Coil Resistance (10%)	3 NO/1 NC Type	2 NO/2 NC Type	3 NO/1 NC S-Type	2 NO/2 NC S-Type
6V	4.5 - 8.4V	60 Ω	56.OA21.0631□	56.OA21.0622□	56.OA21S.0631□	56.OA21S.0622□
12V	9.0 - 16.8V	240 Ω	56.OA21.1231□	56.OA21.1222□	56.OA21S.1231□	56.OA21S.1222□
24V	18.0 - 33.6V	960 Ω	56.OA21.2431□	56.OA21.2422□	56.OA21S.2431□	56.OA21S.2422□
48V	36.0 - 67.2V	3840 Ω	56.OA21.4831□	56.OA21.4822□	56.OA21S.4831□	56.OA21S.4822□
60V	45.0 - 84.0V	6000 Ω	56.OA21.6031□	56.OA21.6022□	56.OA21S.6031□	56.OA21S.6022□
110V	82.5 - 154.0V	20000 Ω	56.OA21.1131□	56.OA21.1122□	56.OA21S.1131□	56.OA21S.1122□

Contact Material, Example: □ AgSnO₂+2 μ mAu

□ AgNi10+.2 μ mAu



□ AgNi10+5 μ mAu

Footprints (solder side)

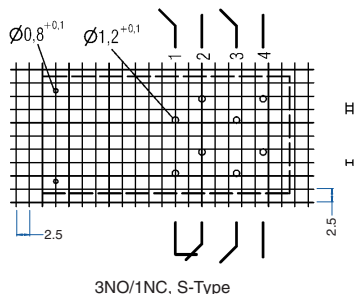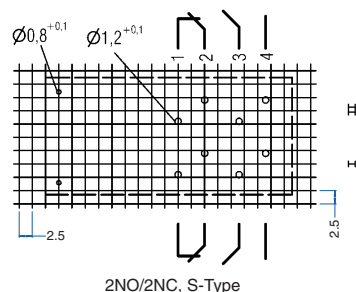

Dimensions

S-Type

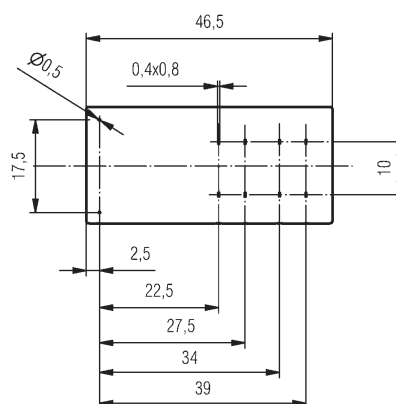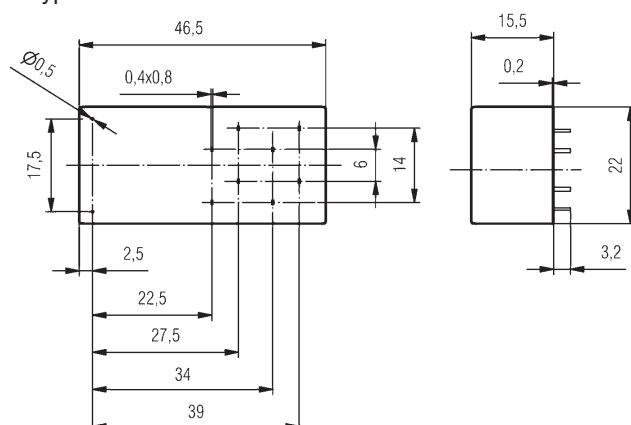

Note: All dimensions are shown in millimeters. To convert to inches, divide by 25.4.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Altech:](#)

[56.OA21.2422C](#) [56.OA21.2431N](#) [56.OA21.2422N](#) [56.OA21.2431C](#) [56.OA21S.1222S](#)