

ISO 9001
OMI-SAL Global

The image displays a variety of Reipol industrial relays and modules. Key components shown include:

- Power Relays:** Models like PI6W-1PS-12/24VDC and PI6W-1PS-230VAC/DC are shown with their internal contact mechanisms and terminal blocks. Dimensions such as 27-0,2, 27, 37, 2,6, 24,2, 20,23, 35, and 75-0,2 are indicated.
- Signal Relays:** Models like PI6W-1PS-230VAC/DC and PI6W-1PS-230VAC/DC are shown with their internal contact mechanisms and terminal blocks. Dimensions such as 27-0,2, 27, 37, 2,6, 24,2, 20,23, 35, and 75-0,2 are indicated.
- Terminal Blocks:** Various terminal blocks are shown, including those with screw terminals and push-in terminals. Dimensions such as 27-0,2, 27, 37, 2,6, 24,2, 20,23, 35, and 75-0,2 are indicated.
- Technical Specifications:** Various technical specifications are provided, including voltage ratings (e.g., 12V, 24V, 230V), current ratings (e.g., 12A, 16A, 25A), and power ratings (e.g., 100W, 150W, 250W).


The background is a dark blue gradient with white technical drawings and dimensions, emphasizing the precision and reliability of the products.

Industrial Relays

Altech Corp.®

Since 1984, Altech Corporation has grown to become a leading supplier of automation and industrial control components. Headquartered in Flemington, NJ, Altech has an experienced staff of engineering, manufacturing and sales personnel to provide the highest quality products with superior service. This is the Altech Commitment!

With experienced Product Engineers and Customer Service personnel, Altech provides solutions to your most pressing application challenges. All with one thought in mind - *to ensure that we solve your problem the first time!*

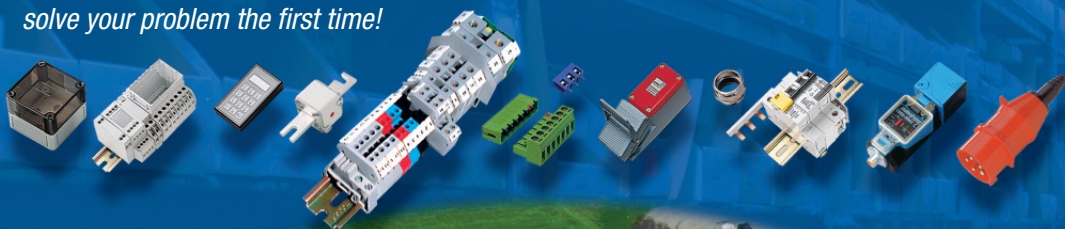

Altech's Commitment

Altech's Automation and Control components meet applicable national and international standards, such as UL, NEC, CSA, IEC and VDE. Altech provides these products with superior customer service and delivery through a ISO 9001 Quality Management system, which stresses continuous process improvement. We perform these services with honesty and integrity. All Altech employees are trained in this Quality Management System and are dedicated to achieve these goals. Altech's quality system has been ISO approved since 1999.



Type of Relay		R2	R3	R4
- Single-phase motor applications - Type of insulation: basic - Type of clearance: micro-disconnection				
Contact data				
Number and type of contacts		2CO	3CO	4CO
Rated / max. switching voltage	AC	250V / 440V	250V / 440V	250V / 250V
Rated load (capacity)	AC1	12A / 250V AC	10A / 250V AC	6A / 250V AC
	AC15	3A / 120V (B300)	3A / 120V (B300)	1.5A / 120V (C300)
	AC15	1.5A / 240V (B300)	1.5A / 240V (B300)	0.75A / 240V (C300)
	AC3	370W	370W	125W
	DC1	12A / 24V DC	10A / 24V DC	6A / 24V DC
	DC13	0.22A / 120V (R300)	0.22A / 120V (R300)	0.22A / 120V (R300)
	DC13	0.1A / 250V (R300)	0.1A / 250V (R300)	0.1A / 250V (R300)
Coil data				
Rated voltage	AC	6...240V 50/60Hz	6...240V 50/60Hz	6...240V 50/60Hz
	DC	5...220V	5...220V	5...220V
Insulation (PN-EN 60664-1)				
Insulation rated voltage		250V AC	250V AC	250V AC
Dielectric strength				
•between coil and contacts		2500V AC	2500V AC	2500V AC
•contact clearance		1500V AC	1500V AC	1500V AC
General data				
Dimensions (LxWxH)mm		27.5 x 21.2 x 35.6	27.5 x 21.2 x 35.6	27.5 x 21.2 x 35.6
Examples of ordering code	AC coil	R2-2012-23-5230-WT	R3-2013-23-5230-WT	R4-2014-23-5230-WT
	DC coil	R2-2012-23-1024-WT	R3-2013-23-1024-WT	R4-2014-23-1024-WT
Plug-in sockets for relays		GZT2, GZM2	GZT3, GZM3	GZT4, GZM4


Plug-in sockets for relays

For additional accessories please see page 10.

					
GZT2	GZM2	GZT3	GZM3	GZT4	GZM4
For R2	For R2	For R3	For R3	For R4	For R4

Industrial Relays

altechcorp.com/HTML/IndustrialRelays.html

Type of Relay		RY2	R2M	RUC
• Single-phase motor applications • Type of insulation: basic • Type of clearance: micro-disconnection				
Contact data				
Number and type of contacts		2 CO	2 CO	2CO, 3CO, 2NO
Rated / max. switching voltage	AC	250V / 440V	250V / 250V	400V / 440V
Rated load (capacity)	AC1	12A / 250V AC	5A / 250V AC	16A / 250V AC
	AC15			
	AC15			
	AC3			
	DC1	12A / 30V DC	5A / 24V DC	16A / 24V DC
	DC13			
	DC13			
Coil data				
Rated voltage	AC DC	6...240V 50/60Hz 5...220V	6...240V 50/60Hz 6...110V	6...240V 50/60Hz 6...220V
Insulation (PN-EN 60664-1)				
Insulation rated voltage		250V AC	250V AC	400V AC
Dielectric strength				
•between coil and contacts		2500V AC	2000V AC	2500 V AC
•contact clearance		1000V AC	1000V AC	1500, 2500 V AC
General data				
Dimensions (LxWxH)mm		27.5 x 21.1 x 34.5	27.5 x 14 x 32.9	36.1 x 38.6 x 45.5
Examples of ordering code	AC coil DC coil	RY2-2012-26-5230 RY2-2012-26-1024	R2M-2012-23-5230 R2M-2012-23-1024	RUC-2012-26-5230 RUC-2013-26-1024
Plug-in sockets for relays		GZY2	GZ2	GUC11

Plug-in sockets for relays

For additional accessories please see page 10.



GZY2

For RY2



GZ2

For R2M



GUC11

For RUC

Type of Relay		R15 (2CO)	R15 (3CO)	R15 (4CO)
• Single-phase motor applications • Type of insulation: basic • Type of clearance: micro-disconnection				
Contact data				
Number and type of contacts		2CO	3CO	4CO
Rated / max. switching voltage	AC	250V / 440V	250V / 440V	250V / 250V
Rated load (capacity)	AC1	10A / 250V AC	10A / 250V AC	10A / 250V AC
	AC15	3A / 120V (B300)	3A / 120V (B300)	3A / 120V (B300)
	AC15	1.5A / 240V (B300)	1.5A / 240V (B300)	1.5A / 240V (B300)
	AC3	370W	370W	370W
	DC1	10A / 24V DC	10A / 24V DC	10A / 24V DC
	DC13	0.22A / 120V (R300)	0.22A / 120V (R300)	0.22A / 120V (R300)
	DC13	0.1A / 250V (R300)	0.1A / 250V (R300)	0.1A / 250V (R300)
Coil data				
Rated voltage	AC	6...240V 50/60Hz	6...240V 50/60Hz	6...240V 50Hz.60Hz
	DC	6...220V	6...220V	6...220V
Insulation (PN-EN 60664-1)				
Insulation rated voltage		250V AC	250V AC	250V AC
Dielectric strength	•between coil and contacts	2500V AC	2500V AC	2500V AC
	•contact clearance	1500V AC	1500V AC	1500V AC
General data				
Dimensions (LxWxH)mm		35 x 35 x 54.4	35 x 35 x 54.4	35 x 42.5 x 54.5
Examples of ordering code	AC coil	R15-2012-23-5230-WT	R15-2013-23-5230-WT	R15-1014-23-3230
	DC coil	R15-2012-23-1024-WT	R15-2013-23-1024-WT	R15-1014-23-1024
Plug-in sockets for relays		PZ8, GZU8, GZP8	PS11, PZ11	GZ14U

Plug-in sockets for relays

For additional accessories please see page 10.

						
PZ8	GZU8	GZP8	PS11	PZ11	GZP11	GZ14U
For R15 2 CO	For R15 2 CO	For R15 2 CO	For R15 3 CO	For R15 3 CO	For R15 3 CO	For R15 4 CO

Industrial Relays


altechcorp.com/HTML/IndustrialRelays.html

Type of Relay		RS35, RS50	RM699B	RSR30
• Solar system control • PLC control • Type of insulation: basic • Type of clearance: micro-disconnection				
Contact Data				
Number and type of contacts		2NO	1CO	SSR
Applications		Solar Power	PLC Control	PLC Control
Rated/max. switching voltage	AC	250V / 440V	250V / 400V	240V
Rated load (capacity)	AC1	35A, 48A / 250V AC	6A / 250V AC	2A / 240V AC
	DC1	35A, 48A / 24V DC	6A / 24V DC	2.5A / 48V DC 4A / 24V DC 1A / 100V DC
Coil Data				
Rated voltage	AC	NA	NA	NA
	DC	5...110V	5...60V	see data sheet*
Insulation (PN-EN 60664-1)				
Insulation rated voltage		250V AC	250V AC	240V AC
Dielectric strength				
•between coil and contacts		5000V AC	4000V AC	SSR
•contact clearance		2500V AC	1000V AC	SSR
General Data				
Dimensions (LxWxH)mm		40 x 25 x 49.2	28 x 5 x 15	28 x 5 x 15
Examples of ordering code	AC coil DC coil	RS50-3022-25-1110	RM699BV-3011-85-1012	RSR30-D24-D1-D2-040-1 RSR30-D24-A1-24-020-1
Plug-in sockets for relays		PCB Only	PI6W-1P	PIR6W-1PS PIR6W-1PS

Plug-in sockets for relays

For additional accessories please see page 10.

[*altechcorp.com/HTML/IndustrialRelays.html](http://altechcorp.com/HTML/IndustrialRelays.html)



PCB not supplied

PI6W-1P

For RM699BV, RSR30

PI6W-1P

For RM699BV, RSR30

Type of Relay	RM84	RM85	RM87
Single-phase motor applications Type of insulation: reinforced Type of clearance: micro-disconnection Type of clearance: full-disconnection			
Contact data			
Number and type of contacts	2CO, 2NO	1CO, 1NO	1CO, 1NO
Rated/max. switching voltage AC	250V / 440V	250V / 440V	250V / 440V
Rated load (capacity) AC1	8A/250V AC 3A / 120V (B300) 1.5A / 240V (B300)	16A / 250V AC 3A / 120V (B300) 1.5A / 240V (B300)	12A / 250V AC 3A / 120V (B300) 1.5A / 240V (B300)
AC15	550W	750W	750W
AC15	8A / 24V DC	16A / 24V DC	12A / 24V DC
AC3	0.22A / 120V (R300)	0.22A / 120V (R300)	0.22A / 120V (R300)
DC1	0.1A / 250V (R300)	0.1A / 250V (R300)	0.1A / 250V (R300)
DC13			
DC13			
Coil data			
Rated voltage AC	12...240V 50/60Hz	12...240V 50/60Hz	12...240V 50/60Hz
DC	3...110V	3...110V	3...110V
Insulation (PN-EN60664-1)			
Insulation rated voltage	400V AC	400V AC	400V AC
Dielectric strength •between coil and contacts •contact clearance	5000V AC 1000, 2000V AC	5000V AC 1000, 2000V AC	5000V AC 1000, 2000V AC
General data			
Dimensions (LxWxH)mm	29 x 12.7 x 15.7	29 x 12.7 x 15.7	29 x 12.7 x 15.7
Examples of ordering code AC coil	RM84-2012-25-5230	RM85-2011-25-5230	RM87N-2011-25-5230
DC coil	RM84-2022-35-1012	RM85-2021-35-1012	RM87L-2021-35-1012
Plug-in sockets for relays	GZT80, GZM80, GD50	GZT80, GZM80, GD50	GZT92, GZM92, GD35

Plug-in sockets for relays

For additional accessories please see page 10.

					
GZT80	GZM80	GD50	GZT92	GZM92	GD35
For RM84, RM85	For RM84, RM85	For RM84, RM85	For RM87	For RM87	For RM87

Industrial Interface Relays

altechcorp.com/HTML/IndustrialRelays.html

Type of Relay	PI6-1P	PI6-1T	PI6-OC
Type of insulation: basic Type of insulation: reinforced Type of clearance: micro-disconnection Output = contacts (R) Solid state relays	electromechanical	triac	transistor
			
Output circuit-contact data			
Number and type of contacts/outputs	1CO	1NO	1NO
Rated/max. switching voltage AC	250V / 400V	400V / 440 V	DC: 70V / 70V
Rated load AC1	6A / 250V AC 6A / 24V DC	1.2A / 400V AC	0.5A / 70V DC
DC1			
Input control circuit			
Rated voltage AC:50/60Hz AC/DC	24...230V 12...36V	24...230V 5...32V	24...230V 5...32V
DC			
Insulation (PN-EN 60664-1)			
Insulation rated voltage	400V AC	600V AC	600V AC
Dielectric strength			
•input-output	4000V AC	4000V AC	3000V AC
•input-output			
•contact clearance	1000V AC		
General data			
Dimensions (LxWxH)mm	93.8 x 6.2 x 80	93.8 x 6.2 x 80	93.8 x 6.2 x 80
Examples of ordering code	PI6-1P-230V AC/DC	PI6-1T-230V AC/DC	PI6-OC-230V AC/DC
AC/DC coil			
AC coil	PI6-1P-24V DC	PI6-1T-5...32V DC	PI6-OC-5...32V DC
DC coil			
Operational relays	RM699BV	RSR30	RSR30
Plug-in sockets	—	—	—
LED indicator	LED green	LED green	LED green

For accessories please see page 10.



RM699B



RSR30

**Relays are built-in.
Relays are not replaceable.
See page 6.**

altechcorp.com/HTML/IndustrialRelays.html

Type of Relay		PIR6W-1P	PIR6W-1PS	PIR6WB-1PS
Type of insulation: basic Type of insulation: reinforced Type of clearance: micro-disconnection Output = contacts (R) Solid state relays		electromechanical	electromechanical, triac, transistor	electromechanical, triac, transistor
				
Output circuit - contact data				
Number and type of contacts / outputs		1CO	1CO, 1NO	1CO, 1NO
Rated/max. switching voltage AC		250V / 400V	250V / 400V	250V / 400 V
Rated load AC1 DC1		6A / 250V AC 6A / 24V DC	6A / 250V AC 6A / 24V DC	6A / 250V AC 6A / 24V DC
Input control circuit				
Rated voltage AC:50/60Hz AC/DC DC		24...230V 12...36V	24...230V 6...60V	24...230V 6...60V
Insulation (PN-EN 60664-1)				
Insulation rated voltage		250V AC	250V AC	250V AC
Dielectric strength				
•input-output		4000V AC	4000V AC	4000V AC
•input-output				
•contact clearance		1000V AC	1000V AC	1000V AC
General data				
Dimensions (LxWxH)mm		98.5 x 6.2 x 85.5	98.5 x 6.2 x 85.5	98.3 x 6.2 x 84.6
Examples of ordering code AC/DC coil AC coil DC coil		PIR6W-1P-24V AC/DC PIR6W-1P-24V DC	PIR6W-1PS-24V AC/DC-R PIR6W-1PS-24V DC-R	PIR6WB-1PS-24V AC/DC-R PIR6WB-1PS-24V DC-R
Operational relays Plug-in sockets LED indicator		RM699BV PI6W-1P-... LED green	RM699BV, RSR30 PI6W-1PS-... LED green	RM699BV, RSR30 PI6WB-1PS-... LED green

For accessories please see page 10.




Relays are replaceable.
Extra relays sold separately.
See page 6.

Accessories for Industrial Relays

Signalling / protecting module
type M...

Electromagnetic
relay



Removing the relay from the socket
with a retractor / retractor clip.

Retainer / retractor clip

Screw terminals
plug-in socket

Description plate

Type of plug-in socket	GZT80, GZT92 GZM80, GZM92	GZT2, GZT3, GZT4 GZM2, GZM3, GZM4
Retainer / retractor clips		
Type	GZT80-0040	GZT4-0040
Color	gray	gray
Description plates		
Type	GZT80-0035	GZT4-0035
color	white	white
For relays	RM84, RM85, RM87	R2, R3, R4
Height of relay	15...16.5 mm	35.6 mm

Accessories for Industrial Relays

For sockets type: GZT80, GZT92, GZM80, GZM92, GZS80, GZS92, ES 32
GZT2, GZT3, GZT4, GZM2, GZM3, GZM4

Modules type M... are parallel connected with relay coil.
Polarity P: -A1/+A2. Polarity N: +A1/-A2.



Modules type M...	Layout	Layout	Type of module
Module D (polarization P) It limits overvoltage on DC coils.		6/230 V DC	M21P
Module D (polarization N) It limits overvoltage on DC coils.		6/230V DC	M21N
Module LD (polarization P) It limits overvoltage on DC coils. Coil energizing indication.		6/24 V DC 24/60 V DC 110/230V DC	M31R, M31G* M32R, M32G M33R, M33G
Module LD (polarization N) It limits overvoltage on DC coils. Coil energizing indication.		6/24 V DC 24/60V DC 110/230V DC	M41R, M41G M42R, M42G M43R, M43G
Module RC It protects against EMC disturbance. It limits overvoltage.		6/24V AC 24/60V AC 110/240V AC	M51 M52 M53
Module L Coil energizing indication.		6/24V AC/DC 24/60V AC/DC 110/230V AC/DC	M61R, M61G* M62R, M62G M63R, M63G*
Module LV It limits overvoltage on AC and DC coils. Coil energizing indication.		6/24V AC/DC 24/60V AC/DC 110/230V AC/DC	M91R, M91G M92R, M92G M93R, M93G
Module V It limits overvoltage on AC and DC coils. No indication.		24V AC 130V AC 230V AC	M71 M72 M73
Module R It limits overvoltage on AC coils.		110/230V AC	M103

M...R - LED red, M...G - LED green

* In stock.



WEB TOOLS

Product Crossings
Request for Quote
Sample Request
Catalog Request

PRODUCT MENU

Circuit Protection / Control >
Connectors >
Enclosures >
European Spare Parts >
Foot Switches
Interface Modules >
Power Supplies
Push Buttons & Pilot Lights >
Relays >
Sensors >
Terminal Blocks >
Tower Lights
Wire & Cable Management >
Home

New Products and Promotions

Serving the Automation & Control Industry Since 1984

Circuit Protection



Circuit
Protection
Devices



Busbar
and Power
Distribution



Contactors,
Overload
Relays, Manual
Motor Starters



Motor
Disconnect
Switches



European
Fuses

Connectors



Industrial
Rectangular
Connectors



Pin & Sleeve
Devices



Receptacles

Foot Switches



Foot
Switches



Inductive
Proximity
Sensors

Enclosures



Industrial
Enclosures




DIN
Enclosures



Interface
Modules



Safety
Relays



Slimline
Relays

Modules & Relays

Power Supplies



Power
Supplies



22 & 30 mm
Push Buttons



DIN
Rail



Liquid Tight
Strain Reliefs/
Corrugated
Tubes



Wire Duct

Wire & Cable Management

Terminal Blocks



Din Rail
Terminal
Blocks



Panel Mount
Terminal
Blocks



Printed Circuit
Board Terminal
Blocks



Eurostrips



Distribution
Blocks

Miscellaneous



Ferrules



Custom
Assembly



Marking &
Engraving
Systems



Power
Semi-
conductors



European
Spare Parts



Altech Corporation
35 Royal Road
Flemington, NJ 08822-6000
P 908.806.9400 | F 908.806.9490
www.altechcorp.com

Altech Corp.® 725-032013-1M
Printed April 2013

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Altech:](#)

[GZM80](#) [GZM92](#)