

**SERIES:** CPIM-4410-80T | **DESCRIPTION:** PIEZO BUZZER INDICATOR**FEATURES**

- meets signals of IEC 60601
- indicator
- multiple alarm tones
- general tone


**SPECIFICATIONS**

| parameter             | conditions/description                                         | min | typ | max   | units |
|-----------------------|----------------------------------------------------------------|-----|-----|-------|-------|
| sound type            | IEC60601-1-8, auditory alarm signals of general type           |     |     |       |       |
| rated voltage         |                                                                |     | 5   |       | Vdc   |
| operating voltage     |                                                                | 3.3 |     | 5     | Vdc   |
| current consumption   | standby mode at rated voltage                                  |     |     | 12    | mA    |
|                       | low, medium, high priority mode at rated voltage               |     |     | 20    | mA    |
| input peak current    | at rated voltage                                               |     |     | 150   | mA    |
| rated frequency       | low, medium, high alarm modes                                  | 150 |     | 4,000 | Hz    |
| sound pressure level  | at 10 cm, rated voltage, low, medium, high alarm modes         | 80  | 90  |       | dB    |
| tone                  | silence (standby mode)                                         |     |     |       |       |
|                       | low priority alarm signal (2 beeps repeat every 20 seconds)    |     |     |       |       |
|                       | medium priority alarm signal (3 beeps repeat every 10 seconds) |     |     |       |       |
|                       | high priority alarm signal (10 beeps repeat every 3 seconds)   |     |     |       |       |
| dimensions            | Ø44 x 10.25                                                    |     |     |       | mm    |
| weight                |                                                                |     |     | 8.6   | g     |
| material              | ABS UL94 1/16" HB High Heat (black)                            |     |     |       |       |
| terminal              | pin type                                                       |     |     |       |       |
| operating temperature |                                                                | -30 |     | 85    | °C    |
| storage temperature   |                                                                | -30 |     | 85    | °C    |
| RoHS                  | yes                                                            |     |     |       |       |

Notes: 1. All specifications measured at 5-35°C, humidity at 45-85%, under 86-106kPa pressure, unless otherwise noted.

**SOLDERABILITY**


| parameter      | conditions/description                 | min | typ | max | units |
|----------------|----------------------------------------|-----|-----|-----|-------|
| hand soldering | for maximum 2 seconds                  | 330 |     | 380 | °C    |
| wave soldering | see recommended wave soldering profile |     |     | 250 | °C    |

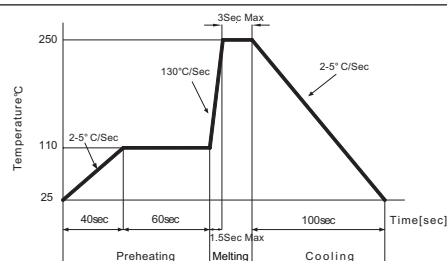

MECHANICAL DRAWING

units: mm  
tolerance: ±0.5 mm

| Tone                                                              | Connections                          |
|-------------------------------------------------------------------|--------------------------------------|
| Silence<br>[Standby mode]                                         | [+] & [-]<br>Connect to power supply |
| Low Priority Alarm Signal<br>[2 beeps repeat every 20 seconds]    | [+] & L connects to [-]              |
| Medium Priority Alarm Signal<br>[3 beeps repeat every 10 seconds] | [+] & M connects to [-]              |
| High Priority Alarm Signal<br>[10 beeps repeat every 3 seconds]   | [+] & H connects to [-]              |

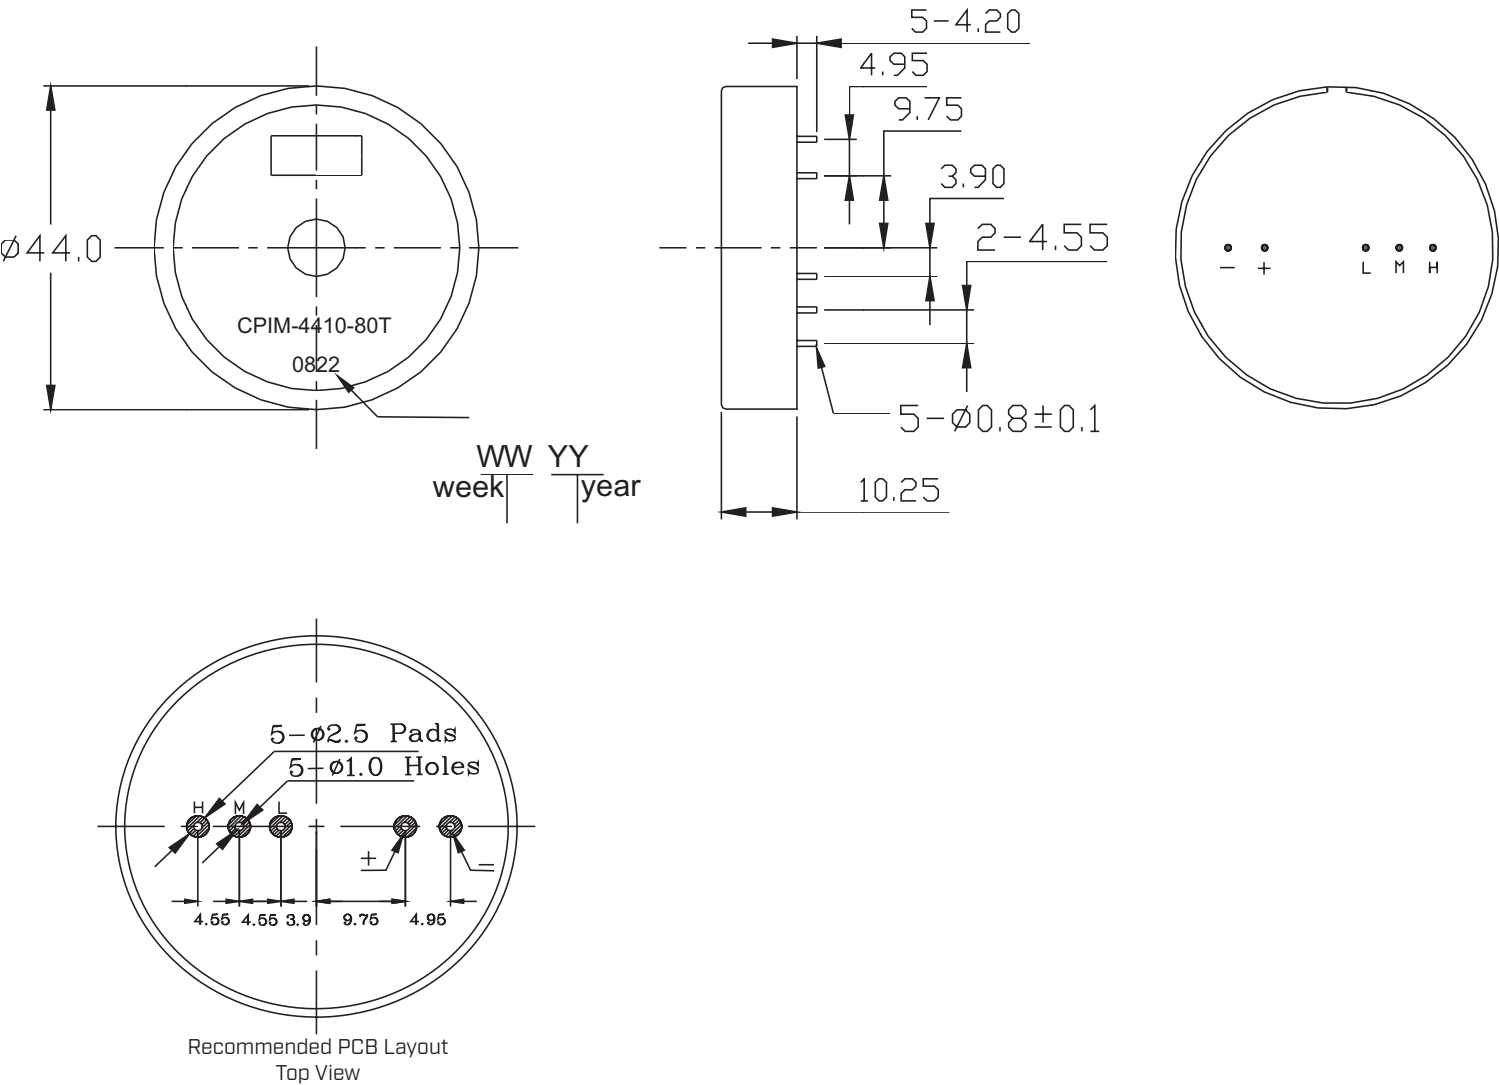

## PACKAGING

units: mm



Inner Box Size: 310 x 248 x 49 mm

Tray QTY: 72 pcs per tray

Carton Size: 550 x 330 x 290 mm

Carton QTY: 720 pcs per carton

|               |                          |
|---------------|--------------------------|
| Lot No.       | XXXXXXXXXX               |
| Part No.      | XXXXXXXXXX<br>XXXXXXXXXX |
| Quantity.     | XXXX Pcs                 |
| Date:         |                          |
| wwyy          | RoHs Compliant           |
| MADE IN CHINA |                          |

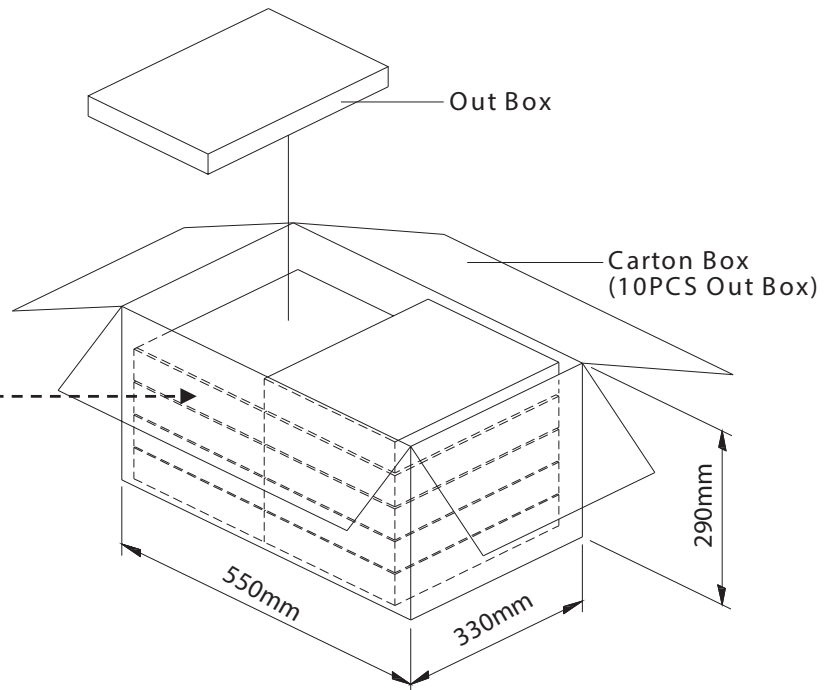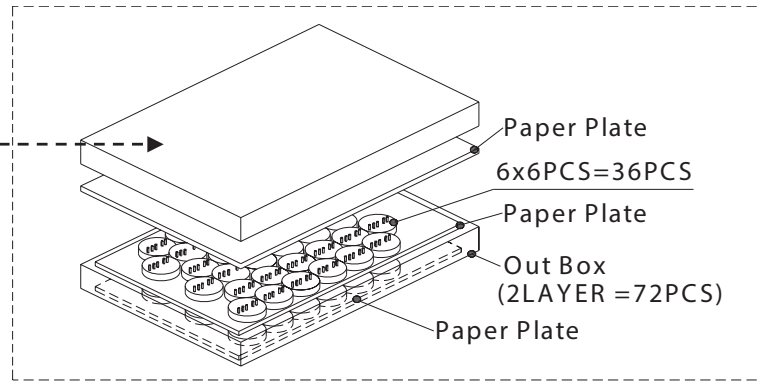

REVISION HISTORY

| rev. | description                       | date       |
|------|-----------------------------------|------------|
| 1.0  | initial release                   | 06/01/2023 |
| 1.01 | CUI Devices rebranded to Same Sky | 09/11/2024 |

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**sameskydevices.com**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Same Sky:](#)

[CPIM-4410-80T](#)