

SOLID STATE RELAY (I/O Module)

MAXIMUM LOAD CURRENT 1 A

SN SERIES

■ FEATURES

- I/O modules for interface between CPU and external input devices or loads
- Ultra slim and light weight, SIL terminals type I/O modules for high density mounting
 - Size: 5 (W) × 20 (L) × 17 (H) mm
 - Weight: approximately 3.0 to 3.5 g
- High isolation by employing photo-coupled devices (between input and output: 2,500 V rms)
- Long life and maintenance free
- All solid state I/O module
- Compatible with NY relay size and terminals arrangement (only output module type)



■ ORDERING INFORMATION

• INPUT MODULE

[Example] $\frac{\text{SN}}{\text{(a)}} - \frac{\text{A}}{\text{(b)}} \frac{100 \text{ BF}}{\text{(c)}}$

(a)	Series Name	SN : SN Series	
(b)	Input Voltage	A : AC type D : DC type	
(c)	Nominal Voltage	100 BF	: 100 VAC
		200 BF	: 200 VAC
		12/24 B	: 12/24 VDC

● OUTPUT MODULE

[Example] $\frac{SN}{(a)} - \frac{12}{(b)} \frac{D}{(c)} \frac{01}{(d)} \frac{HZ}{(e)} - \frac{C}{(f)} \frac{R}{(g)} \frac{T}{(h)}$

(a)	Series Name	SN : SN Series	
(b)	Nominal Voltage (Input side)	3 : 3 VDC (only AC type) 5 : 5 VDC 12 : 12 VDC 24 : 24 VDC	
(c)	Load Voltage	A : AC type D : DC type	
(d)	Load Current	01 : 1 A	
(e)	Kinds of Inverse Connection Protecting Element	AC type	Nil : with varistor NV: without varistor
		DC type	Nil : Diode HZ: Zener diode
(f)	Zero Cross function (AC type)	F : without zero cross function C : with zero cross function	
(g)	Output Polarity (DC type)	Nil : Standard polarity R : Reverse polarity	
(h)	Switching Speed (DC type)	Nil : Standard T : High speed type	

■ SPECIFICATIONS

• INPUT MODULE (SN-() B Type)

Item		AC Input module		DC Input module		Remarks
		100 VAC Type	200 VAC Type	12/24 VDC Type		
INPUT side	Input Voltage Range	80 to 132 Vrms	160 to 265 Vrms	9.6 to 28.8 VDC		
	Rating Input Current	Approx. 7 mArms		Approx. 5 mA (at 12 VDC)	Approx. 10 mA (at 24 VDC)	
	Power Frequency Range	47 to 63 Hz		—	—	
	Must Operate Voltage (max.)	80 Vrms	160 Vrms	9.6 VDC		
	Must Release Voltage (max.)	30 Vrms	60 Vrms	5.0 VDC		
	Must Release Current (min.)	2 mArms		1.5 mA		
OUTPUT side	DC Supply Voltage	4 to 6 VDC				V _{DD}
	Maximum Output Current	±4 mA		±0.4 mA		V _{DD} = 5 V
	Output Logic	Operate with negative true logic (active low)				
Maximum Operate Time (max.)		25 ms		10 ms		
Maximum Release Time (max.)		30 ms		10 ms		
Insulation Resistance (initial value)		Minimum 1,000 M Ω (at 500 VDC)				for input-output
Dielectric Strength		2,500 Vrms 1 minute				
Operating Temperature Range		−30°C to + 85°C				no
Storage Temperature Range		−40°C to +100°C				frost
Case Color		Yellow		White		
Weight		Approximately 2.0 g		Approximately 3.3 g		

• OUTPUT MODULE Standard Type

Item Remarks			AC Output module		DC Output module	
			with zero cross	without zero cross		
INPUT side	Nominal Voltage (DC)		3 V, 5 V, 12 V, 24 V		5 V, 12 V, 24 V	
	Operate Voltage Range		±20% of nominal voltage			
	Must Operate Voltage		max.80% of nominal voltage			
	Must Release Voltage		Minimum 1 VDC (minimum 0.5 V*)			*3 VDC type
	Input Impedance (±10%)	3 VDC Type	130 Ω	180 Ω	—	
		5 VDC Type	330 Ω	470 Ω	390 Ω	
		12 VDC Type	1,0k Ω	1,5k Ω	1,2k Ω	
		24 VDC Type	2,2k Ω	3,0k Ω	2.4k Ω	
OUTPUT side	Load Voltage Range		24 to 265 Vrms		3 to 30 VDC	
	Maximum Load Current		1.0 Arms		1.0 A	see CHARACTERISTIC DATA
	Minimum Load Current		10 mArms		1 mA	
	Switching Current		50 A (60 Hz)		3 A (10 ms)	
	Max. Off-State Leakage Current		1.5 mArms (at 100 Vrms 60 Hz) 3.0 mArms (at 200 Vrms 60 Hz)		0.1 mA (at 30 VDC)	
	Max. On-State Voltage Drop		1.2 Vrms		1.2 V	at max. load current
Maximum Operate Time (max.)			1 ms	1/2 cycle ±1 ms	1 ms	
Maximum Release Time			1/2 cycle + 1ms		1 ms	
Insulation Resistance			Minimum 1,000 M Ω (at 500 VDC)			for input-output
Dielectric Strength			2,500 Vrms 1 minute			
Operating Temperature Range			−30°C to + 85°C			no
Storage Temperature Range			−40°C to +100°C			frost
Case Color			Black		Red	
Weight			Approximately 3.5 g		Approximately 2.9 g	

• OUTPUT MODULE High Speed Switching Type

Item		AC Output module	Remarks
INPUT side	Nominal Voltage (DC)	5 V, 12 V, 24 V	
	Operate Voltage Range	±20% of nominal voltage	
	Must Operate Voltage	80% of nominal voltage	
	Must Release Voltage	Minimum 1 V	
	Input Impedance	5 VDC Type	330 Ω ±10%
		12 VDC Type	1,0 k Ω ±10%
		24 VDC Type	2,0 k Ω ±10%
OUTPUT side	Load Voltage	DC3 to 30V	
	Maximum Load Current	1.0 A	see CHARACTERISTIC DATA
	Minimum Load Current	1 mA	
	Switching Current	3 A (10 ms)	
	Max. Off-State Leakage Current	0.1 mA (at 30 VDC)	
	Max. On-State Voltage Drop	1.2 V	at max. load current
Maximum Operate Time		max. 5 μs	at DC 5 V 0.1A
Maximum Release Time		max. 25 μs	
Insulation Resistance		Minimum 1,000 M Ω (at 500 VDC)	for input-output
Dielectric Strength		2,500 V rms 1 minute	
Operating Temperature Range		−40°C to + 100°C	
Storage Temperature Range		−30°C to + 85°C	
Case Color		Red	
Weight		Approximately 2.9 g	

■ BLOCK DIAGRAM

• INPUT MODULE

LOAD	INSULATION	CIRCUITS	Input/Output waveform (resistive load)
DC Logic output	Photo-transistor coupler		
	Photo-transistor coupler		


• OUTPUT MODULE

LOAD	INSULATION	CIRCUITS	Input/Output waveform (resistive load)
AC	Photo-triac coupler		
DC	Photo-transistor coupler		

* AC type without varistor / DC type with zenor diode available.

■ CHARACTERISTIC DATA


• OUTPUT MODULE

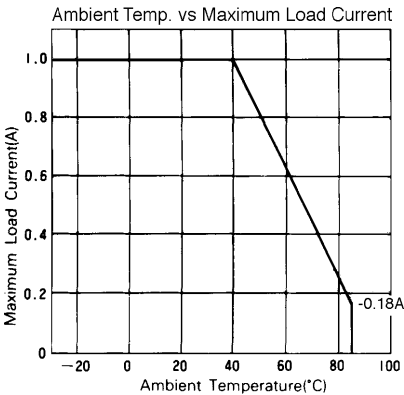


REFERENCE DATA

INPUT MODULE


Distribution of Operate & Release Voltage
(AC Type)

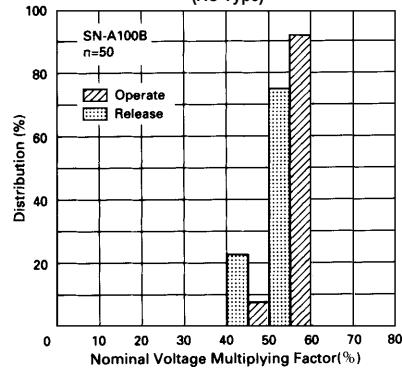

High temperature Switching Test
(AC Type)

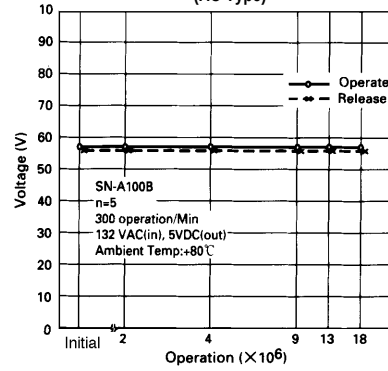


High temperature Continuous Operating Test
(AC Type)

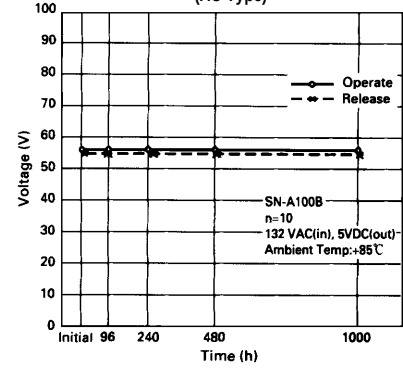


OUTPUT MODULE


Distribution of Operate & Release Voltage
(AC Type)

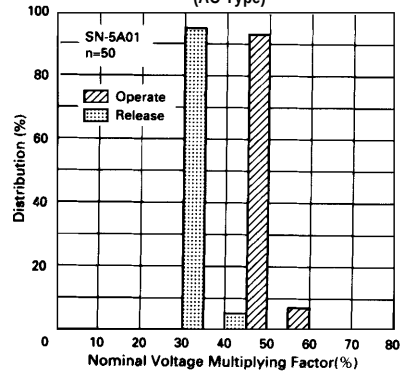

Distribution of Operate & Release Voltage
(DC Type)

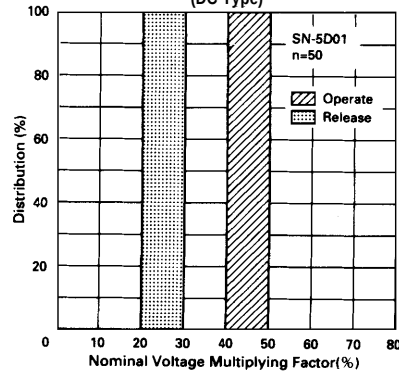


Distribution of On-State Voltage Drop
(AC Type)

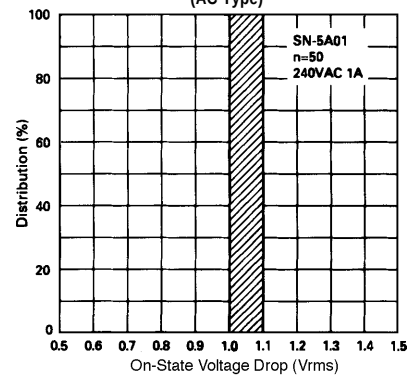


■ DIMENSIONS

● Dimensions


SN-A () type (input module)

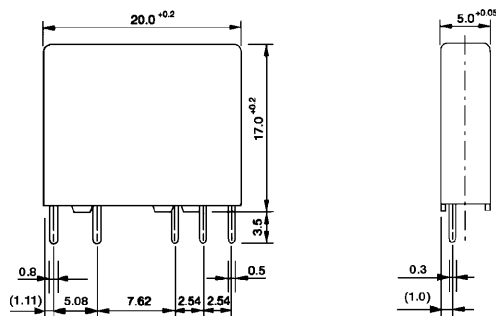

SN-D () type (input module)

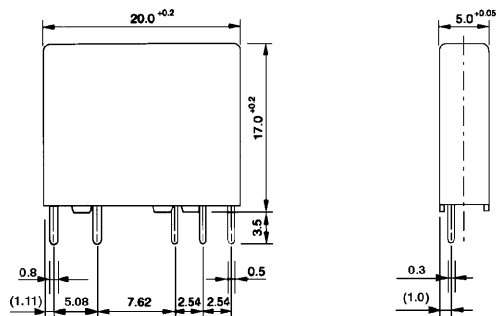


SN-A () type (output module)

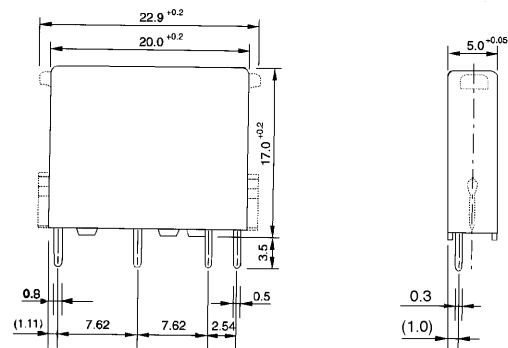





Dotted line : Socket mounting SN-()A-S type

SN-() D, ()D () R type (output module)

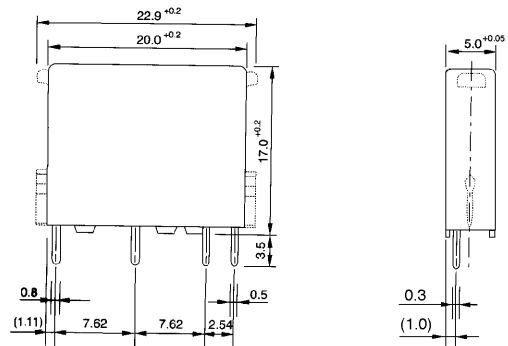





Dotted line : Socket mounting SN-()D-S type

● Schematics (BOTTOM VIEW)




* Reverse polarity type available

● PC board mounting hole layout (BOTTOM VIEW)




Unit: mm

■ Socket Dimensions

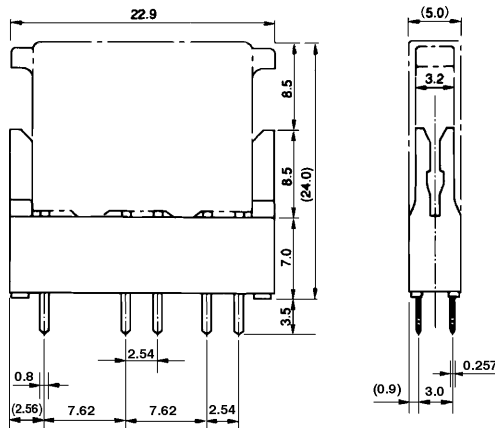


■ Socket PC board mounting hole layout (BOTTOM VIEW)



Unit: mm

■ NOTES

1. Polarity of terminals is pre-determined. Please design your circuit accordingly.
2. Socket ordering code: JL-5N
3. Standard IC socket is not recommended. Please use socket "JL-5N".
4. When switching inductive load by AC output module without varistor, please connect a varistor as shown in drawing below.
5. AC input module has inside logic IC. Please connect bypass condenser (approx. 0.01 μ) at pivotal points between VDD and GND. (Conform to general handling instructions for logic IC.)

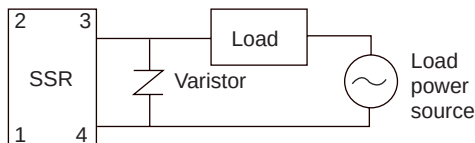

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: marcom@fcai.fujitsu.com
Web: www.fcai.fujitsu.com

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fceu.fujitsu.com

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
www.fcal.fujitsu.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fujitsu:

[SN-12A01](#) [SN-3A01](#) [SN-5A01](#) [SN-24A01](#)