

**0.9 dB NF Low Noise Amplifier, Operating from
10 MHz to 600 MHz with 40.5 dB Gain, 20 dBm Psat
and SMA**

The FMAM1063 is a low noise coaxial amplifier operating in the 10 MHz to 600 MHz frequency range. Impressive broadband typical performance includes 0.9 dB noise figure, 40.5 dB small signal gain, +19 dBm P1dB, and an output 3rd order intercept point of +34 dBm. This exceptional technical performance is achieved through the use of a hybrid MIC design and advanced E-pHEMT devices. The low noise amplifier requires a +12V DC power supply, and operates over a temperature range of -40°C to +85°C. The rugged and compact package supports SMA Female connectors and RFI and Ground pins. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for Humidity, Shock, Vibration, and Altitude.

Electrical Specifications (TA = +25°C, DC Voltage = 12Vdc, DC Current = 140mA)

Description	Min	Typ	Max	Unit
Frequency Range	10		600	MHz
Small Signal Gain	38.5	40.5		dB
Gain Flatness		±0.8	±1.2	dB
Gain Variation Over Temperature		0.02		dB/°C
Output at 1 dB Compression Point	+19	+19		dBm
Saturated Output Power (Psat)	+18	+20		dBm
Output 3rd Intercept Point	+31	+34		dBm
Noise Figure		0.9	1.1	dB
Input VSWR		1.6:1	2:1	
Output VSWR		1.3:1	2:1	
Reverse Isolation		-55		dB
Operating DC Voltage	9	12	15	Volts
Operating DC Current		140	160	mA
Operating Temperature Range	-40		+85	°C

Absolute Maximum Rating

Parameter	Rating	Units
Supply Voltage	+20	V
RF Input Power	+15	dBm
Operating Temperature	-40 to +85	°C
Storage Temperature	-55 to +125	°C



ESD Sensitive Material, Transport material in Approved
ESD bags. Handle only in approved
ESD Workstation.



Features:

- 10 MHz to 600 MHz Frequency Range
- Low Noise Figure: 0.9 dB
- High Dynamic Range
- Efficient GaAs pHEMT Design
- Small Signal Gain: 40.5 dB
- Output P1dB: +19 dBm
- Output IP3: +34 dBm
- Operating Temperature: -40°C to +85°C
- 50 Ohm Input and Output Matched
- DC Power Supply: +12V / 140 mA
- SMA Female Connectors
- Designed to meet MIL-STD-202 Test Conditions

Applications:

- Test & Measurement
- R&D Labs
- General Purpose Amplification
- Aerospace & Defense
- Wireless Infrastructure
- Communication Systems

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Mechanical Specifications

Size

Length	1.79 in [45.47 mm]
Width	1.1 in [27.94 mm]
Height	0.45 in [11.43 mm]
Weight	0.0965 lbs [43.77 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +125 deg C

Humidity	MIL-STD-202F, Method 103B, Condition B
Shock	MIL-STD-202F, Method 213B, Condition B
Vibration	MIL-STD-202F, Method 204D, Condition B
Altitude	MIL-STD-202F, Method 105C, Condition B


Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data


Notes:

- Values at 25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Typical Performance Data

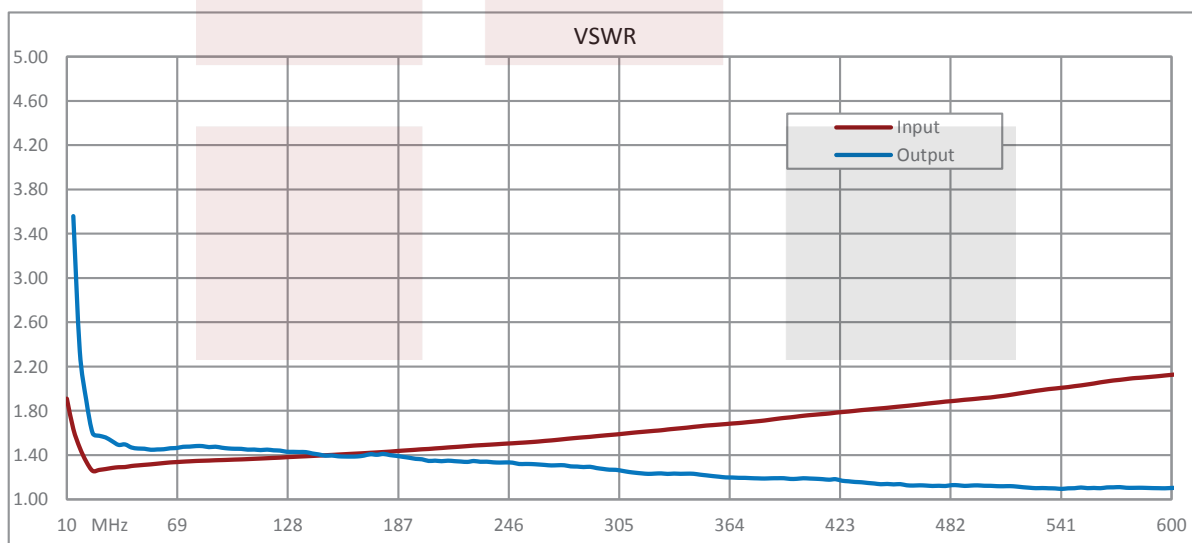

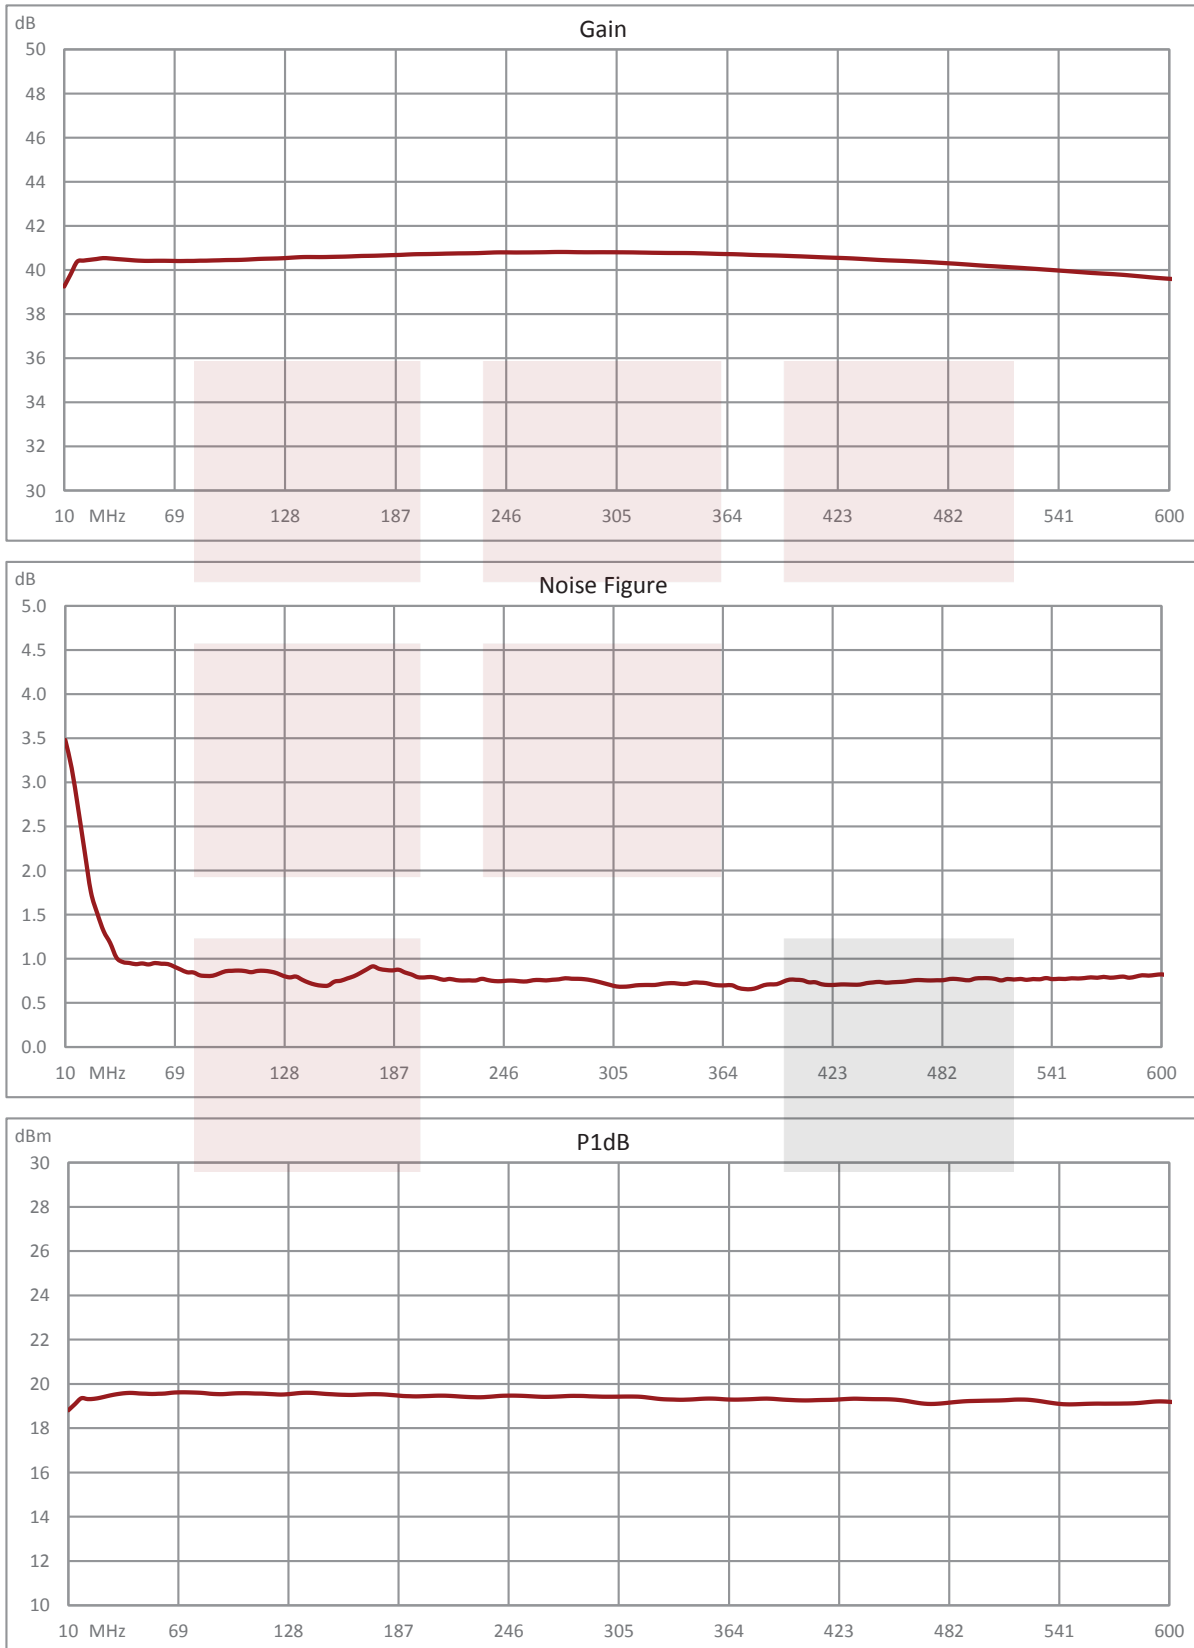

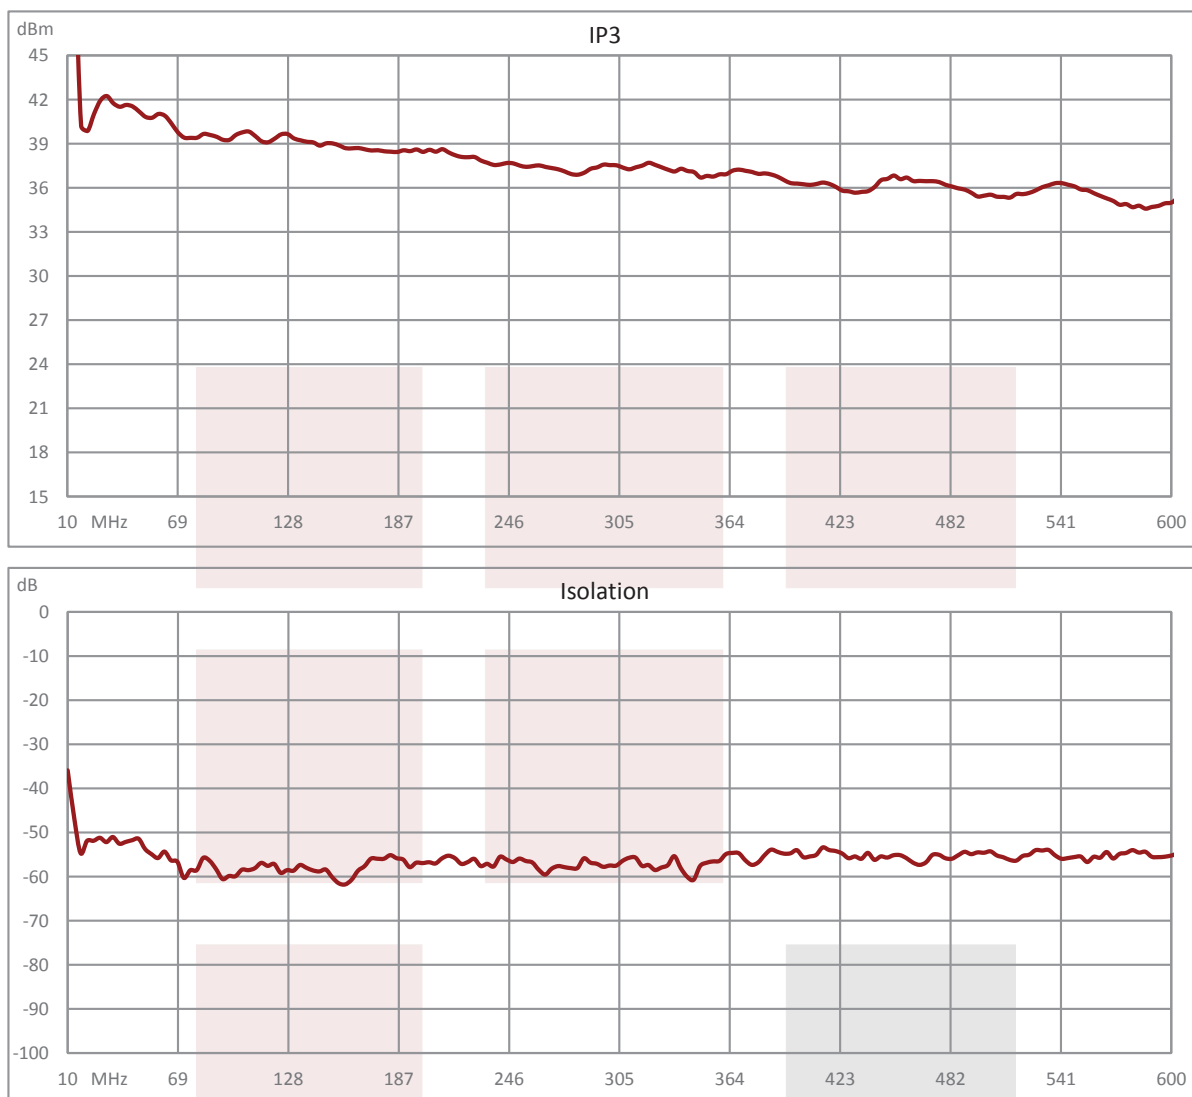


0.9 dB NF Low Noise Amplifier, Operating from 10 MHz to 600 MHz with 40.5 dB Gain, 20 dBm Psat and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [0.9 dB NF Low Noise Amplifier, Operating from 10 MHz to 600 MHz with 40.5 dB Gain, 20 dBm Psat and SMA FMAM1063](https://www.fairviewmicrowave.com/0.9db-nf-low-noise-amplifier-40.5db-fmam1063-p.aspx)

URL: <https://www.fairviewmicrowave.com/0.9db-nf-low-noise-amplifier-40.5db-fmam1063-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

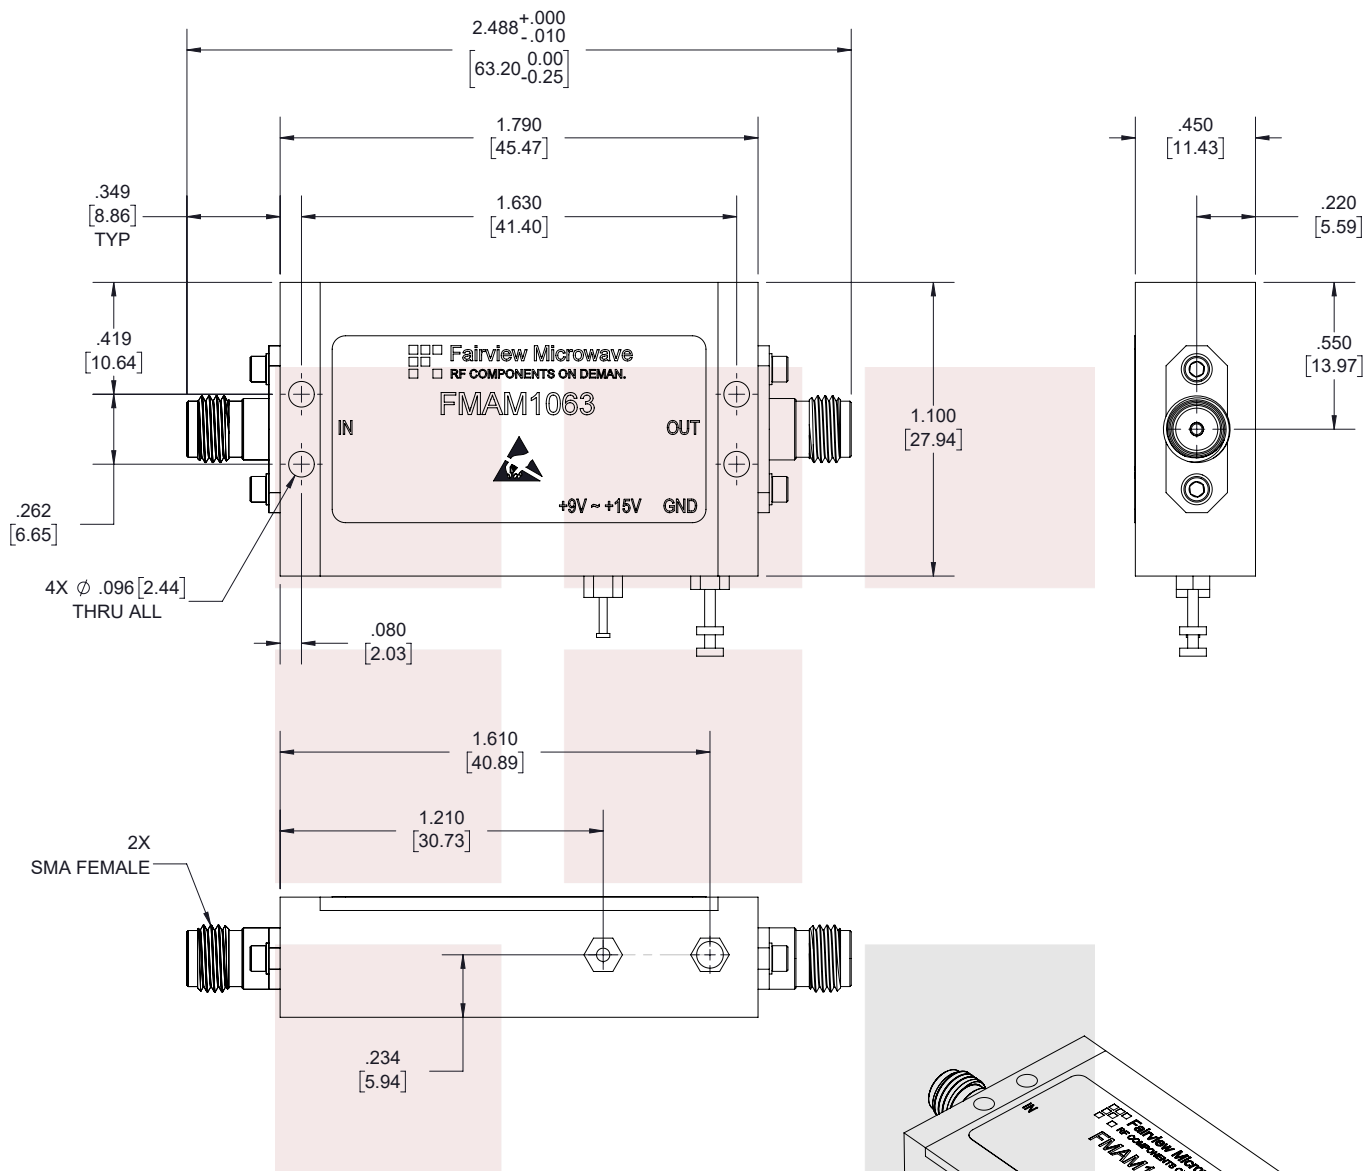

STANDARD TOLERANCES

.X ± 0.2
.XX ± 0.01
.XXX ± 0.005

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES



Fairview Microwave RF COMPONENTS ON DEMAND. <i>Done!</i>	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
TITLE	DWG NO FMAM1063		CAGE CODE 3FKR5			
0.9 dB NF Low Noise Amplifier, Operating from 10 MHz to 600 MHz with 40.5 dB Gain, 20 dBm Psat and SMA	CAD FILE 03/26/19	SHEET 1 OF 1	SCALE N/A	SIZE A	7361	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Fairview Microwave:](#)

[FMAM1063](#)