

FMC1938316-72 **DATA SHEET**

RA MMCX Plug to BNC Female Bulkhead Cable RG316 Coax in 72 Inch

The RA MMCX plug to BNC female bulkhead 72 inch cable using RG-316 coax, part number FMC1938316-72, from Fairview Microwave is in-stock and ships same day. This Fairview MMCX to BNC cable assembly has a plug to female gender configuration with 50 ohm flexible RG316 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC1938316-72 MMCX plug to BNC female cable assembly operates to 3 GHz. The right angle MMCX interface on the RG316 cable allows for easier connections in tight spaces. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Т	ур М	1ax	Units
Frequency Range	DC			3	GHz
VSWR			1	.5:1	
Velocity of Propagation		7	'0		%
Capacitance		32 [1	04.99]	р	F/ft [pF/m]

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.05	0.1	0.4	1	3	GHz
Insertion Loss (Typ.)	0.75	0.96	1.56	2.58	3.78	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in the assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Length* 72 in [182.88 cm] Weight 0.106 lbs [48.08 g]

Cable

Cable Type RG316 50 Ohms Impedance Inner Conductor Type Solid Inner Conductor Material and Plating Copper, Silver Dielectric Type PTFE



Configuration:

- MMCX Plua Right Angle
- BNC Female Bulkhead
- RG316

Features:

- Max Frequency 3 GHz
- 70% Phase Velocity
- FEP Jacket

Applications:

- General Purpose
- · Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com

sales@fairviewmicrowave.com





Number of Shields Shield Layer 1 Shield Layer 2 Jacket Material Jacket Diameter

1 Silver Plated Copper Tape Silver Plated Copper Braid FEP, Black 0.098 in [2.49 mm]

Connectors

Description	Connector 1	Connector 2		
Туре	MMCX Plug	BNC Female		
Mount Method		Bulkhead		
Impedance	50 Ohms	50 Ohms		
Contact Material & Plating	Brass, Gold	Brass, Gold		
Contact Plating Spec.		30µ in. minimum		
Dielectric Type	Teflon	PTFE		
Body Material & Plating	Brass, Gold	Brass, Nickel		
Body Plating Spec.		100µ in. minimum		

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

FMC1938316 - xx uu | cm = Centimeters | cblank > = Inches | Length

Example: FMC1938316-12 = 12 inches long cable FMC1938316-100cm = 100 cm long cable





RA MMCX Plug to BNC Female Bulkhead Cable RG316 Coax in 72 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: RA MMCX Plug to BNC Female Bulkhead Cable RG316 Coax in 72 Inch FMC1938316-72

URL: https://www.fairviewmicrowave.com/ra-mmcx-male-bnc-female-cable-m17-113-rg316-coax-fmc1938316-72-p.aspx







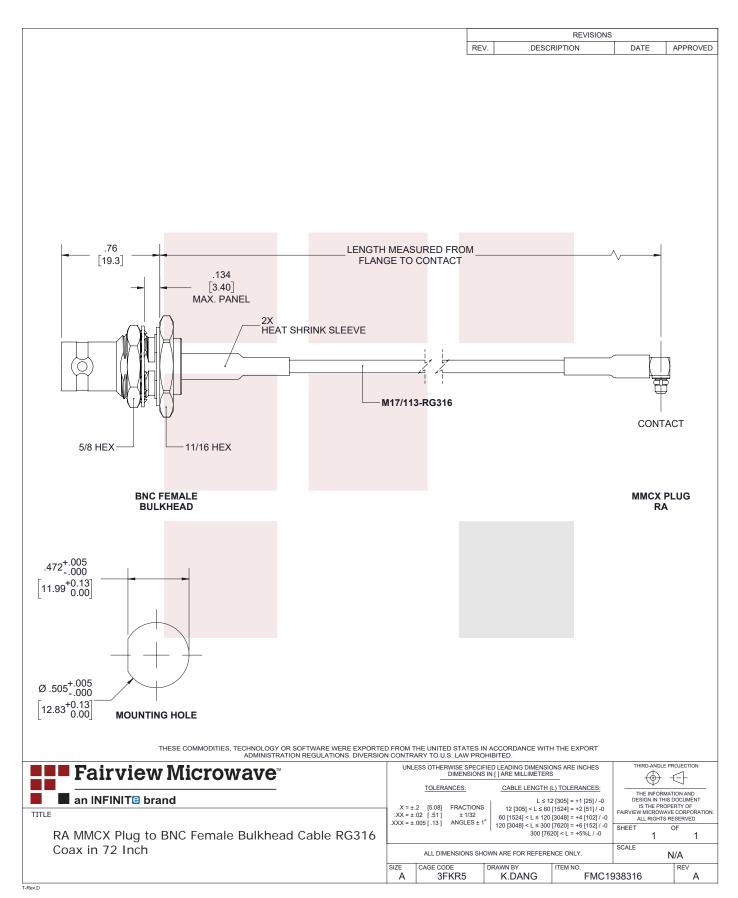

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fairview Microwave:

FMC1938316-72