



N Dual Directional Coupler 50 dB Coupled Port From 2 MHz to 30 MHz Rated To 2500 Watts

Electrical Specifications

Description	Min	Тур	Max	Units	
Frequency Range	2		30	MHz	
Directivity	22			dB	
Impedance		50		Ohms	
Insertion Loss			0.15	dB	
Input Power			2.5	KWatts	
Input VSWR			1.25:1		
Coupling Accuracy			50	dB	
Coupling Tolerance			± 1.5	dB	
Coupling Flatness			± 0.3	dB	



Features:

- Connector 1: N Female
- Connector 2: N Female
- Coupled Connectors: SMA Female
- Design: Dual Directional Coupler

Mechanical Specifications

Temperature

Operating Range +85 to -55 deg C

Size

 Length
 4 in [101.6 mm]

 Width/Dia.
 1.2 in [30.48 mm]

 Height
 1.63 in [41.4 mm]

Housing Material and Plating Aluminum Alloy, Chem Film

Connector 1

Type N Female

Connector 2

Type N Female

Connector 3

Type SMA Female

Connector 4

Type SMA Female

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Compliance Certifications (visit www.FairviewMicrowave.com for current document)

Plotted and Other Data

Notes:

N Dual Directional Coupler 50 dB Coupled Port From 2 MHz to 30 MHz Rated To 2500 Watts from Fairview Microwave is instock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001: 2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: N Dual Directional Coupler 50 dB Coupled Port From 2 MHz to 30 MHz Rated To 2500 Watts FMCP1000

URL: http://www.fairviewmicrowave.com/n-dual-directional-coupler-50-db-30-mhz-2500-watts-fmcp1000-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





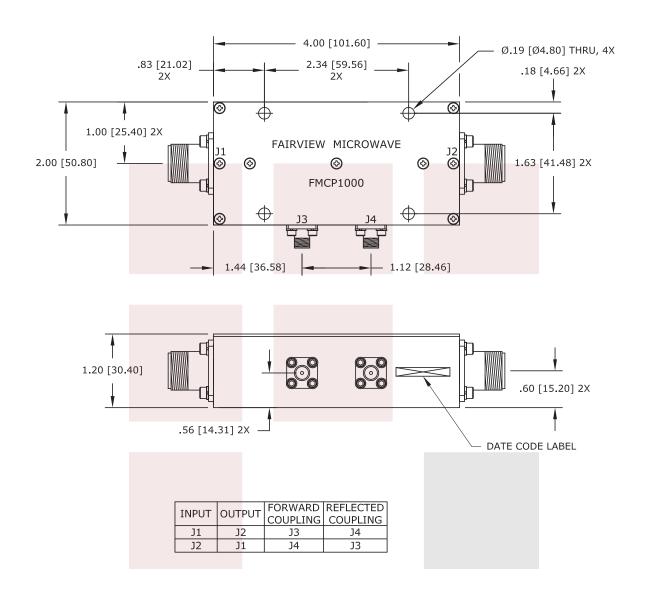

TOLERANCE .XX \pm .02 .XXX \pm .005 ANG. \pm 1/2°

 $[\]ensuremath{^{*}}$ THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE $\ensuremath{^{\#1}}$ ON TITLE BLOCK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
N Dual Directional Coupler 50 dB Coupled Port From 2 MHz to 30 MHz Rated To 2500 Watts	DWG NO FMCP1000			CAGE CODE 3FKR5		
	CAD FILE 041015	SHEET	SCAL	E N/A	SIZE A	2233

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fairview Microwave:

FMCP1000