

LCCA30462-FT1



Configuration

- Connector 1: BNC Female BulkheadConnector 2: TNC Male Right Angle
- Cable Type: LC141TB

Features

- · Max Frequency 1 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 69.9% VoP

Applications

- · General Purpose
- · Laboratory Use

- Hand Formable
- Tin Filled Copper Braid Outer Conductor
- · System Interconnect



Description

L-com's LCCA30462-FT1 is a BNC female bulkhead to TNC male right angle cable assembly using LC141TB coax, 1 FT and ships same-day. The LC141TB coax of this BNC cable uses the PTFE dielectric with a VoP of 69.5%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com BNC to TNC cable assembly has a female to male gender configuration with formable LC141TB series coax and operates to 1 GHz. The tinned copper braid outer conductor is easily formed by hand with an overall diameter of inches and excellent shielding effectiveness greater than 110dB. L-com's RF cable assembly with BNC bulkhead interface enables system designers to have external connections on their product enclosures or to be used for other rack mount and panel mount applications. This right angle TNC cable interface on the LC141TB coax allows for easier connections in tight spaces.

Custom versions of this BNC female to BNC male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30462-FT1 L-com BNC Female Bulkhead to TNC Male Right Angle Cable Assembly using LC141TB Coax, 1 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.



LCCA30462-FT1

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.45:1	
Velocity of Propagation		69.5		%
RF Shielding	110			dB
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Con	nductor	7.8 [25.59]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Cor	nductor	5.5 [18.04]		Ohms/1000ft [Ohms/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	500	1,000				MHz
Insertion Loss (Max.)	0.28	0.32				dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length 12 in [304.8 mm]

Cable

Cable TypeLC141TBImpedance50 OhmsInner Conductor TypeSolidInner Conductor Material and PlatingCopper, Silver

Dielectric Type PTFE

Outer Conductor Material and Plating Tinned Copper Braid

Repeated Minimum Bend Radius 0.625 in [15.88 mm]



LCCA30462-FT1

Connectors

Description	Connector 1	Connector 2	
Туре	BNC Female Bulkhead	TNC Male Right Angle	
Impedance	50 Ohms	50 Ohms	
Contact Material and Plating		Brass, Gold over Nickel	
Dielectric Type		PTFE	
Body Material and Plating Brass, Nickel		Brass, Nickel	
Coupling Nut Material and Plating		Brass, Nickel	

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


• Values at 25°C, sea level.



LCCA30462-FT1



How to Order




Example: LCCA30462-12 = 12 inches long cable LCCA30462-100cm = 100 cm long cable

BNC Female Bulkhead to TNC Male Right Angle Cable Assembly using LC141TB Coax, 1 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to instock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

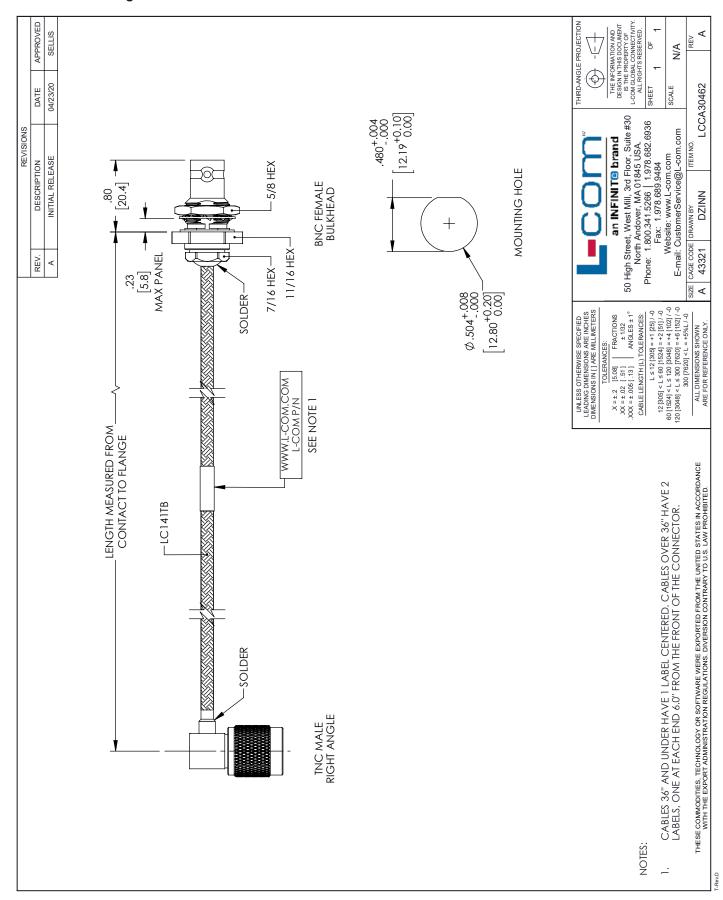

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

infinite Electronics:

LCCA30462-FT1