

N Female Bulkhead to SMA Female Cable Assembly using LC141TBJ Coax, 1.5 FT

LCCA30484-FT1.5



Configuration

- Connector 1: N Female BulkheadConnector 2: SMA Female
- Cable Type: LC141TBJ


Features

- Max Frequency 10 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 69.9% VoP

Applications

- · General Purpose
- Laboratory Use

- Hand Formable
- Tin Filled Copper Braid Outer Conductor
- · System Interconnect

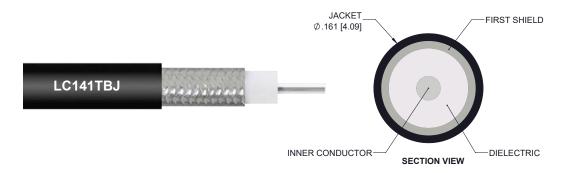

Description

L-com's LCCA30484-FT1.5 is a N female bulkhead to SMA female cable assembly using LC141TBJ coax, 1.5 FT and ships same-day. The LC141TBJ coax of this N cable uses the PTFE dielectric with a VoP of 70%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com N to SMA cable assembly has a female to female gender configuration with formable LC141TBJ series coax and operates to 10 GHz. The jacketed tinned copper braid outer conductor is easily formed by hand with an overall diameter of 0.161 inches and excellent shielding effectiveness greater than 100dB. L-com's RF cable assembly with N bulkhead interface enables system designers to have external connections on their product enclosures or to be used for other rack mount and panel mount applications.

Custom versions of this N female to N female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30484-FT1.5 L-com N Female Bulkhead to SMA Female Cable Assembly using LC141TBJ Coax, 1.5 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.



N Female Bulkhead to SMA Female Cable Assembly using LC141TBJ Coax, 1.5 FT



LCCA30484-FT1.5

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.45:1	
Velocity of Propagation		70		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Cond	ductor	8.23 [27]		Ohms/1000ft [Ohms/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	10	GHz
Insertion Loss (Max.)	0.32	0.38	0.48	0.64	0.88	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

 Length
 18 in [457.2 mm]

 Diameter
 0.866 in [22 mm]

Cable

Cable TypeLC141TBJImpedance50 OhmsInner Conductor TypeSolidInner Conductor Material and PlatingCopper, Sil

Inner Conductor Material and Plating Copper, Silver Dielectric Type PTFE

Outer Conductor Material and Plating Tinned Copper Braid

Jacket MaterialFEP, BlackJacket Diameter0.161 in [4.09 mm]

One Time Minimum Bend Radius 0.315 in [8 mm]
Repeated Minimum Bend Radius 1.575 in [40.01 mm]



N Female Bulkhead to SMA Female Cable Assembly using LC141TBJ Coax, 1.5 FT

LCCA30484-FT1.5

Connectors

Description	Connector 1	Connector 2
Туре	N Female Bulkhead	SMA Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Phosphor Bronze, Gold over Nickel	Beryllium Copper, Gold over Nickel
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Gold over Nickel

Environmental Specifications

Temperature

Operating Range -65 to +150 deg CStorage Range +10 to +35 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


• Values at 25°C, sea level.



N Female Bulkhead to SMA Female Cable Assembly using LC141TBJ Coax, 1.5 FT

LCCA30484-FT1.5

How to Order




Example: LCCA30484-12 = 12 inches long cable

LCCA30484-100cm = 100 cm long cable

N Female Bulkhead to SMA Female Cable Assembly using LC141TBJ Coax, 1.5 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

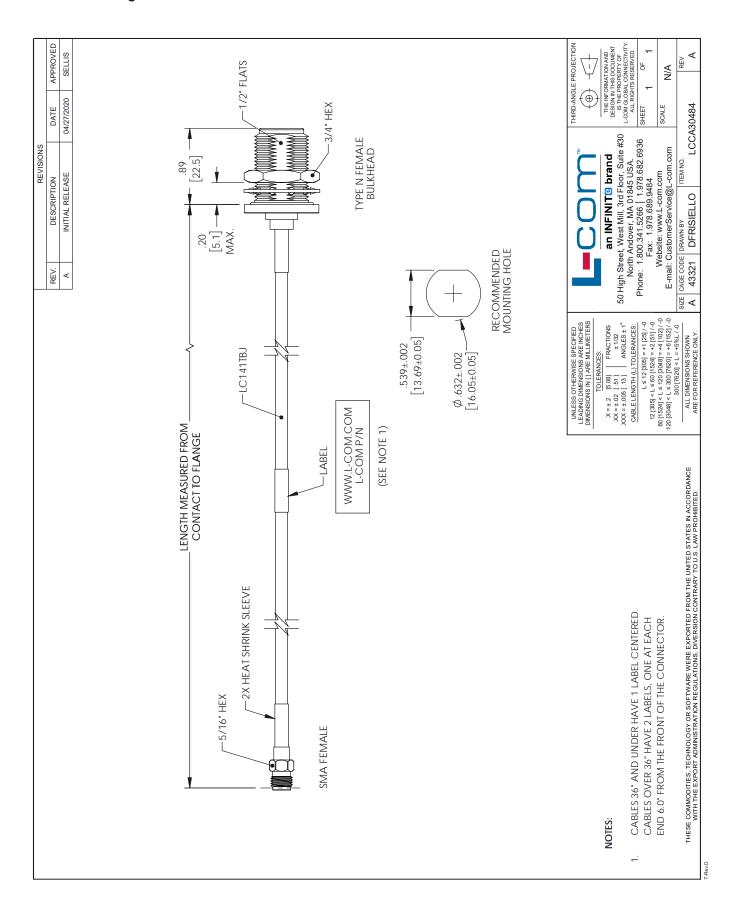

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

infinite Electronics:

LCCA30484-FT1.5