

founded by Philips


The USB-Dongle and **DB-PLCC44-SKT** allow quick and easy ICP programming of the several 44 pin microcontrollers. The unit also provides a low cost platform for testing or prototyping of simple microcontroller based designs. The USB-Dongle provides a Virtual COM Port interface to the PC and allows hex files to be downloaded and programmed using Flash Magic or other common utilities. The USB-Dongle provides all power needed by the various Derivative Boards so no external power supply is required. Low cost Derivative Boards are available for many different microcontrollers from NXP. Please consult our website for details at www.teamfdi.com

- Low cost tool for prototyping
- USB port powered so no external Power Supply required
- Supports USB 2.0
- Plugs directly into any standard USB Port – great for laptops
- Works with NXP free Flash Magic software that can be downloaded from the web

- USB-Dongle Kit Includes:
 - ◆ USB-Dongle
 - ◆ Download docs and software examples at **www.teamfdi.com/USB Dongle**
 - ◆ Derivative Boards for many microcontrollers are available

Technical Details

The **DB-PLCC44-SKT** uses a PCB edge finger connector to interface to the USB-Dongle.

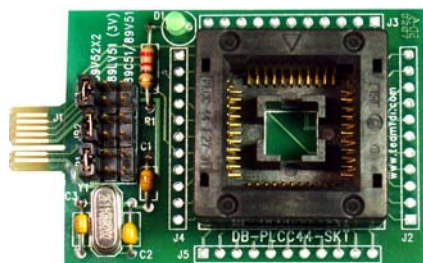

Board Dimensions 2.505" x 1.560"

Target Interface

The USB-Dongle includes a 14 pin connector to the Derivative Board that utilizes the following signals. Not all signals are used on all Derivative Boards:

ISP/ICPn	5V (USB power, unswitched)
Switched Power (3V for ICP) or Reset (High True for 8051 ISP)	Reset (Low True) (for ICP & LPC2000 ARM)
Ground	3V (unswitched)
PCL/SCL (ICP/I2C)	PDA/SDA (ICP/I2C)
TXD (UART)	RXD (UART)
MSIO (SPI)	PSEN/P0.14 (ISP entry)
SCLK (SPI)	MOSI (SPI)

Example of USB-Dongle and Derivative Board

USB-Dongle



DB-HVSON10-LPC9103

Device Selection Jumpers –The **DB-PLCC44-SKT** has 3 jumper blocks JP1, JP2 and JP3 to allow the user to easily select between supported microcontrollers for programming. Consult the **DB-PLCC44-SKT** schematic for the correct jumper settings for your target device.

Headers – The **DB-PLCC44-SKT** brings every pin of the microcontroller out to a standard 0.10" spacing header footprint for easy probing of signals or to support prototyping or wire-wrapping. Consult the **DB-PLCC44-SKT** schematic if there are any questions about pin alignment from the microcontroller to the headers.

Power – The USB-Dongle provides the regulated 5.0V and 3.3V power required by the **DB-PLCC44-SKT**.

LED - A green activity or status LED is provided at location D1 on the Derivative Board. This LED can be used to indicate when the microcontroller is being programmed or for other types of user activity under software control.

Crystal or Clock Frequency - The **DB-PLCC44-SKT** is clocked by an external 11.0592 MHz crystal oscillator located at position Y1 on the DB.

Ordering Information

Order Online at:

www.mouser.com

Availability: Stock

FDI Contact Info:

(800) 278-0293 Phone

(256) 883-1241 FAX

E-mail: sales@teamfdi.com

www.teamfdi.com

All brand names and product names are trademarks or registered trademarks of their respective holders.

FDI *Future Designs, Inc.*
Your Development Partner

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Future Designs, Inc. \(FDI\):](#)

[DB-PLCC44-SKT](#)