

PicoDLynxII™: Non-Isolated DC-DC Power Modules

PicoDLynxII™ Series Evaluation Board Documentation

The PicoDLynxII™ series evaluation board (PJT020/014/007/004)) comes with an assembled module and test components. The specific combination of module and the board can be ordered through your sales representative

1. Schematics

Component values are for reference only; refer to the data sheet for appropriate values and pictures in this document for preinstalled component.

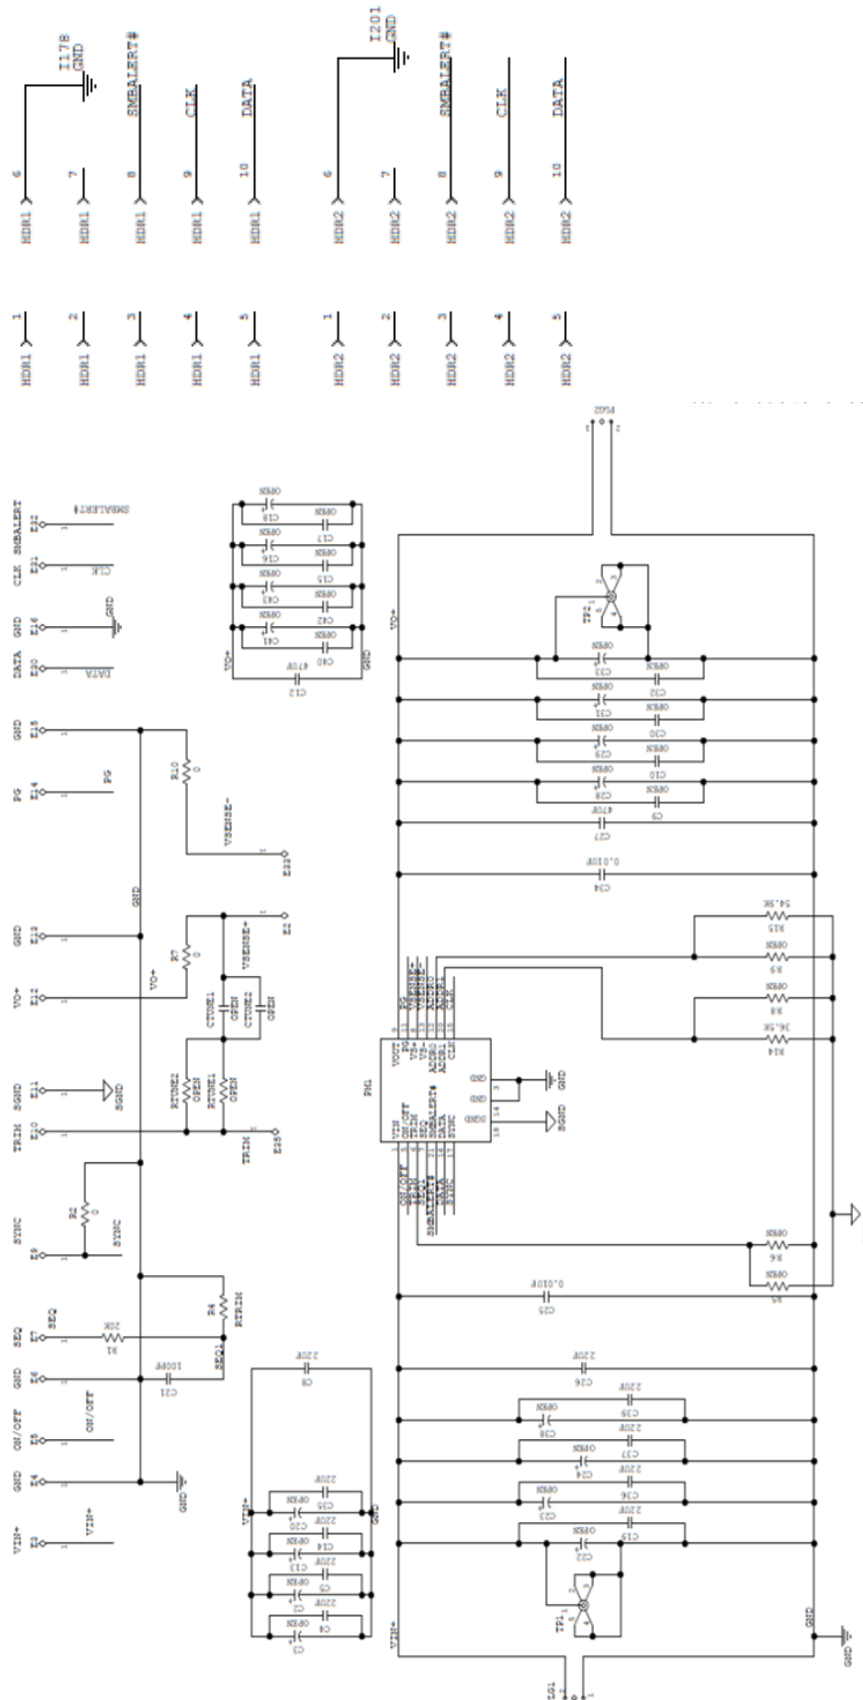


Figure 1 - Schematic of the PicoDlynx™ single footprint evaluation board.

Component values are for reference only; refer to the data sheet for appropriate values and pictures in this document for preinstalled components

2. Physical Description

An annotated photograph of the PicoDLynxII™, single footprint evaluation board is shown below. The arrows indicate locations of various components. Pre-Installed components for the PicoDLynx™ - Trim resistor R6, input filtering [(0.047uF,16V), (0.1uF, 16V), (2x22uF,16V),(470uF,16V)], Output filtering [(0.047uF,16V), (0.1uF, 16V), (2x22uF,16V)], R_{SENSE} resistors, R_7 & R_{10} = 0 Ohms, R_6 =20K and some test points.

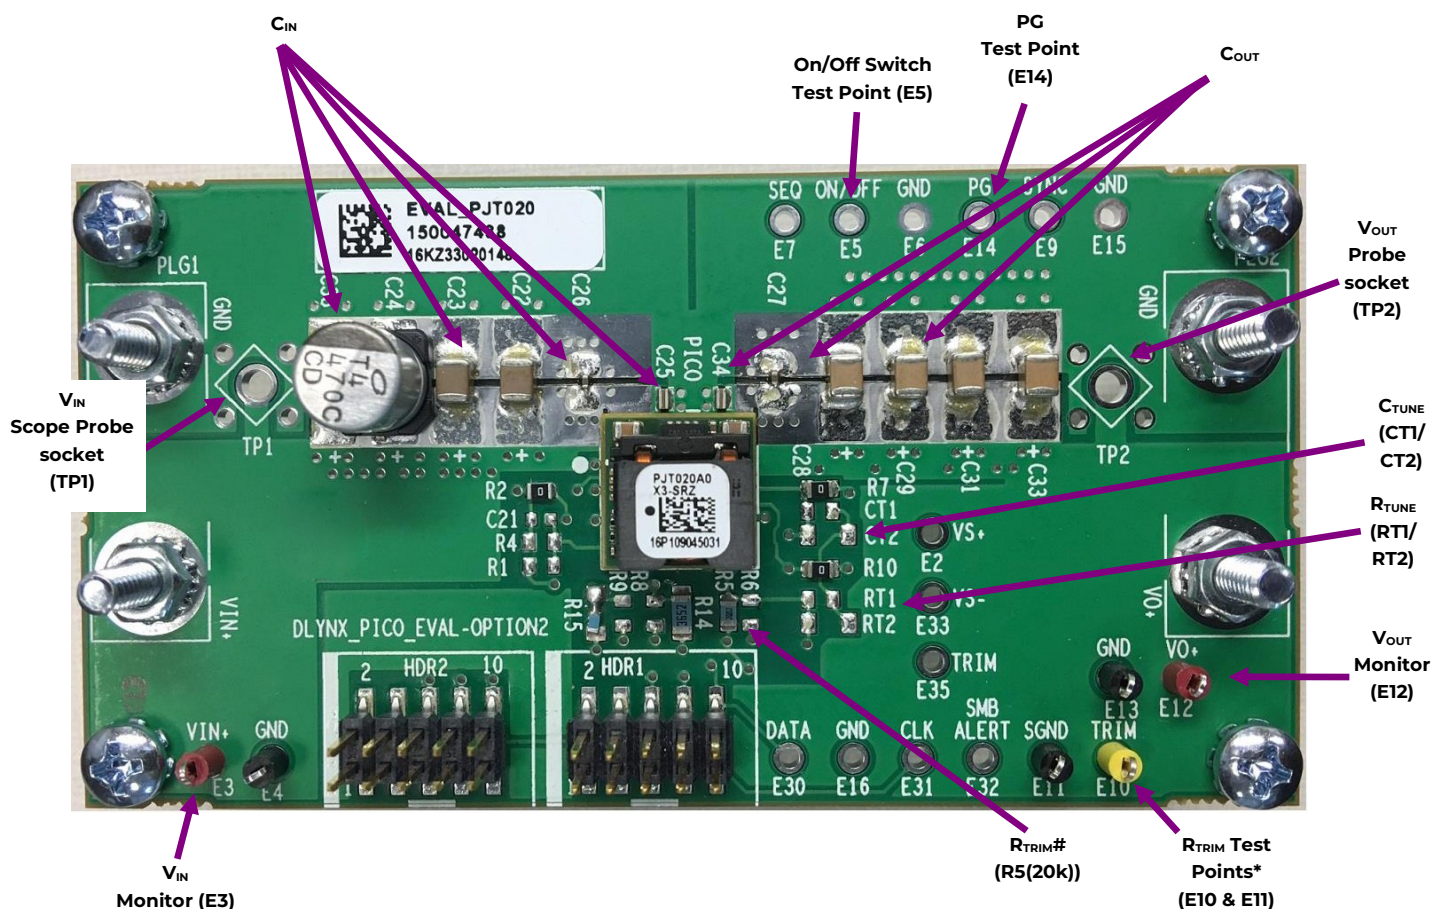


Figure 2. Power and Analog Signal Interface for the PJT020 Eval Board

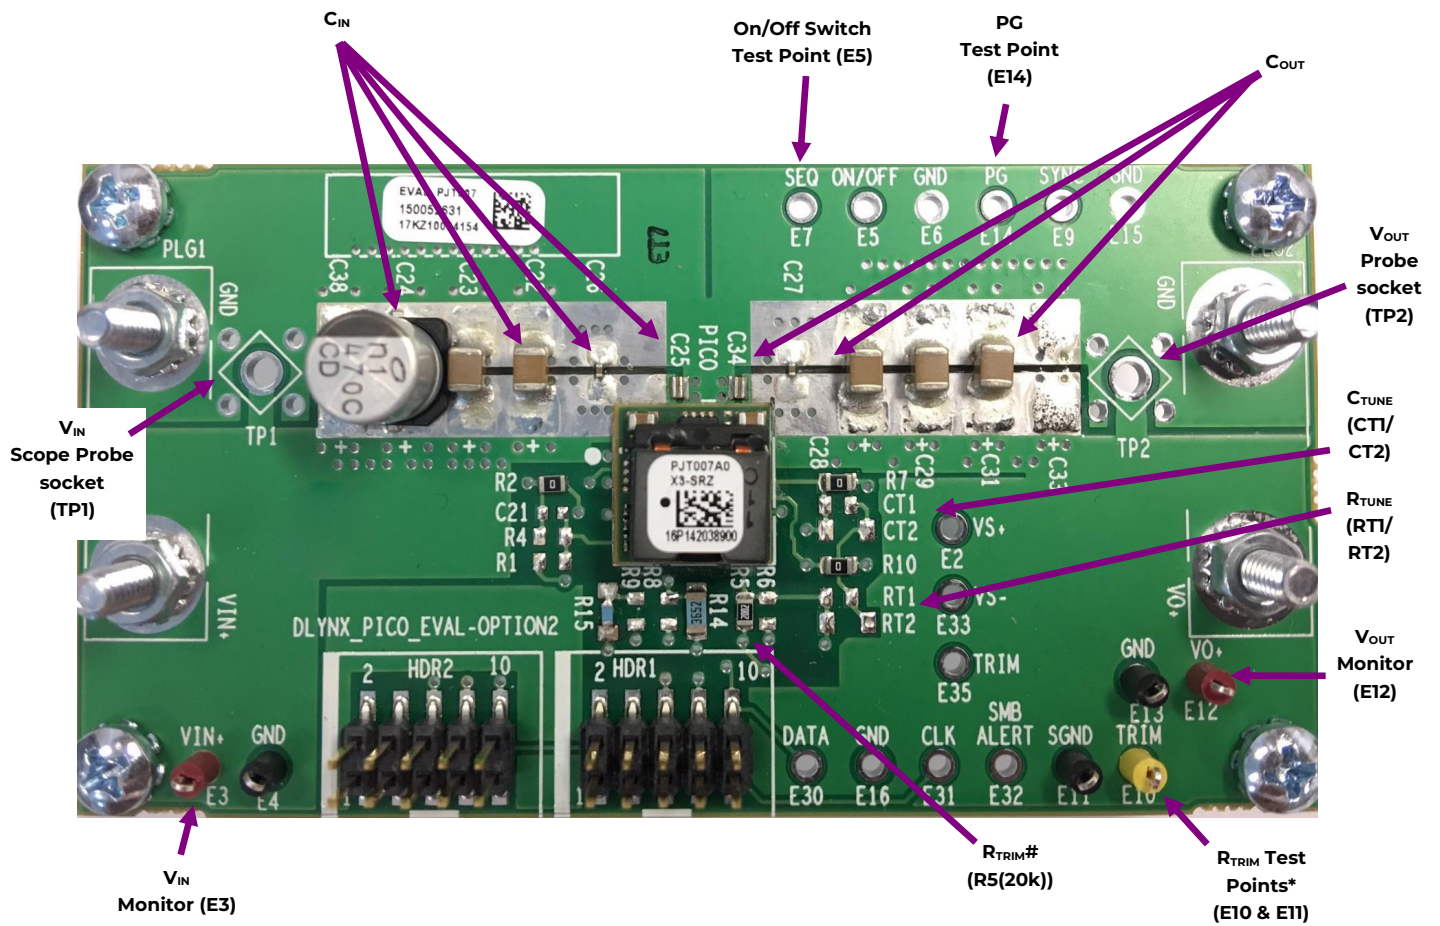


Figure 2. Power and Analog Signal Interface for the PJT020 Eval Board

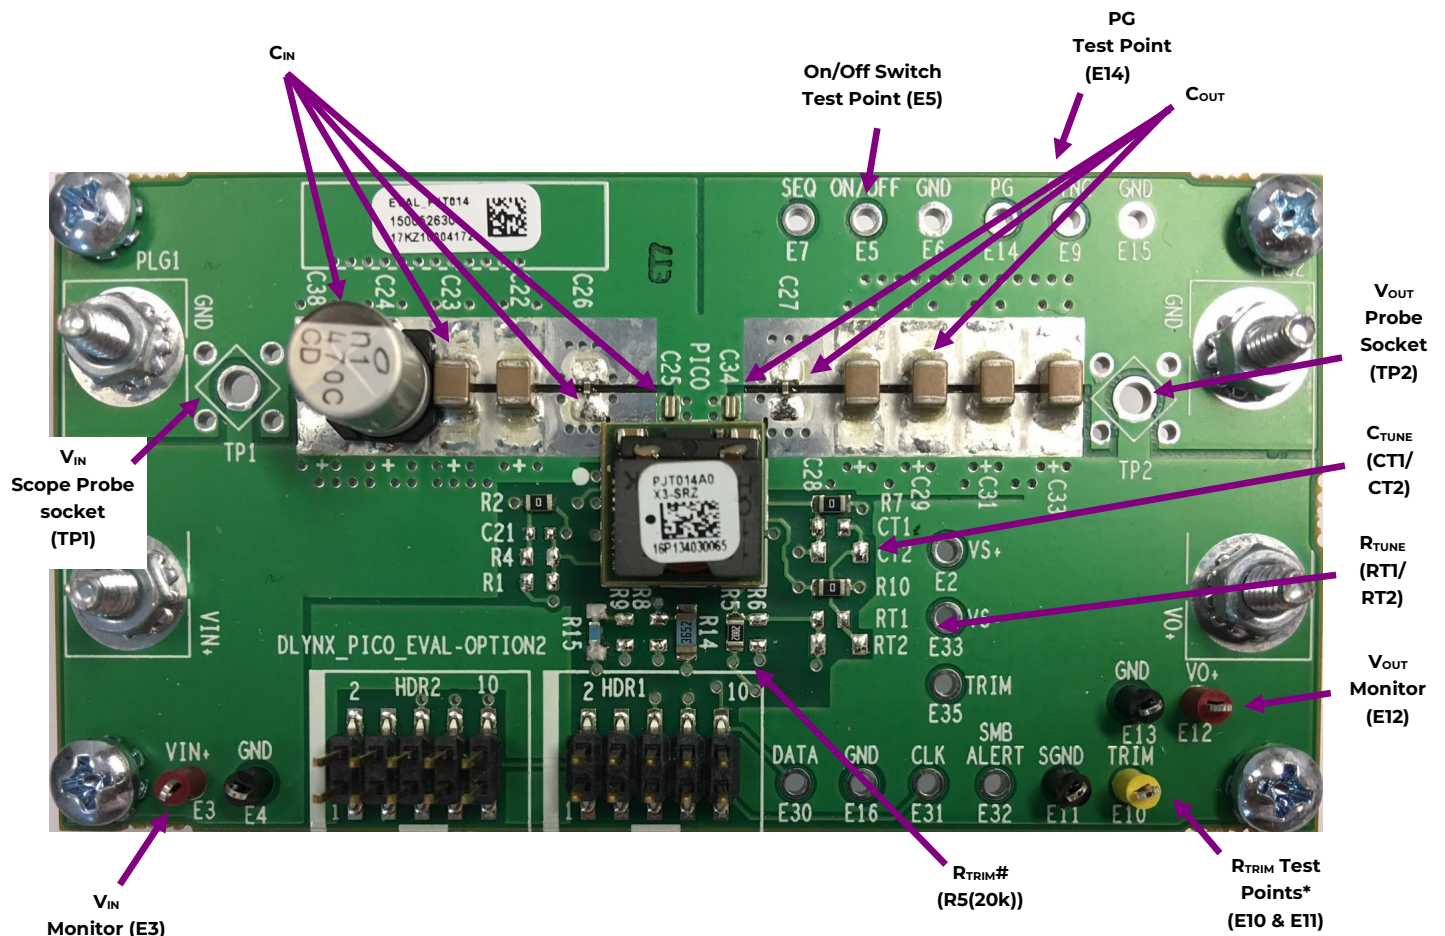


Figure 2. Power and Analog Signal Interface for the PJT020 Eval Board

* The evaluation board comes with preinstalled ADDR1 resistor, R14=36.5K and ADDR0 resistor, R15=53.6K. These values correspond to Octal digits “3 4” equivalent to HEX number “1C” (equivalent to 28 decimal). Please refer to the data sheet for additional details.

** HDR1/HDR2 allow the unit on the Eval board to interface (via 10 pin Ribbon Cable) with another unit on a different Eval Board and/or to OmniOn’s “USB Interface Adapter” module. For further details, please refer to the OmniOn document, “Digital Power Insight™ User Manual”.

Note1: The red wire on the ribbon cable should be aligned to Pin 1 (left side) of the HDR1 or HDR2 connectors. Note2: Headers and Ribbon Cable Assembly details:

Part Description (HDR1 & HDR2): 10-Pin Dual Row Male Pin Header, SMT

e.g. FCI P/N: 95157-210 (Digi-Key P/N: 95157-210-ND) or Molex P/N: 0015910100

Part Description: IDC Ribbon Cable Assembly

e.g.: 3M P/N: M3DDA-1018J (Digi-Key P/N: M3DDA-1018J-ND) or Molex P/N: 111062-0

Contact Us

For more information, call us at

1-877-546-3243 (US)

1-972-244-9288 (Int'l)

OmniOn Power Inc.

601 Shiloh Rd.
Plano, TX USA

omnionpower.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. OmniOn Power does not accept any responsibility for errors or lack of information in this document and makes no warranty with respect to and assumes no liability as a result of any use of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of OmniOn Power. This document does not convey license to any patent or any intellectual property right. Copyright© 2023 OmniOn Power Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[OmniOn Power:](#)

[EVAL_PJT014](#)