





Fiber Optic Connectors

How To Order: Military QPL

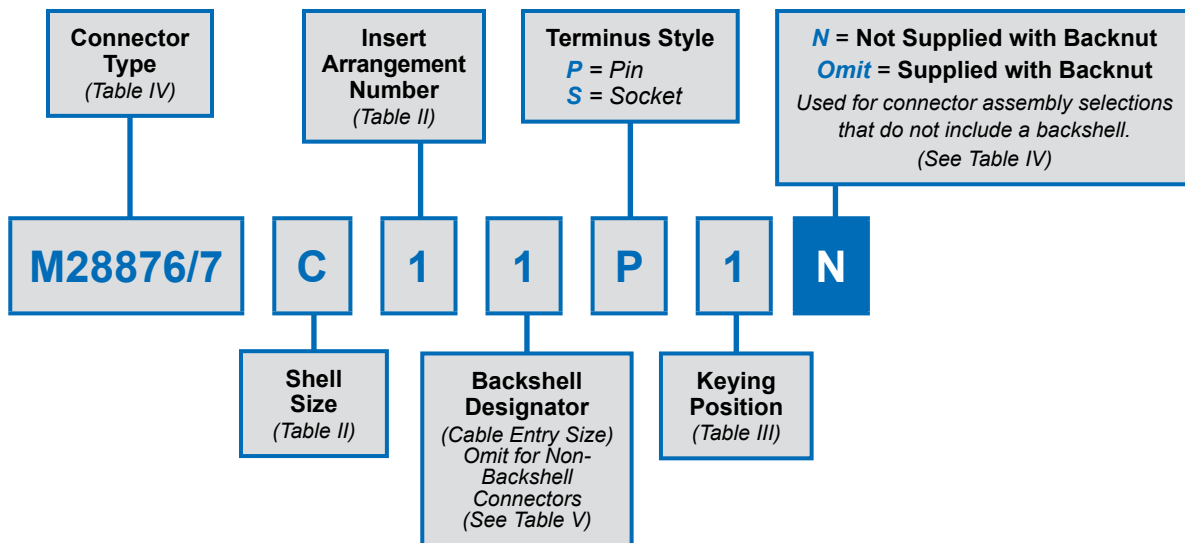

How To Order: Glenair Commercial

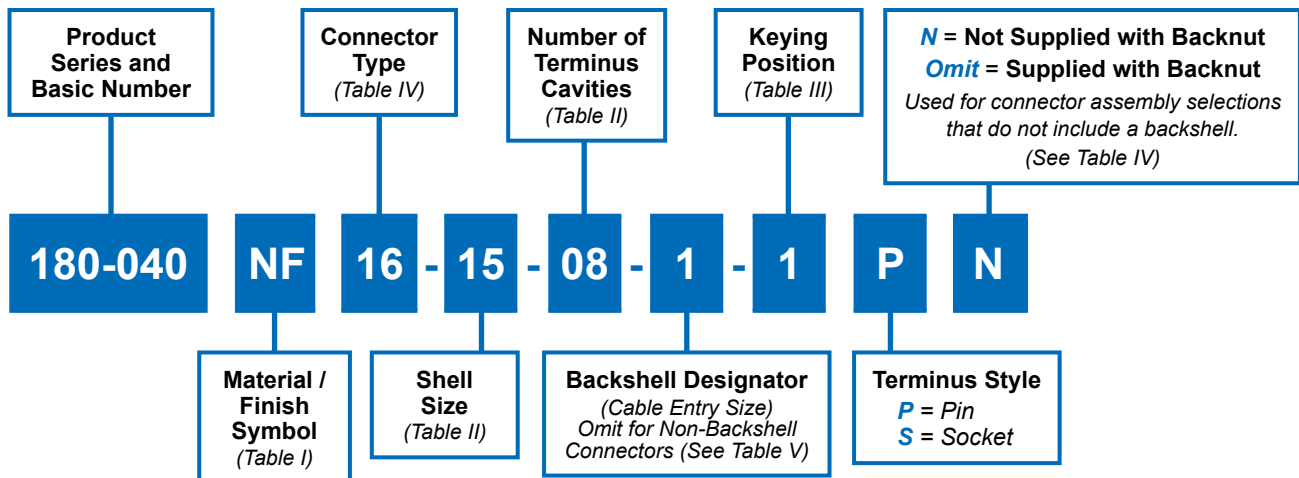

MIL-PRF-28876 Fiber Optic Connectors M28876/1 through /14 180-040



Table I: Shell Finish

Sym	Material	Finish
NF	Aluminum Alloy	Cadmium Plate, Olive Drab (1000 Hrs. Salt Spray)

Table III: Keying Position

Shell Size	Keying Position	A°	B°	C°	D°
11 and 13	0*	-	-	-	-
	1	95	141	208	236
	2	113	156	182	292
	3	90	145	195	252
	4	53	156	220	255
	5	119	146	176	298
	6	51	141	184	242
15 and 23	0*	-	-	-	-
	1	80	142	196	293
	2	135	170	200	310
	3	49	169	200	244
	4	66	140	200	257
	5	62	145	180	280
	6	79	153	197	272
*0 indicates universal keying arrangement and is available on commercial equivalent plug connector only.					

Table II: Shell Size and Insert Arrangement

Mil-Spec		Commercial	
Shell Size	Insert Arrangement	Shell Size	Number of Cavities
A	1	11	02
B	1	13	04
C	2	15	06
	1		08
F	2	23	18
	1		31

Table IV: Connector Type

Connector Type	Backshell Type	MIL-Spec	Commercial
Wall Mount Receptacle	None	M28876/1	03
	Straight	M28876/2	13
	45°	M28876/3	23
	90°	M28876/4	33
In-Line Receptacle	Straight	M28876/5	15
Plug	None	M28876/6	06
	Straight	M28876/7	16
	45°	M28876/8	26
	90°	M28876/9	36
Jam Nut Receptacle	None	M28876/11	04
	Straight	M28876/12	14
	45°	M28876/13	24
	90°	M28876/14	34

Table V: BACKSHELL DESIGNATOR

Backshell Designator	Max Allowable Cable Diameter by Shell Size			
	A (11)	B (13)	C (15)	F (23)
1	.250 (6.4)	.285 (7.2)	.500 (12.7)	.866 (22.0)
2	.346 (8.8)	.346 (8.8)	.250 (6.4)	1.000 (25.4)
3		.453 (11.5)	.375 (9.5)	.600 (15.2)

Material and Finish

A. External Hardware: See Table I
B. Internal Hardware: Aluminum Alloy/
Chem Film, Stainless Steel/Passivate
C. Misc. Hardware: Stainless Steel/
Passivate
D. Insert: Aluminum Alloy/Anodize
E. Seals: Fluorosilicone
F. Consult factory for alternate materials
and finishes.

Specifications

Backnut retained using thread-locking
compound.
Operating Temperature Range: -55° to
+125°C.

Tools, Accessories and Assembly Notes

Termini (Not Supplied with Connector):
M29504/14 - Pin terminus, MIL-Spec
M29504/15 - Socket Terminus, MIL-Spec
M29504/3 - Dummy Terminus, MIL-Spec
181-039 - Pin Terminus, MIL-Spec Style
181-040 - Socket terminus, MIL-Spec
Style
181-051 - Dummy Terminus MIL-Spec
Style
Consult factory for appropriate
termination and assembly tools/
procedures.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[180-040NF06-15-08-1PN](#) [180040NF04-15-08-3S](#) [180040NF06-15-06-1PN](#) [180040M03-11-02-1S](#) [180040MT06-1304-1PN](#) [180040MT04-1304-2S](#) [180040MT06-15-08-1PN](#) [180-040MT04-15-08-1S](#) [180-040MT04-13-04-1S](#) [180-042NF06-15-06-1L](#) [180-040NF04-15-06-1S](#) [180-040NF06-15-06-1PN](#) [180-040MT04-13-04-2S](#) [180-040MT03-15-08-1PN](#) [180-040NF16-15-08-1-1P](#)