

620-004
Backshell Accessory - 90° Strain Relief
Rotatable Coupling



62

**CONNECTOR
DESIGNATOR
A-F-L-H-S
ROTATABLE
COUPLING**

620 A A 004 M 16

Product Series ——— 620

Connector Designator ——— A A

Angle and Profile ——— 004
A = 90°

Basic Part No. ——— M 16

Shell Size (Table III) ——— 16

Finish (Table II) ———

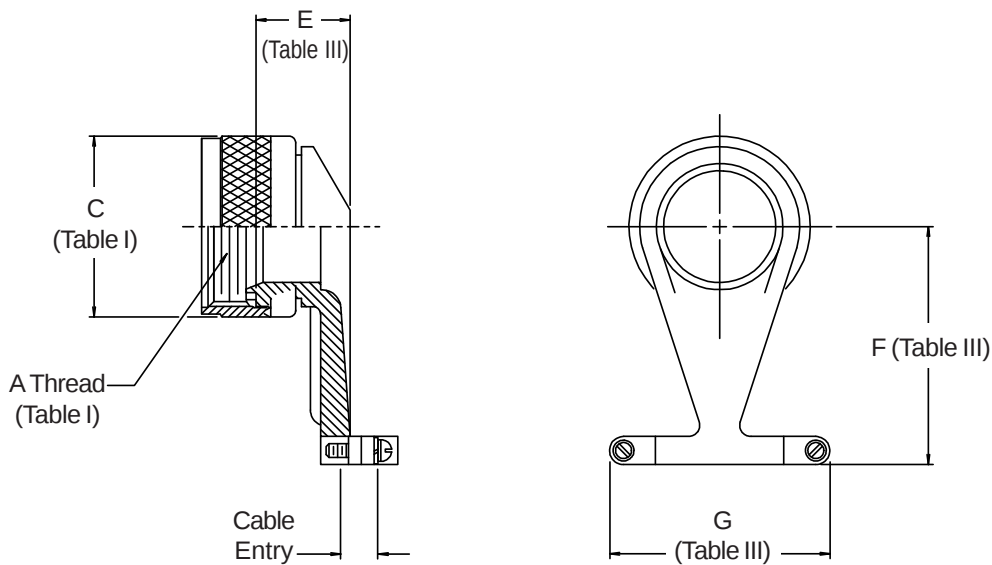


TABLE III: CABLE ENTRY

Shell Size		Conn. Desig.		E		F		G		H Cable Entry			
A,F,L	H									Closed		Open	
08	09	.450	(11.4)	.780	(19.8)	.750	(19.1)	.125	(3.2)	.250	(6.4)		
10	11	.450	(11.4)	.890	(22.6)	.750	(19.1)	.156	(3.7)	.375	(9.5)		
12	13	.450	(11.4)	1.030	(26.2)	.937	(23.8)	.188	(4.8)	.437	(11.1)		
14	15	.450	(11.4)	1.220	(31.0)	1.015	(25.8)	.218	(5.5)	.562	(14.3)		
16	17	.450	(11.4)	1.280	(32.5)	1.125	(28.6)	.250	(6.4)	.625	(15.9)		
18	19	.480	(12.2)	1.370	(34.8)	1.188	(30.2)	.312	(7.9)	.750	(19.1)		
20	21	.480	(12.2)	1.560	(39.6)	1.312	(33.3)	.375	(9.5)	.875	(22.2)		
22	23	.480	(12.2)	1.750	(44.5)	1.437	(36.5)	.406	(10.3)	.937	(23.8)		
24	25	.480	(12.2)	1.810	(46.0)	1.562	(39.7)	.562	(14.3)	1.000	(25.4)		

1. Cable Entry is defined as the accommodation entry for the wire bundle or cable. Dimensions are not intended for inspection criteria.
2. Metric dimensions (mm) are indicated in parentheses.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[620FA004NF12](#) [620AA046B20](#) [620AS048MT22](#)