



M12 A-coded 3-pole, male straight connector



Loading-Plan:

1	brown
3	blue
4	black

- Protection level: IP67
- Temperature range: -25°C ... +80°C

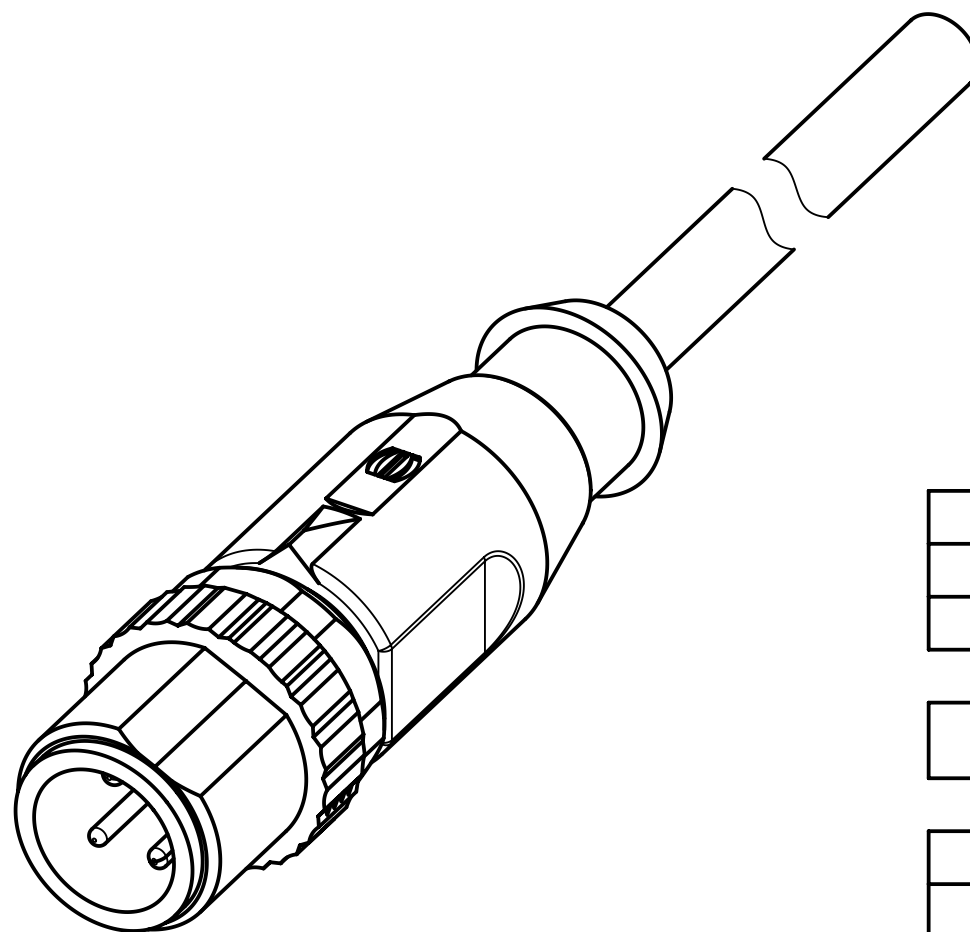



length in "1m" step	40	XXX=400
	39	XXX=390
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 40	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

Part no.	213484003XXXXX
----------	----------------

Type of cable	XX
PVC grey, 3x0.34mm <sup>2</sup>	XX=83
PUR black, 3x0.34mm <sup>2</sup>	XX=90

		All Dimensions in mm Original Size DIN A3		Scale 2:1		Free size tol.		Ref.							
								Sub.							
		All rights reserved		Created by MUNTEANV		Inspected by AVRAM		Standardisation HOFFMANN		Date 2015-06-18		State Final Release			
		Department EC PD - RO		Title M12 A-coded Cable Assembly								Doc-Key / ECM-Nr. 100578777/UGD/009/B 500000090458			
HARTING Electronics GmbH				Type TB		Number 213484003XXXXX						Rev. B		Pag. 1/	
D-32339 Espelkamp															

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[21348400390010](#) [21348400390050](#)