



DIN power female connector - NFF

RoHS
compliant

General information

Design	IEC 60603-2	types: MH 24+7 female
No. of contacts	Signal: 24	Power: 7
Contact spacing	5,08 mm / 3,81 mm / 2,54 mm	
Test voltage	Signal: 1550V	Power: 3100V
Contact resistance	Signal: max. 15mOhm for wirewrap and solder	Power: max. 8mOhm
Insulation resistance	min. 10 ¹⁰ Ohm	
Working current	Signal: 6A at 20°C	Power: 15A at 20°C
Temperature range	-55°C ... +125°C	
Termination technology	solder pins, wirewrap, crimp	
Clearance	Signal: min. 1,6 mm	Power: min. 4,5 mm
Creepage	Signal: min. 3,0 mm	Power: min. 8,0 mm
Insertion and withdrawal force	max. 85N	
Mating cycles	- PL1 acc. to IEC 60603-2 =>	500 mating cycles
	- PL2 acc. to IEC 60603-2 =>	400 mating cycles
	- PL3 acc. to IEC 60603-2 =>	50 mating cycles
RoHS - compliant	Yes	
Leadfree	Yes	
Hot plugging	No	

Insulator material

Material	PA (Polyamid, glass fiber reinforcement 25%)
Colour	RAL 7035 (light grey)
UL classification	UL 94-V0
Material group acc. to IEC 60664-1	II (400 \leq CTI $<$ 600)
NFF classification	I2, F1


Contact material

Contact material	Copper alloy	
Plating termination zone	Signal: Sn over Ni for solder & wirewrap	Power: Ag
Plating contact zone	Signal: Au over Ni	Power: Ag

Derating diagram acc. to IEC 60512-5 (Current carrying capacity)

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures
according to DIN IEC 60512-5

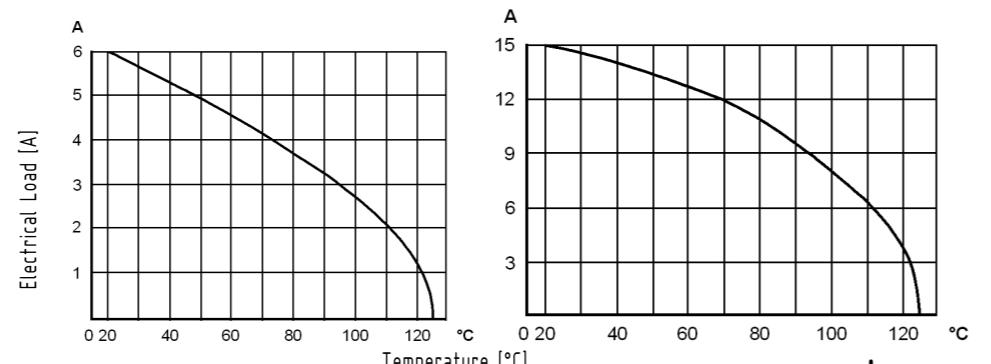


Soldering instructions

The connectors should be protected when being soldered in a dip, flow or film soldering bath. Otherwise, they might become contaminated as a result of soldering operations or deformed as a result of overheating.


(1) For prototypes and short runs protect the connectors with an industrial adhesive tape, e.g. Tesaband 4331 (www.tesa.de). Cover the underside of the connector moulding and the adjacent parts of the PCB as well as the open sides of the connector. This will prevent heat and gases of the soldering apparatus from damaging the connector. About 140 + 5 mm of the tape should suffice.

(2) For large series a jig is recommended. Its protective cover with a fast action mechanical locking device shields the connectors from gas and heat generated by the soldering apparatus. As an additional protection a foil can be used for covering the parts that should not be soldered.

Cross section of solder pins

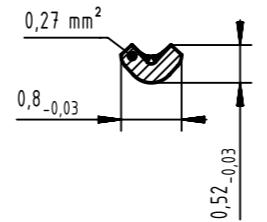

Cross section of wirewrap posts




Installation of crimp contacts

Fitting the crimp contacts

After crimping the wires onto the contacts with the help of a crimping tool or an automatic crimping machine the contacts should be correctly oriented and inserted into the cavities of the connector moulding in the required configuration. They snap into position and are firmly held in place. A light pull on the wire assures the correct tensile strength of the contact. When using stranded wires with a gauge below 0.37 mm² an insertion tool is necessary.

Removing the crimp contacts

The removal tool is inserted into a slot on the side of the respective crimp cavity. This action compresses the contact retaining spring therefore the contact can then be easily withdrawn using a light pull on the wire. This action will cause no damage to the contact/wire which can be repositioned/refitted as necessary. The drawing demonstrates the crimp removal procedure (max. 5x).

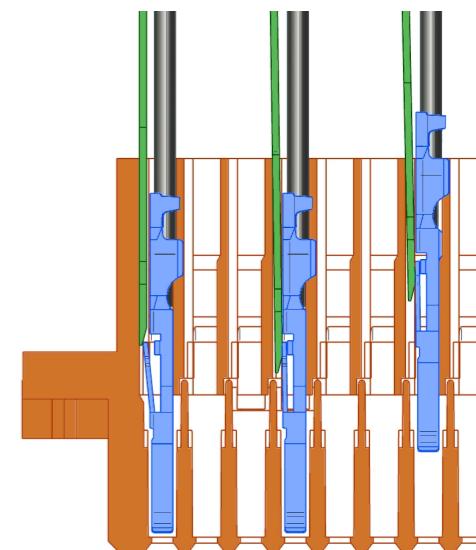

	All Dimensions in mm Original Size DIN A3	Scale 1:1	Free size tol.			Ref.		
						Sub.		
	All rights reserved	Created by KAHLERK			Inspected by TADJE	Standardisation HOFFMANN		
						Date 2017-02-27		
		Title DIN power female connector - NFF			State Final Release			
	HARTING Electronics GmbH			Doc-Key / ECM-Nr. 100580799/UGD/000/A 500000115668				
	Type DS	Number 09062120002			Rev.	A		
					Page	1/1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09062312881222](#)