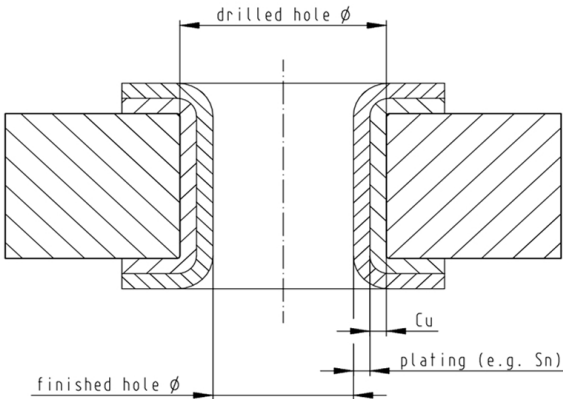

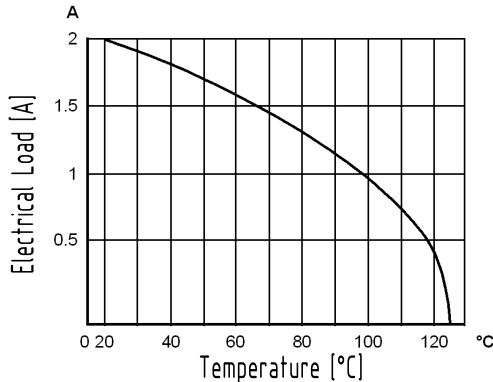


1		2		3		4		5		6		7		8																																																																																												
A			DIN signal male connector with special contacts				RoHS compliant 		Recommended configuration of plated through holes for press-in termination						A																																																																																											
	General information																																																																																																									
B	<table border="1"> <tr><td>Design</td><td>IEC 60603-2</td><td>types: M invers male</td></tr> <tr><td>No. of contacts (signal+special)</td><td>78+2, 60+4, 42+6, 24+8, 6+10</td><td></td></tr> <tr><td>Contact spacing</td><td>2,54 mm for signal contacts</td><td>7,62 mm for special contacts</td></tr> <tr><td>Test voltage</td><td>1000V</td><td></td></tr> <tr><td>Contact resistance</td><td>max. 20mOhm for crimp termination max. 15mOhm for wire wrap</td><td></td></tr> <tr><td>Insulation resistance</td><td>min. 10¹⁰Ohm</td><td></td></tr> <tr><td>Working current</td><td>2A at 20°C (see derating diagram) for signal contacts for special contacts refer to corresponding data sheet</td><td></td></tr> <tr><td>Temperature range</td><td>-55°C ... +125°C -40°C ... +105°C</td><td>for press-in connectors (due to limitations of PCB material)</td></tr> <tr><td>Termination technology</td><td>solder pins, press-in, wirewrap</td><td></td></tr> <tr><td>Clearance & creepage distance</td><td>min. 1,2mm</td><td></td></tr> <tr><td>Insertion and withdrawal force without special contacts</td><td>6pole max. 6N 24pole max. 23N</td><td>42pole max. 40N 60pole max. 57N 78pole max. 74N</td></tr> <tr><td>Mating cycles</td><td>acc. to performance level, see table below</td><td></td></tr> <tr><td>UL file</td><td>E102079</td><td></td></tr> <tr><td>RoHS - compliant</td><td>Yes</td><td></td></tr> <tr><td>Leadfree</td><td>Yes</td><td></td></tr> <tr><td>Hot plugging</td><td>No</td><td></td></tr> </table>		Design			IEC 60603-2	types: M invers male	No. of contacts (signal+special)	78+2, 60+4, 42+6, 24+8, 6+10						Contact spacing	2,54 mm for signal contacts	7,62 mm for special contacts	Test voltage	1000V		Contact resistance	max. 20mOhm for crimp termination max. 15mOhm for wire wrap		Insulation resistance	min. 10 ¹⁰ Ohm		Working current	2A at 20°C (see derating diagram) for signal contacts for special contacts refer to corresponding data sheet		Temperature range	-55°C ... +125°C -40°C ... +105°C	for press-in connectors (due to limitations of PCB material)	Termination technology	solder pins, press-in, wirewrap		Clearance & creepage distance	min. 1,2mm		Insertion and withdrawal force without special contacts	6pole max. 6N 24pole max. 23N	42pole max. 40N 60pole max. 57N 78pole max. 74N	Mating cycles	acc. to performance level, see table below		UL file	E102079		RoHS - compliant	Yes		Leadfree	Yes		Hot plugging	No								<table border="1"> <tr><td rowspan="3">Tin plated PCB (HAL) acc. to EN 60352-5</td><td>Drilled hole Ø</td><td>1,15±0,025mm</td></tr> <tr><td>Cu</td><td>min. 25 µm</td></tr> <tr><td>Sn</td><td>max. 15µm</td></tr> <tr><td rowspan="3">Chemical tin plated PCB</td><td>plated hole Ø</td><td>0,94 - 1,09mm</td></tr> <tr><td>Drilled hole Ø</td><td>1,15±0,025 mm</td></tr> <tr><td>Cu</td><td>min. 25 µm</td></tr> <tr><td rowspan="5">Gold /Nickel plated PCB</td><td>Sn</td><td>min. 0,8 µm</td></tr> <tr><td>plated hole Ø</td><td>1,00 - 1,10 mm</td></tr> <tr><td>Drilled hole Ø</td><td>1,15±0,025 mm</td></tr> <tr><td>Cu</td><td>min. 25 µm</td></tr> <tr><td>Ni</td><td>3-7 µm</td></tr> <tr><td rowspan="5">Silver plated PCB</td><td>Au</td><td>0,05-0,12 µm</td></tr> <tr><td>plated hole Ø</td><td>1,00 - 1,10 mm</td></tr> <tr><td>Drilled hole Ø</td><td>1,15±0,025 mm</td></tr> <tr><td>Cu</td><td>min. 25 µm</td></tr> <tr><td>Ag</td><td>0,1 - 0,3 µm</td></tr> <tr><td rowspan="4">Copper plated PCB (OSP)</td><td>plated hole Ø</td><td>1,00 - 1,10 mm</td></tr> <tr><td>Drilled hole Ø</td><td>1,15±0,025 mm</td></tr> <tr><td>Cu</td><td>min. 25 µm</td></tr> </table>						Tin plated PCB (HAL) acc. to EN 60352-5	Drilled hole Ø	1,15±0,025mm	Cu	min. 25 µm	Sn	max. 15µm	Chemical tin plated PCB	plated hole Ø	0,94 - 1,09mm	Drilled hole Ø	1,15±0,025 mm	Cu	min. 25 µm	Gold /Nickel plated PCB	Sn	min. 0,8 µm	plated hole Ø	1,00 - 1,10 mm	Drilled hole Ø	1,15±0,025 mm	Cu	min. 25 µm	Ni	3-7 µm	Silver plated PCB	Au	0,05-0,12 µm	plated hole Ø	1,00 - 1,10 mm	Drilled hole Ø	1,15±0,025 mm	Cu	min. 25 µm	Ag	0,1 - 0,3 µm	Copper plated PCB (OSP)	plated hole Ø
Design	IEC 60603-2	types: M invers male																																																																																																								
No. of contacts (signal+special)	78+2, 60+4, 42+6, 24+8, 6+10																																																																																																									
Contact spacing	2,54 mm for signal contacts	7,62 mm for special contacts																																																																																																								
Test voltage	1000V																																																																																																									
Contact resistance	max. 20mOhm for crimp termination max. 15mOhm for wire wrap																																																																																																									
Insulation resistance	min. 10 ¹⁰ Ohm																																																																																																									
Working current	2A at 20°C (see derating diagram) for signal contacts for special contacts refer to corresponding data sheet																																																																																																									
Temperature range	-55°C ... +125°C -40°C ... +105°C	for press-in connectors (due to limitations of PCB material)																																																																																																								
Termination technology	solder pins, press-in, wirewrap																																																																																																									
Clearance & creepage distance	min. 1,2mm																																																																																																									
Insertion and withdrawal force without special contacts	6pole max. 6N 24pole max. 23N	42pole max. 40N 60pole max. 57N 78pole max. 74N																																																																																																								
Mating cycles	acc. to performance level, see table below																																																																																																									
UL file	E102079																																																																																																									
RoHS - compliant	Yes																																																																																																									
Leadfree	Yes																																																																																																									
Hot plugging	No																																																																																																									
Tin plated PCB (HAL) acc. to EN 60352-5	Drilled hole Ø	1,15±0,025mm																																																																																																								
	Cu	min. 25 µm																																																																																																								
	Sn	max. 15µm																																																																																																								
Chemical tin plated PCB	plated hole Ø	0,94 - 1,09mm																																																																																																								
	Drilled hole Ø	1,15±0,025 mm																																																																																																								
	Cu	min. 25 µm																																																																																																								
Gold /Nickel plated PCB	Sn	min. 0,8 µm																																																																																																								
	plated hole Ø	1,00 - 1,10 mm																																																																																																								
	Drilled hole Ø	1,15±0,025 mm																																																																																																								
	Cu	min. 25 µm																																																																																																								
	Ni	3-7 µm																																																																																																								
Silver plated PCB	Au	0,05-0,12 µm																																																																																																								
	plated hole Ø	1,00 - 1,10 mm																																																																																																								
	Drilled hole Ø	1,15±0,025 mm																																																																																																								
	Cu	min. 25 µm																																																																																																								
	Ag	0,1 - 0,3 µm																																																																																																								
Copper plated PCB (OSP)	plated hole Ø	1,00 - 1,10 mm																																																																																																								
	Drilled hole Ø	1,15±0,025 mm																																																																																																								
	Cu	min. 25 µm																																																																																																								
	Insulator material								Assembly instructions						C																																																																																											
C	<table border="1"> <tr><td>Material</td><td>PBT (thermoplastics, glass fiber reinforcement 30%)</td></tr> <tr><td>Color</td><td>RAL 7032 (grey)</td></tr> <tr><td>UL classification</td><td>UL 94-V0</td></tr> <tr><td>Material group acc. IEC 60664-1</td><td>IIIa (175 ≤ CTI < 400)</td></tr> <tr><td>NFF classification</td><td>I3, F4</td></tr> </table>		Material	PBT (thermoplastics, glass fiber reinforcement 30%)	Color	RAL 7032 (grey)	UL classification	UL 94-V0	Material group acc. IEC 60664-1	IIIa (175 ≤ CTI < 400)	NFF classification	I3, F4							It is highly recommended to use HARTING press-in tools to ensure a reliable press-in process. Please refer to the catalogue for tools, machines and further information about the press-in process.						C																																																																																	
Material	PBT (thermoplastics, glass fiber reinforcement 30%)																																																																																																									
Color	RAL 7032 (grey)																																																																																																									
UL classification	UL 94-V0																																																																																																									
Material group acc. IEC 60664-1	IIIa (175 ≤ CTI < 400)																																																																																																									
NFF classification	I3, F4																																																																																																									
Contact material								Soldering instructions						D																																																																																												
D	<table border="1"> <tr><td>Contact material</td><td>Copper alloy</td></tr> <tr><td>Plating termination zone signal contacts</td><td>Sn over Ni for solder, Ni for press-in, Ni for wirewrap</td></tr> <tr><td>Plating contact zone signal contacts</td><td>acc. to performance level, see table below</td></tr> <tr><td>Plating special contacts</td><td>refer to corresponding data sheet</td></tr> </table>		Contact material	Copper alloy	Plating termination zone signal contacts	Sn over Ni for solder, Ni for press-in, Ni for wirewrap	Plating contact zone signal contacts	acc. to performance level, see table below	Plating special contacts	refer to corresponding data sheet							The connectors should be protected when being soldered in a dip, flow or film soldering baths. Otherwise, they might become contaminated as a result of soldering operations or deformed as a result of overheating.						D																																																																																			
Contact material	Copper alloy																																																																																																									
Plating termination zone signal contacts	Sn over Ni for solder, Ni for press-in, Ni for wirewrap																																																																																																									
Plating contact zone signal contacts	acc. to performance level, see table below																																																																																																									
Plating special contacts	refer to corresponding data sheet																																																																																																									
<table border="1"> <tr><td colspan="2">performance level</td><td colspan="2">mating cycles</td><td colspan="2">plating contact zone signal contacts</td></tr> <tr> <td colspan="2"></td><td>acc. to IEC 60603-2</td><td>complementary acc. to IEC 60603-2</td><td colspan="2"></td></tr> <tr> <td colspan="2">1</td><td>500</td><td></td><td colspan="2"><i>Au over PdNi over Ni</i></td></tr> <tr> <td colspan="2">2</td><td>400</td><td></td><td colspan="2"><i>Au over PdNi over Ni</i></td></tr> <tr> <td colspan="2">3</td><td>50</td><td></td><td colspan="2"><i>Au over PdNi over Ni</i></td></tr> <tr> <td colspan="2">NM30 (S4)</td><td></td><td>500</td><td colspan="2" rowspan="5">min. 0,76µm (30pinch) noble metal (alloy) over Ni</td></tr> </table>		performance level		mating cycles		plating contact zone signal contacts				acc. to IEC 60603-2	complementary acc. to IEC 60603-2			1		500		<i>Au over PdNi over Ni</i>		2		400		<i>Au over PdNi over Ni</i>		3		50		<i>Au over PdNi over Ni</i>		NM30 (S4)			500	min. 0,76µm (30pinch) noble metal (alloy) over Ni								Cross section of solder terminations						E																																																								
performance level		mating cycles		plating contact zone signal contacts																																																																																																						
		acc. to IEC 60603-2	complementary acc. to IEC 60603-2																																																																																																							
1		500		<i>Au over PdNi over Ni</i>																																																																																																						
2		400		<i>Au over PdNi over Ni</i>																																																																																																						
3		50		<i>Au over PdNi over Ni</i>																																																																																																						
NM30 (S4)			500	min. 0,76µm (30pinch) noble metal (alloy) over Ni																																																																																																						
E	Standard plating options highlighted in <i>italic</i> , other plating options are available on request.														E																																																																																											
									Derating diagram acc. to IEC 60512-5 (Current carrying capacity)						F																																																																																											
F															F																																																																																											
									<table border="1"> <tr> <td>  </td><td>All rights reserved</td><td colspan="2">Created by STORCK</td><td>Inspected by LEHNERT</td></tr></table>		All rights reserved	Created by STORCK		Inspected by LEHNERT																																																																																												
	All rights reserved	Created by STORCK		Inspected by LEHNERT																																																																																																						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09731606903](#) [09731246907](#) [09731426903](#) [09731426974](#) [09731606974](#) [09731786974](#) [09731606907](#)
[09731066903](#) [09731246902](#) [09731246903](#) [09731606991](#) [9731246902](#) [9731606991](#) [09731246991](#) [09731426907](#)
[9731246991](#)