M12 A 4pol m/f st/st shld.

RoHS compliant

Technische Daten:

Bemessungsspannung: IEC 61076-2-101	160 V
Strombelastbarkeit: IEC 61076-2-101	4 A bei 40°C
Isolationswiderstand: IEC 60512	>=100 MΩ
Verschmutzungsgrad: IEC 60664-1	3/2
Schutzart: IEC 60529	IP 67, im verschraubten Zustand
Umgebungstemperatur: EN 60512-11-10 EN 60512-11-4	-25°C ... +80°C -40°C -40°C ... +85°C
Steckzyklen: IEC 60512-9a	>=100

Kabeleigenschaften:

Umgebungstemperatur:	
fest verlegt	-25°C ... +80°C
bewegt	-5°C ... +80°C
Kabel:	TPU, UL 20549, schwarz, 4x0,34mm², Li9Y11Y

Werkstoffe:

Kontakt:	CuZn, Ni b / Au 0,2 gal.
Kontaktträger:	PA, UL 94 V-0
Überwurfmutter /-schraube:	GD-Zn, Ni
Dichtung:	FPM
Griffkörper:	TPU, UL 94 HB, schwarz

Montagedaten:

empfohlenes Drehmoment:	0,6 Nm

male



female



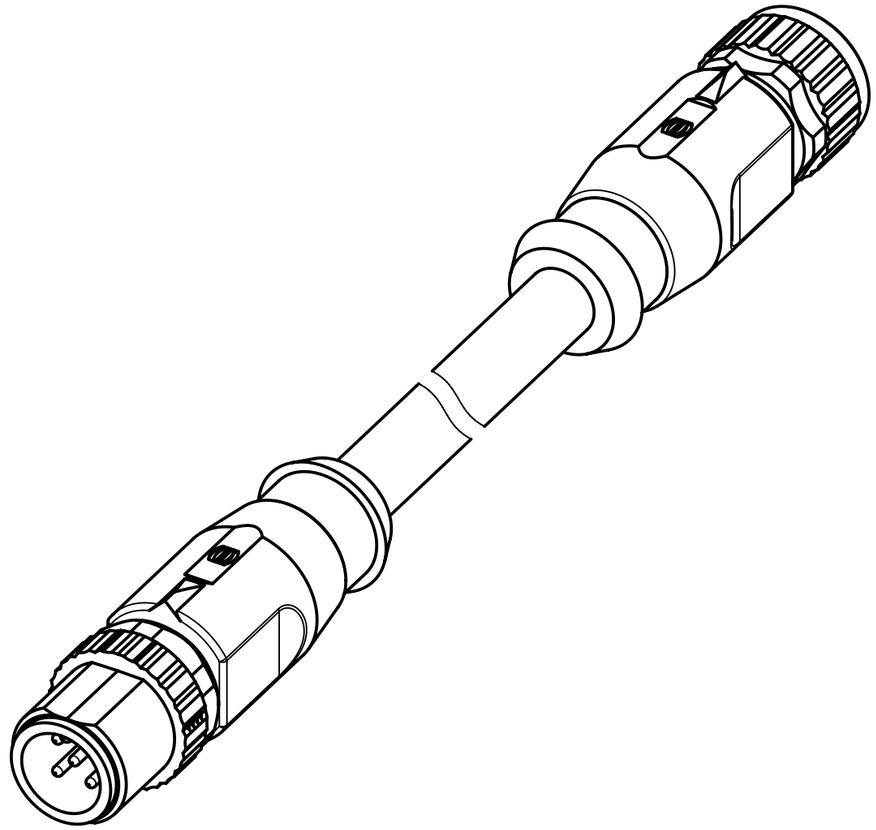

All Dimensions in mm | Tech. Character. | Free size tol. | According to production drawing

All rights reserved

Department	Created by	Inspected by	Standardisation	Date	State
HCS - RO	STOCHECIC Stocheci	COSTEA Costea	MUNTEANV Muntean	2019-03-05	Final Release

Title: M12 A 4pol m/f st/st shld.

Doc-Key / ECM-Nr.: 100803013/UGD/000/A 500000148324

HARTING Customised Solutions
D-32339 Espelkamp

Type: DS | Number: 21347875474XXX | Rev.: A | Page: 1/1

A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:
21347875474010