

5



4

3

2

1



Mating face according to : MIL -C-24308 / DIN 41652 / 75301-802

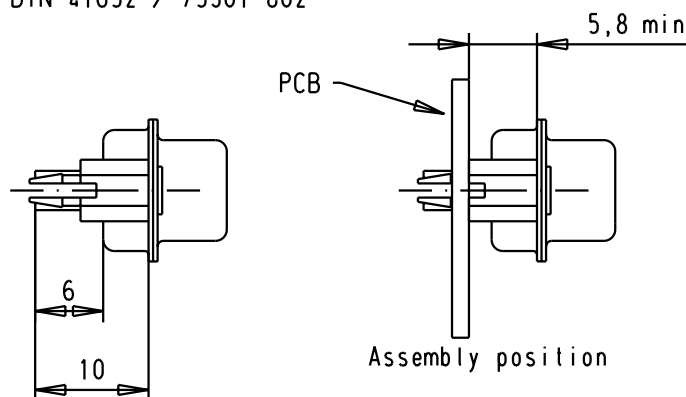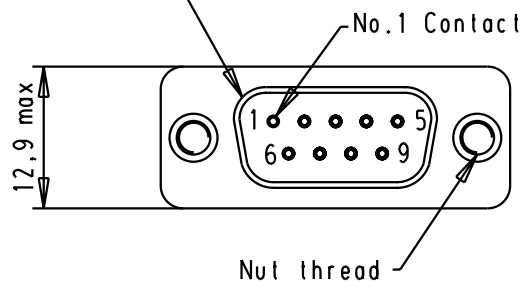


SPECIFICATION

Mating Cycles	200
Capacitance	47pf±20%
Working Voltage	100v
Current Rating	7,5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

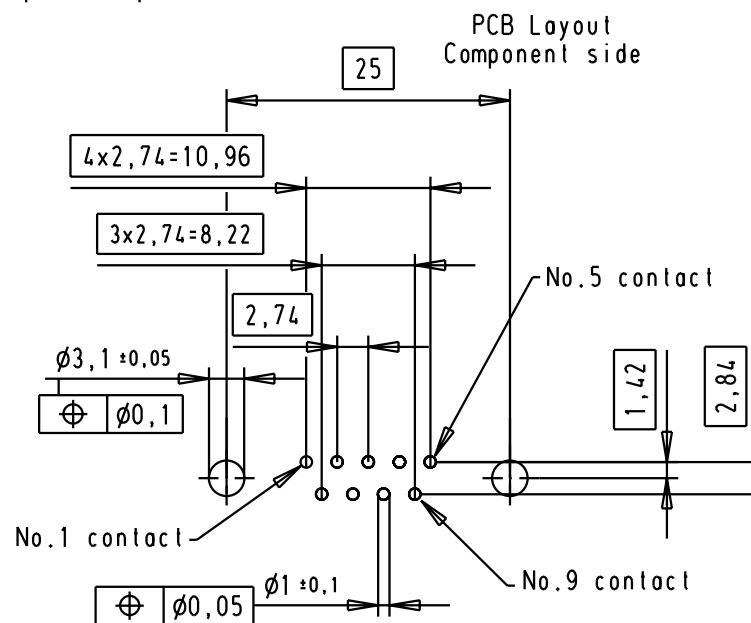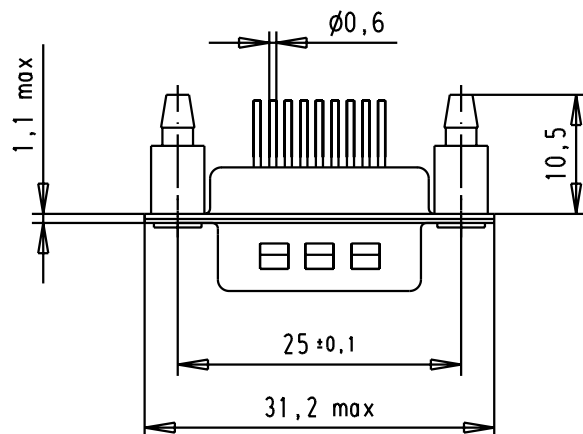

	Dat.	Name
Detail.	8-JUL-02	CV
Insp.		
Stand.		

All Dim. in mm
Orig. Size DIN A 4D-Sub, male, straight,
9 Poles, with turned
solder pin, spacer nut
with clipMo?Mstab/
Scale

1.5:1

09641227216

M3

09641227215

UNC 4-40

31058

8-JUL-02

CV

Part number

Nut thread

Mod.

Dat.

Name

HARTING EURL
F-95972 Paris

Sub.

TB 0964122721x

Blatt/ Page

2 / 3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09641227215](#) [09641227216](#)