

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

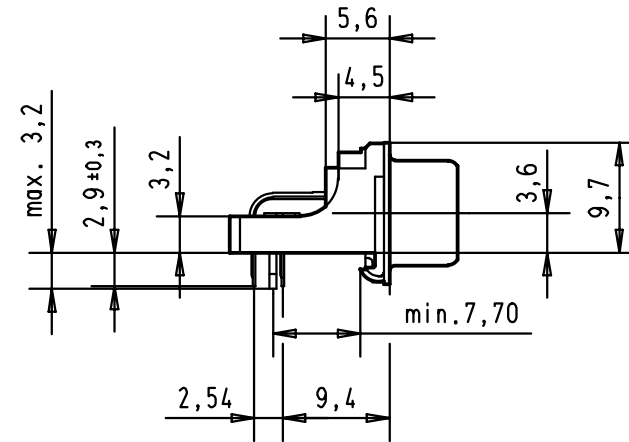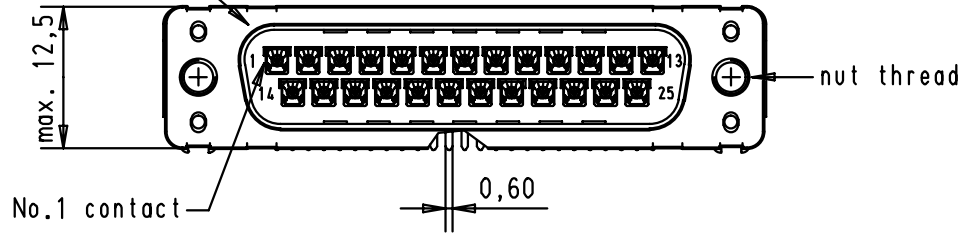


PCB layout hole
component side
(PCB holes plating : Tin)

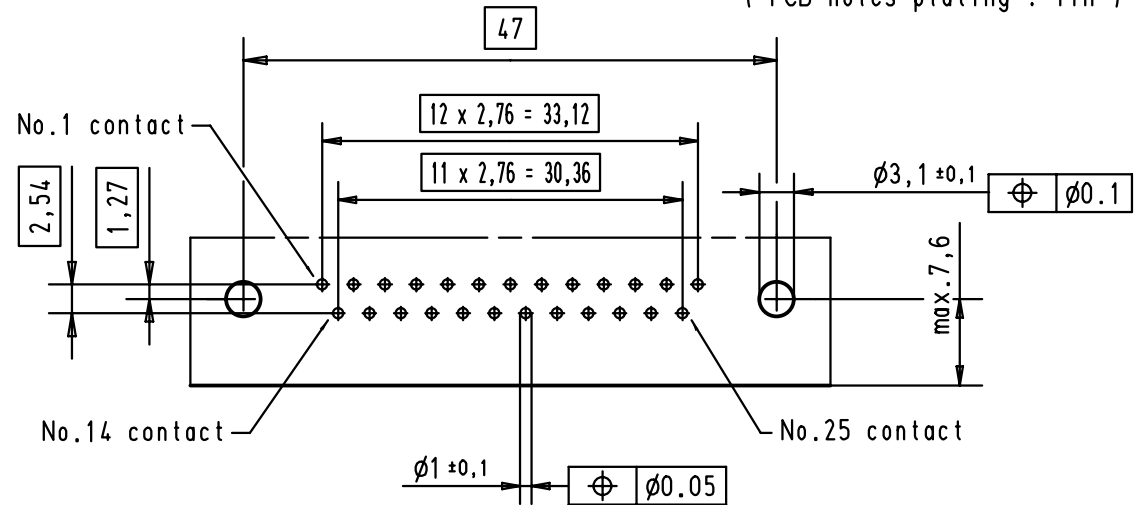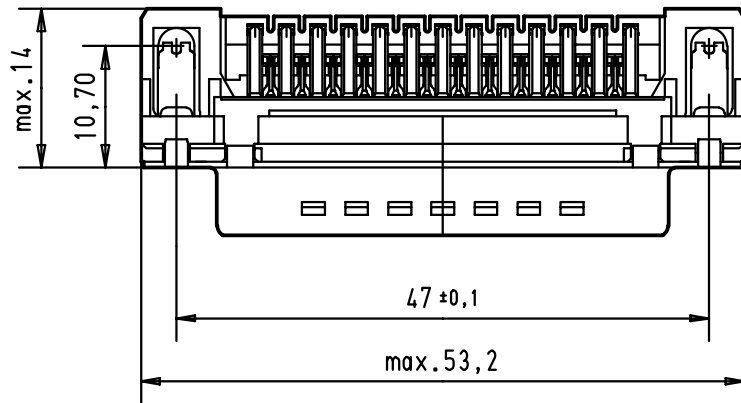

Connector retention and assembling forces on the PCB = 25 / 80 newtons

09 65 362 6815	M3	2			
09 65 362 7815	M3	3			
09 65 362 5815	M3	0.76 µm Au			
09 65 362 6816	4-40 UNC	2			
09 65 362 7816	4-40 UNC	3	29689	03/07/01	AA
09 65 362 5816	4-40 UNC	0.76 µm Au	27960	05/jan/01	ALSPACE
Part number	Nut thread	Performance level	Mod.	Dat.	Name

	Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, low profil angle, 25 poles, with solder pin, nut, grounding board lock.	Maßstab/ Scale 1.5:1
Detail.	05/jan/01	ALSPACE			
Insp.					
Stand.					
HARTING EURL F-95972 Paris				TB 0965362x81x	Blatt/ Page 2 / 6
			Sub.		

09 65 362 5810

Printed board connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	with grounding board lock
flange	hole 3.1 mm
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



The data sheet is up to date
2D files

Typenblatt

Typenblatt

09 65 362 5811
Printed board connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	with grounding board lock
flange	M 3
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



The data sheet is up to date
2D files

Typenblatt

Typenblatt

09 65 362 5812
Printed board connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	with grounding board lock
flange	UNC4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



The data sheet is up to date
2D files

Typenblatt

Typenblatt

09 65 362 5813
Printed board connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	with grounding board lock
flange	with screw lock UNC 4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



The data sheet is up to date
2D files

Typenblatt

Typenblatt

09 65 362 5814
Printed board connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins - low profile
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	with grounding board lock
flange	hole 3.1 mm
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



The data sheet is up to date
2D files

Typenblatt

Typenblatt

09 65 362 5815
Printed board connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins - low profile
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	with grounding board lock
flange	M 3
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



The data sheet is up to date
2D files

Typenblatt

Typenblatt

09 65 362 5816
Printed board connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins - low profile
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	with grounding board lock
flange	UNC4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



The data sheet is up to date
2D files

Typenblatt

Typenblatt

09 65 362 5817
Printed board connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins - low profile
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	with grounding board lock
flange	with screw lock UNC 4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



The data sheet is up to date
2D files

Typenblatt

Typenblatt

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09653625812](#) [09653625811](#)