

5

4


3

2


1

Mating face according to MIL-C-24308 / DIN 41 652 / CECC 75301-802


No. 1 contact

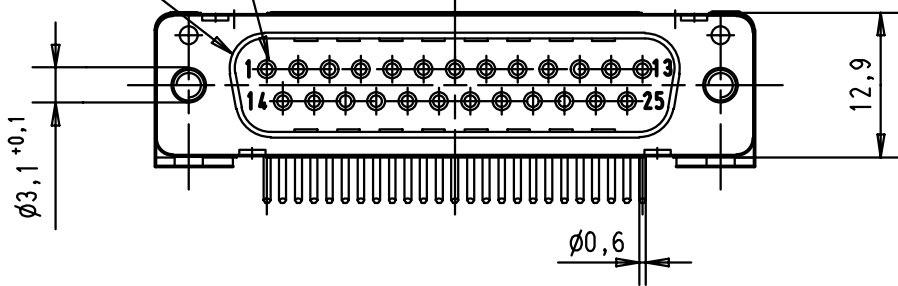


Printed board layout (1,6 ± 0,2 thick)
View component side
(PCB plating = Tin)

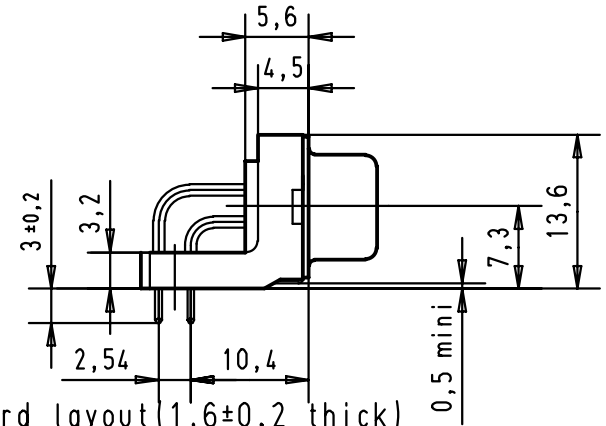

3.1 ± 0.1

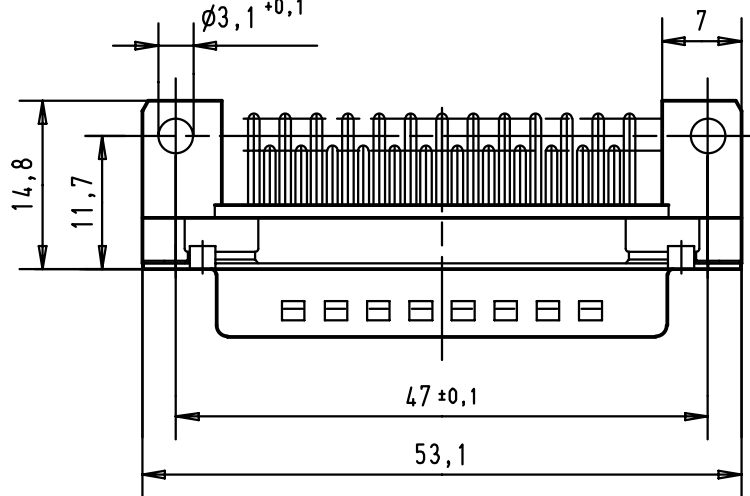

No. 1 contact

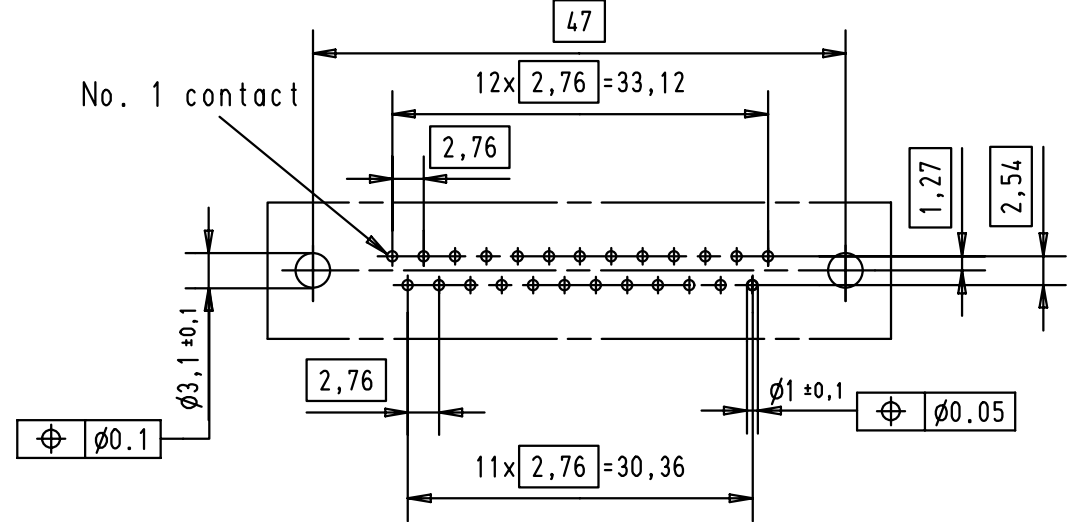

09 66 322 6801

M3

2

09 66 322 7801

M3

3

09 66 322 5801

M3

0,76 µm Au

09 66 322 6802

4-40 UNC

2

09 66 322 7802

4-40 UNC

3

09 66 322 5802

4-40 UNC

0,76 µm Au

29733

23-NOV-01

JB

Part number

nut thread

Performance level

Mod.

Dat.

Name

Dat.

Name

Detail.

23-NOV-01

JB

Insp.

Stand.



All Dim. in mm
Orig. Size DIN A 4

D-Sub male standard 25 poles
with solder pins and nuts

Maßstab/
Scale

1,5:1

HARTING EURL
F-95972 Paris



TB 09 66 322 X80X

Sub.

Blatt/ Page

1

09 66 322 6801
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	without snap-in-clips
Grounding	without grounding board locks
flange	M 3
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 322 5801
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	without snap-in-clips
Grounding	without grounding board locks
flange	M 3
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 322 5802
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	without snap-in-clips
Grounding	without grounding board locks
flange	UNC4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats
2D files

Typenblatt

Typenblatt

09 66 322 6802
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	without snap-in-clips
Grounding	without grounding board locks
flange	UNC4-40
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 322 7801
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	without snap-in-clips
Grounding	without grounding board locks
flange	M 3
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 322 7802
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	25 way
Row pitch	Row separation 2.54 mm
Board fixing	without snap-in-clips
Grounding	without grounding board locks
flange	UNC4-40
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09663225801](#)