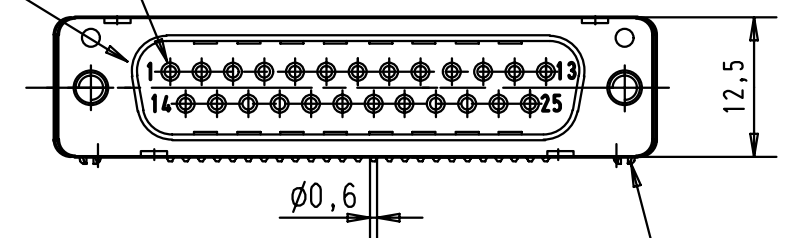
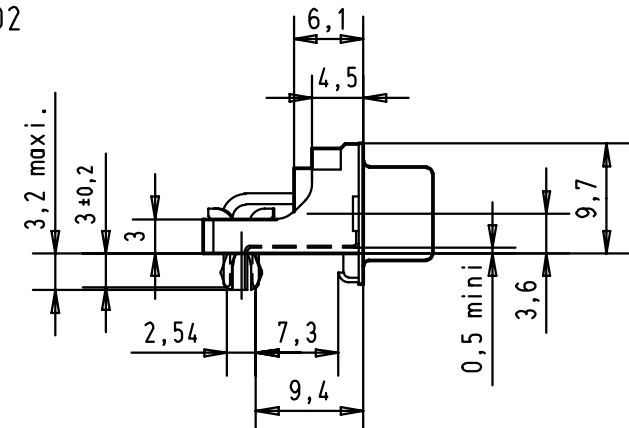
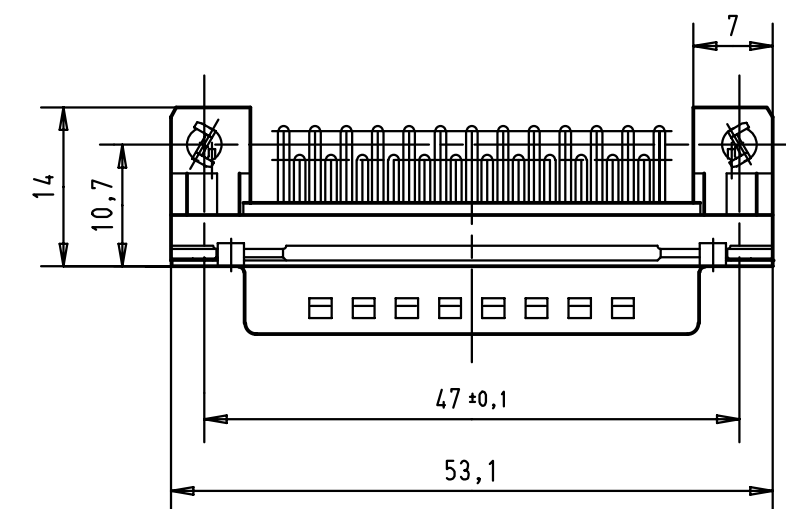
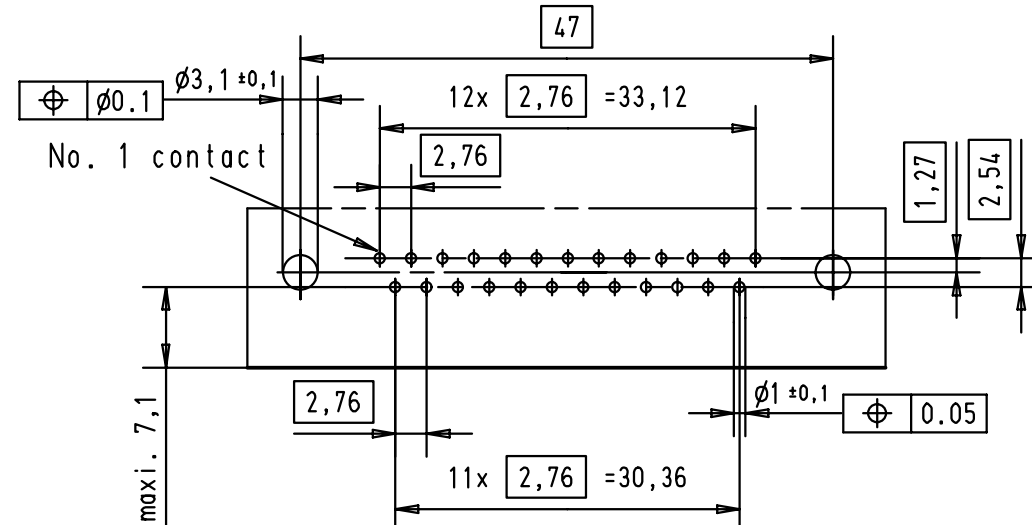


5		4		3		2		1	
Mating face according to MIL-C-24308 / DIN 41 652 / CECC 75301-802									
D									
	No. 1 contact				Printed board layout(1,6±0,2 thick) View component side (PCB plating = Tin)				
C									
B	Mounting force on Printed board : 25 - 80 N								
A	09 66 362 6815	M3	2						
	09 66 362 7815	M3	3						
	09 66 362 5815	M3	0,76 µm Au						
	09 66 362 6816	4-40 UNC	2						
	09 66 362 7816	4-40 UNC	3						
	09 66 362 5816	4-40 UNC	0,76 µm Au	29733	23-NOV-01	JB			
	Part number		nut thread	Performance level	Mod.	Dat.	Name		

09 66 362 6815
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins - low profile
shell	tinned metal shell with dimples
Number of contacts	25 way
Board fixing	with snap-in-clips
Grounding	with grounding board locks
flange	M 3
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 362 5816
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins - low profile
shell	tinned metal shell with dimples
Number of contacts	25 way
Board fixing	with snap-in-clips
Grounding	with grounding board locks
flange	UNC4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 362 5815
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins - low profile
shell	tinned metal shell with dimples
Number of contacts	25 way
Board fixing	with snap-in-clips
Grounding	with grounding board locks
flange	M 3
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats
2D files

Typenblatt

Typenblatt

09 66 362 6816
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins - low profile
shell	tinned metal shell with dimples
Number of contacts	25 way
Board fixing	with snap-in-clips
Grounding	with grounding board locks
flange	UNC4-40
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 362 7815
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins - low profile
shell	tinned metal shell with dimples
Number of contacts	25 way
Board fixing	with snap-in-clips
Grounding	with grounding board locks
flange	M 3
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

09 66 362 7816
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Turned solder pins - low profile
shell	tinned metal shell with dimples
Number of contacts	25 way
Board fixing	with snap-in-clips
Grounding	with grounding board locks
flange	UNC4-40
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09663625816](#)