
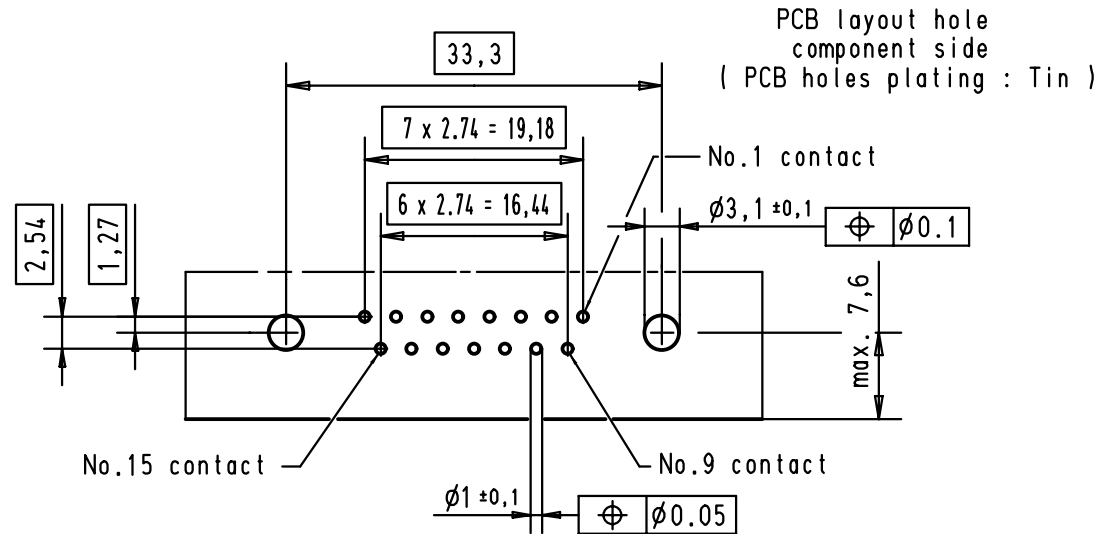
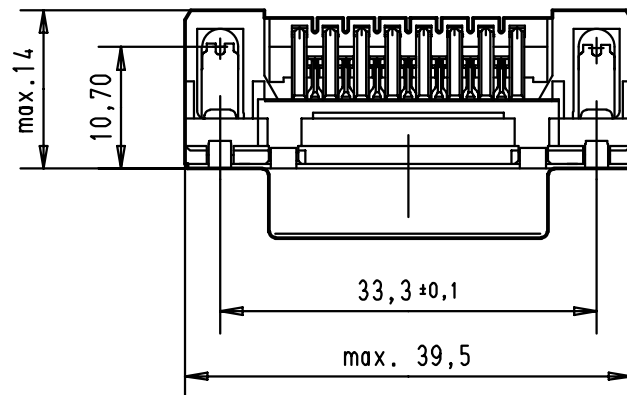
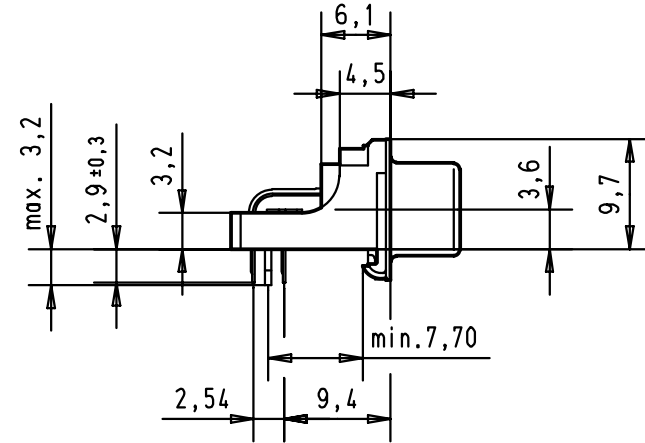


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

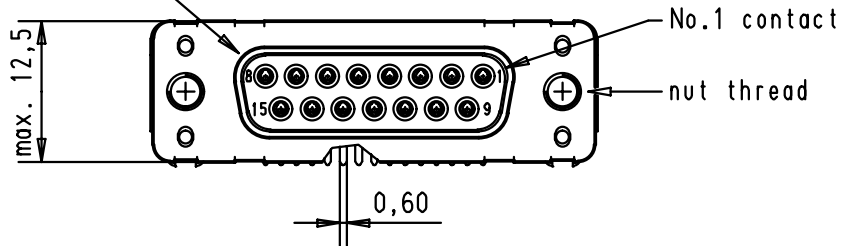

Connector retention and insertion forces on the PCB = 25 / 80 newtons

|                |            |                   |       |            |      |                               |            |      |                                                                                                                               |                                                                                      |                            |
|----------------|------------|-------------------|-------|------------|------|-------------------------------|------------|------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------|
| 09 66 252 6615 | M 3        | 2                 |       |            |      |                               | Dat.       | Name | <br>All Dim. in mm<br>Orig. Size DIN A 4 | D-Sub 15 poles low profil angle female,solder pin with nut and grounding board lock. | Maßstab/<br>Scale<br>1.5:1 |
| 09 66 252 7615 | M 3        | 3                 |       |            |      | Detail.                       | 02/sept/00 | jfb  |                                                                                                                               |                                                                                      |                            |
| 09 66 252 5615 | M 3        | 0.76 µm Au        |       |            |      | Insp.                         |            |      |                                                                                                                               |                                                                                      |                            |
| 09 66 252 6616 | 4-40 UNC   | 2                 | 27961 | 24/nov/00  | jfb  | Stand.                        |            |      |                                                                                                                               |                                                                                      |                            |
| 09 66 252 7616 | 4-40 UNC   | 3                 | 27952 | 26/oct/00  | jfb  | HARTING EURL<br>F-95972 Paris |            |      |                                          | TB 0966252x61x                                                                       | Blatt/ Page<br>2 / 6       |
| 09 66 252 5616 | 4-40 UNC   | 0.76 µm Au        | 27948 | 02/sept/00 | jfb  |                               |            |      |                                                                                                                               |                                                                                      |                            |
| Part number    | Nut thread | Performance level | Mod.  | Dat.       | Name |                               |            |      | Sub.                                                                                                                          |                                                                                      |                            |

09 66 252 6615  
D-Sub - S PCB connector

Other applications

|                    |                                   |
|--------------------|-----------------------------------|
| gender             | female connector, right angled    |
| Termination        | Stamped solder pins - low profile |
| shell              | tinned metal shell                |
| Number of contacts | 15 way                            |
| Row pitch          | Row separation 2.54 mm            |
| Board fixing       | with grounding board locks        |
| flange             | M 3                               |
| Performance level  | Performance level 2               |
| Material           | PBTP                              |

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 252 5616  
D-Sub - S PCB connector

Other applications

|                    |                                   |
|--------------------|-----------------------------------|
| gender             | female connector, right angled    |
| Termination        | Stamped solder pins - low profile |
| shell              | tinned metal shell                |
| Number of contacts | 15 way                            |
| Row pitch          | Row separation 2.54 mm            |
| Board fixing       | with grounding board locks        |
| flange             | UNC4-40                           |
| Performance level  | Performance level S4              |
| Material           | PBTP                              |

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 252 5615  
D-Sub - S PCB connector

Other applications

|                    |                                   |
|--------------------|-----------------------------------|
| gender             | female connector, right angled    |
| Termination        | Stamped solder pins - low profile |
| shell              | tinned metal shell                |
| Number of contacts | 15 way                            |
| Row pitch          | Row separation 2.54 mm            |
| Board fixing       | with grounding board locks        |
| flange             | M 3                               |
| Performance level  | Performance level S4              |
| Material           | PBTP                              |

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats  
2D files

Typenblatt

Typenblatt

09 66 252 6616  
D-Sub - S PCB connector

Other applications

|                    |                                   |
|--------------------|-----------------------------------|
| gender             | female connector, right angled    |
| Termination        | Stamped solder pins - low profile |
| shell              | tinned metal shell                |
| Number of contacts | 15 way                            |
| Row pitch          | Row separation 2.54 mm            |
| Board fixing       | with grounding board locks        |
| flange             | UNC4-40                           |
| Performance level  | Performance level 2               |
| Material           | PBTP                              |

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 252 7615  
D-Sub - S PCB connector

Other applications

|                    |                                   |
|--------------------|-----------------------------------|
| gender             | female connector, right angled    |
| Termination        | Stamped solder pins - low profile |
| shell              | tinned metal shell                |
| Number of contacts | 15 way                            |
| Row pitch          | Row separation 2.54 mm            |
| Board fixing       | with grounding board locks        |
| flange             | M 3                               |
| Performance level  | Performance level 3               |
| Material           | PBTP                              |

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 252 7616  
D-Sub - S PCB connector

Other applications

|                    |                                   |
|--------------------|-----------------------------------|
| gender             | female connector, right angled    |
| Termination        | Stamped solder pins - low profile |
| shell              | tinned metal shell                |
| Number of contacts | 15 way                            |
| Row pitch          | Row separation 2.54 mm            |
| Board fixing       | with grounding board locks        |
| flange             | UNC4-40                           |
| Performance level  | Performance level 3               |
| Material           | PBTP                              |

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09662525615](#)