

5




4

3


2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

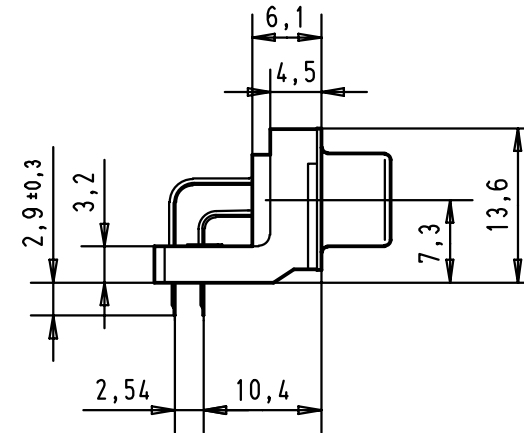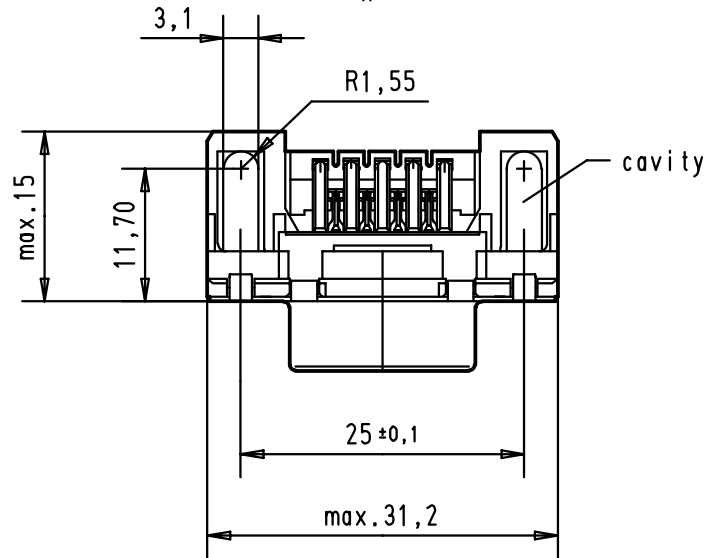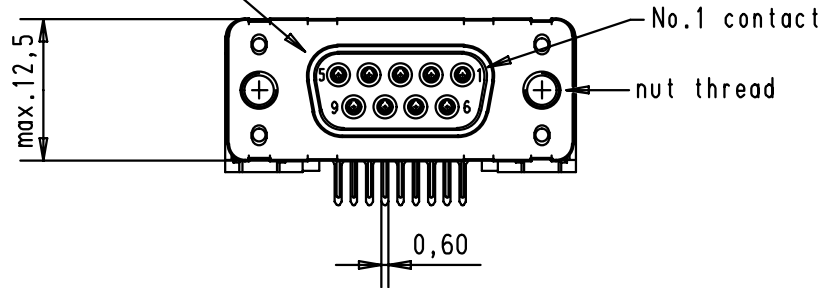


Printed board layout
component side

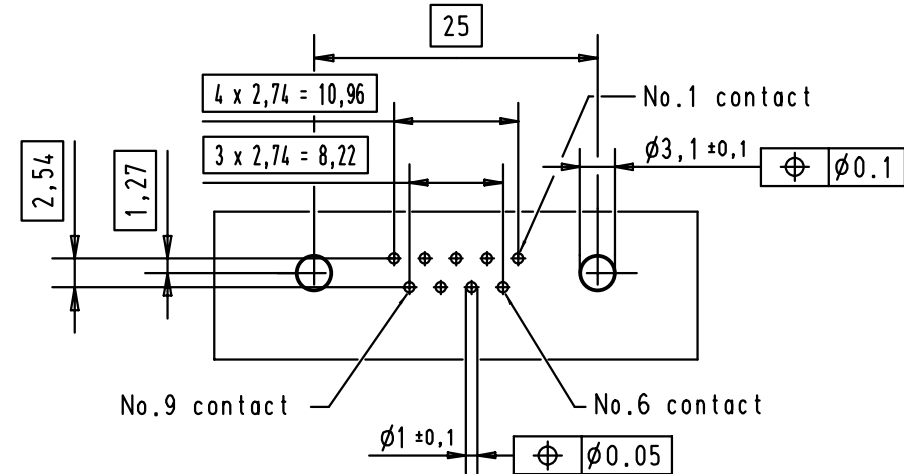

09 66 112 6601	M3	2			
09 66 112 7601	M3	3			
09 66 112 5601	M3	0.76 µm Au			
09 66 112 6602	4-40 UNC	2			
09 66 112 7602	4-40 UNC	3	29773	18-APR-02	CV
09 66 112 5602	4-40 UNC	0.76 µm Au	27960	27/nov/00	ALSPACE
Part number	Nut thread	Performance level	Mod.	Dat.	Name

	Dat.	Name
Detail.	27/nov/00	ALSPACE
Insp.		
Stand.		



D-Sub 09 poles standard angle
female, solder pin with nut and
hole

Maßstab/
Scale

1.5:1

HARTING EURL
F-95972 Paris



TB 0966112x60x

Sub.

Blatt/ Page

2

09 66 112 6601
D-Sub - S PCB connector

Other applications

gender	female connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 112 5602
D-Sub - S PCB connector

Other applications

gender	female connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 112 5601
D-Sub - S PCB connector

Other applications

gender	female connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats
2D files

Typenblatt

Typenblatt

09 66 112 6602
D-Sub - S PCB connector

Other applications

gender	female connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 112 7601
D-Sub - S PCB connector

Other applications

gender	female connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 112 7602
D-Sub - S PCB connector

Other applications

gender	female connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09661125601](#)