



5 4 3 2 1

Mating face according to MIL-C-24308 / DIN 41 652 / CECC 75301-802

No. 1 contact


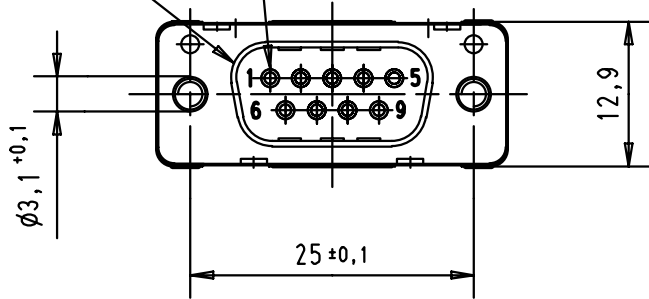



Printed board layout(1,6±0,2 thick)

View component side

(PCB plating = Tin)

No. 1 contact

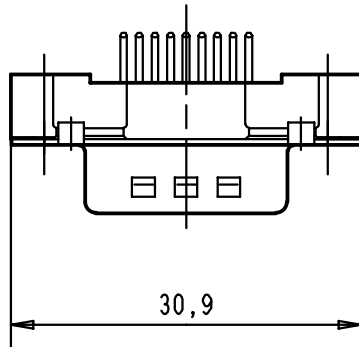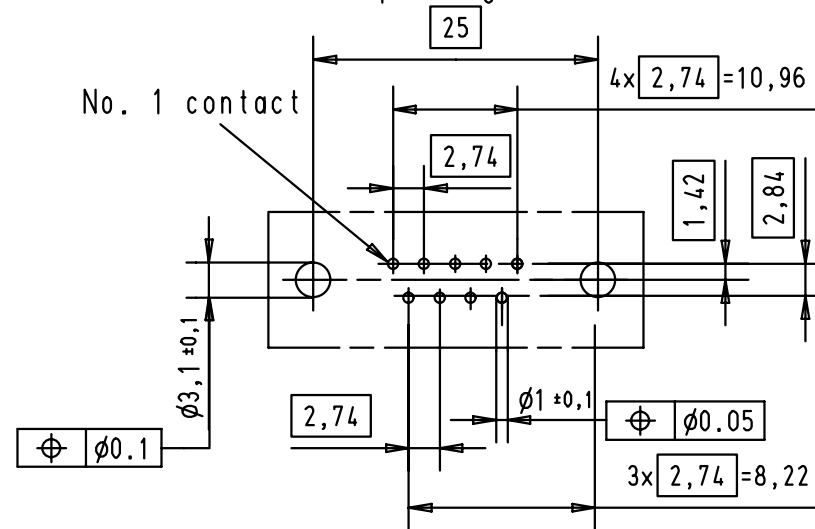

A	09 66 121 6701	M3	2								 All Dim. in mm Orig. Size DIN A 4	D-Sub male straight 9 poles with solder pins and nuts	Maßstab/ Scale 1,5:1
	09 66 121 7701	M3	3										
	09 66 121 5701	M3	0,76 µm Au										
	09 66 121 6702	4-40 UNC	2										
	09 66 121 7702	4-40 UNC	3										
	09 66 121 5702	4-40 UNC	0,76 µm Au	29737	8-NOV-01	JB							
	Part number	nut thread	Performance level	Mod.	Dat.	Name	HARTING EURL F-95972 Paris					TB 09 66 121 X70X Sub.	Blatt/ Page 1

09 66 121 6701
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 121 5702
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 121 5701
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats
2D files

Typenblatt

Typenblatt

09 66 121 6702
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 121 7701
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 121 7702
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09661215702](#)