
PRODUCT DATA DRAWING




MATERIAL:

MATERIAL:	(K				
BODY & COUPLING NUT:	STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1		∅.370[9.40]		
LOCK RING & CONTACTS	BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04		V		
SLEEVE:	BRASS PER ASTM B16, ALLOY UNS No. C36000	, , , , , , , , , , , , , , , , , , ,		_	
BELLOWS SPRING:	ELECTRO DEPOSITED NICKEL: GOLD PLATED			.312 HEX.—_/	
INSULATORS:	PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B				
GASKET:	SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 50/60				
RESISTOR ELEMENT:	ALUMINA SUBSTRATE WITH NICHROME RESISTOR				
FINISH:					
BODY & COUPLING NUT:	PASSIVATED PER AMS-2700			NOTES:	
CONTACTS				1. REPLACE "XX" IN	P
& SLEEVE:	GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.52, OVER NICKEL PER AMS-OO-N-290, CLASS 1, 00005" MIN	MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	
	BODY & COUPLING NUT: LOCK RING & CONTACTS SLEEVE: BELLOWS SPRING: INSULATORS: GASKET: GASKET: RESISTOR ELEMENT: FINISH: BODY & COUPLING NUT: CONTACTS	BODY & COUPLING NUT:STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1LOCK RING & CONTACTSBERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04SLEEVE:BRASS PER ASTM B16, ALLOY UNS No. C36000BELLOWS SPRING:ELECTRO DEPOSITED NICKEL: GOLD PLATEDINSULATORS:PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS BGASKET:SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 50/60RESISTOR ELEMENT:ALUMINA SUBSTRATE WITH NICHROME RESISTORFINISH:PASSIVATED PER AMS-2700CONTACTS & SLEEVE:GOLD PER ASTM B488, TYPE II,	BODY & COUPLING NUT: STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 LOCK RING & CONTACTS BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 SLEEVE: BRASS PER ASTM B16, ALLOY UNS No. C36000 BELLOWS SPRING: ELECTRO DEPOSITED NICKEL: GOLD PLATED INSULATORS: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B GASKET: SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 50/60 RESISTOR ELEMENT: ALUMINA SUBSTRATE WITH NICHROME RESISTOR FINISH: PASSIVATED PER AMS-2700 CONTACTS & SLEEVE: GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.52, OVER NICKEL	BODY & COUPLING NUT: STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1	BODY & COUPLING NUT: STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 LOCK RING & CONTACTS BERYLLIUM COPPER PER ASTM B196, ALLOY UNS C17300, TD04 SLEEVE: BRASS PER ASTM B16, ALLOY UNS No. C36000 BELLOWS SPRING: ELECTRO DEPOSITED NICKEL: GOLD PLATED INSULATORS: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B GASKET: SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 50/60 RESISTOR ELEMENT: ALUMINA SUBSTRATE WITH NICHROME RESISTOR FINISH: PASSIVATED PER AMS-2700 CONTACTS & SLEEVE: GOLD PER ASTM B488, TYPE II, CODP EC, CLASS 152, OVER NICKEL

	CODE C, CLASS 1.52, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.	MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'	UNLESS OTHERV	VISE SPECIFIED	S	MICROWAV	
PERFORMANCE:		FINISH:	SEE NOTES	DECIMAL: X ±.030 X*X' ±15' .XX ±.010 .XXX ±.005	 ALL DIMENSIONS ARE IN INC. ALL DIMENSIONS ARE AFTER BREAK CORNERS & EDGES J. CHAM 1ST & LAST THREADS 	PLATING. 005 R. MAX.		entrepark West Drive, Suite /est Palm Beach, FL 33409	
-		INTERPRET		.XXX ±.005	4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA:S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 TJ.R. 7) REMOVE ALL BURRS		SMA PLUG TO JACK 21 dB		
IMPEDANCE: FREQ. RANGE:	50 OHMS DC TO 18.0 GHz	THE INFORMA	PROPRIETARY TION CONTAINED IN THIS DRAWING ROPERTY OF SV MICROWAVE. INC.	THIRD ANGLE PROJECTION	DRAWN:	GPF 10/02/15			
		ANY REPRODU	JCTION IN PART OR AS A WHOLE		CHECKED:	DAL 10/02/15	B 95077	^{DWG. NO.} SF0930-6	200-XX
		SV MICROWA	/E, INC IS PROHIBITED.		APPROVED:	JM 03/18/96	SCALE: 4:1		SHEET 1 OF 1

REVISION HISTORY					
REV	DESCRIPTION	DATE	APPROVED		
E	DCN 41727	10/15	DAL		

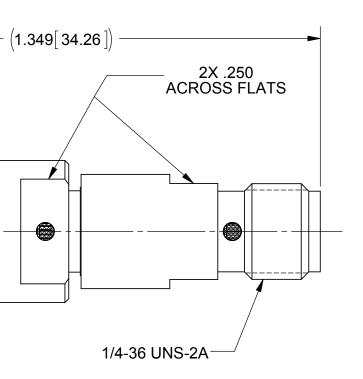

) []

PART NUMBER WITH DESIRED dB VALUE.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

SF0930-6200-00 SF0930-6200-1.5 SF0930-6200-4.5