

ROHS COMPLIANT	
----------------	--

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 49642	02/20	DEF

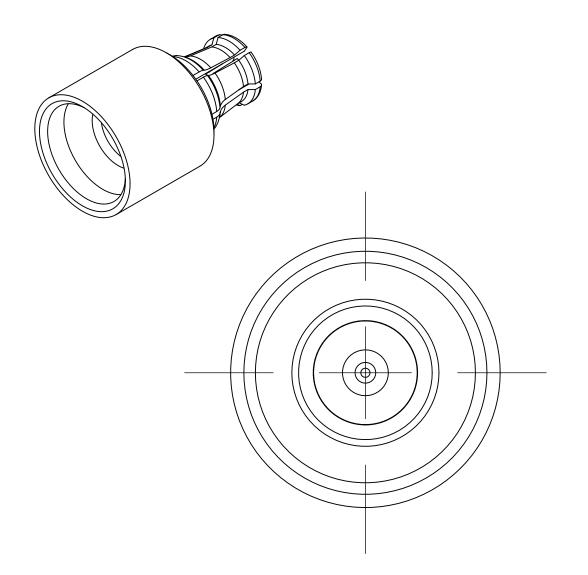

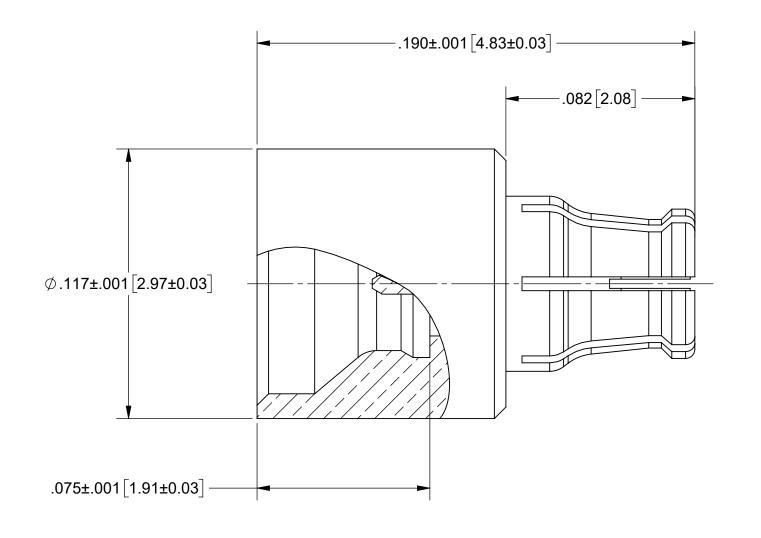

MATERIAL:

BODY & CONTACT:

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATOR:**

FINISH:

BODY & CONTACT:

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: FREQ. RANGE: 50 OHMS DC TO 40 GHz.

MATERIAL:	SEE NOTES
FINISH:	SEE NOTES
SURFACE AREA: N/A PROPRIETARY	

DIMENSIONS ARE IN INCHES TOLERANCES:		
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'		
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005		
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994		
THIRD ANGLE PROJECTION		

DD A W N I	BNK 02/25/2
1) ALL DIMENSIONS ARE IN 2) ALL DIMENSIONS ARE AF 3) BREAK CORNERS & EDG 4) CHAM. 1ST & LAST THRE 5) SURFACE ROUGHNESS (6) DIA: SON COMMON CEN WITHIN 005 T.I.R 7) REMOVE ALL BURRS	FTER PLATING. ES .005 R. MAX. ADS. 63 MIL-STD-10.

UNLESS OTHERWISE SPECIFIED

CTION	DRAWN:	BNK 02/25/20
L	CHECKED:	DEF 02/25/20
	APPROVED:	DEF 02/25/20



TITLE: SMPS FEMALE TO SMPS MALE ADAPTER

SIZE DWG. NO. 1138-4048 SCALE: 24:1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 1138-4048