
PRODUCT DATA DRAWING

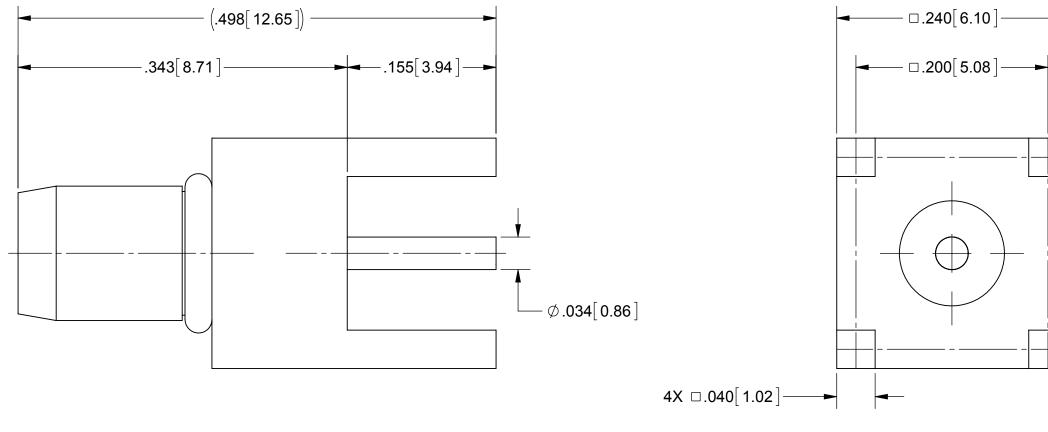

MATERIAL:

- STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1; OR ASTM A582 TYPE 303, COND A BODY:
- BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACT:
- PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATOR:**
- O-RING: FLUOROSILICONE

FINISH:

BODY & CONTACT: GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS NOTES: 1.

FOR RECOMMENDED FOOTPRINT FOR YOUR SPECIFIC PCB, CONTACT SV MICROWAVE SALES DEPARTMENT (sales@svmicro.com, 561-840-1800).

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 157 & LAST THREADS.		2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409			
INISH:	SEE NOTES	X°X' ±15' DECIMAL: .X ±.030 .XX ±.010						
SURFACE AREA: N/A		.XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES	5) SURFACE ROUGHNESS 63. MIL-STD-10. 6) DA: 50 NC COMMON CENTERS TO BE CONCENTRIC WITHIN 005 T.I.R. 7) REMOVE ALL BURRS					
PROPRIETARY		PER ASME Y14.5M - 1994						
	ION CONTAINED IN THIS DRAWING ROPERTY OF SV MICROWAVE, INC. CTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF É, INC IS PROHIBITED.	THIRD ANGLE PROJECTION	DRAWN:	BRT 08/05/02	0.75			
ANY REPRODU			CHECKED:	STW 08/05/02	B 95077 DWG. NO. 14		-6000	
SV MICROWAVE			APPROVED:	STW 08/05/02	SCALE: 10:1		SHEET 1 OF 1	

REVISION HISTORY							
REV	DESCRIPTION	DATE	APPROVED				
A	DCN 42242	06/16	STW				
	•						



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 1485-6000-TD 1485-6000