
PRODUCT DATA DRAWING

REV	DESCRIPTION	DATE	APPROVED
Α	DCN 52732	07/23	
			SEE PDM

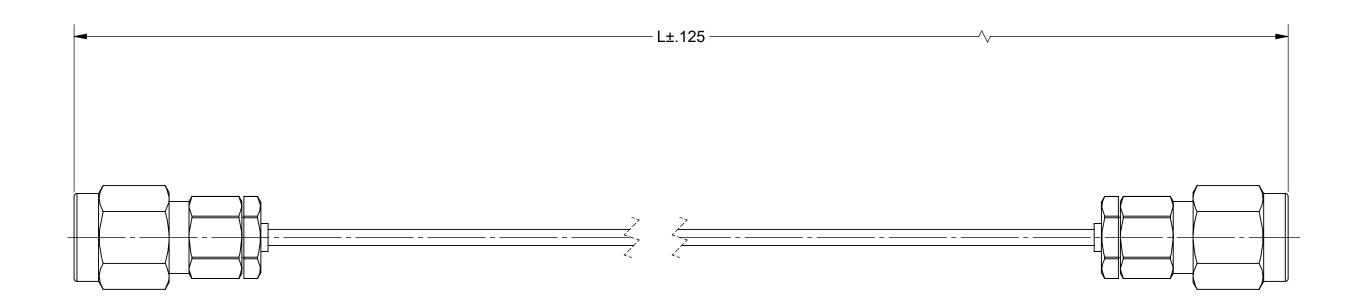

MATERIAL:

2X 2.92MM MALE CONNECTORS: SF1511-60069

FLEXIBLE .047 CABLE: 200-70-479

M23053/5 (BLACK) SINGLE WALL TUBING:

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 40 GHz

VSWR: 1.51:1, DC TO 40 GHz INSERTION LOSS: SEE TABLE

SEE NOTES FINISH: SEE NOTES SURFACE AREA: N/A PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

MATERIAL:

TABLE I					
SV P/N	L (IN)	INSERTION LOSS dB MAX.			
7015-0717	6.00	1.77			
7015-0718	12.00	3.17			

L	JNLESS OTHERWISE SPECIFIED	
3) BRE 4) CH 5) SUF	DIMENSIONS ARE IN INCHES [MILLIMETERS] DIMENSIONS ARE AFTER PLATING. EAK CORNERS & EDGES. 0.05 R. MAX. AM. 15T & LAST THREADS. RFACE ROUGHNESS 63.4MIL-STD-10.	
6) DIA	L'S ON COMMON CENTERS TO BE CONCENTRIC	

DIMENSIONS ARE IN INCHES TOLERANCES:

FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION

DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

7) REMOVE ALL BURRS DRAWN: MAL 06/16/16

CHECKED:

APPROVED:

2.92MM MALE TO 2.92MM MALE FLEXIBLE .047 CABLE **ASSEMBLY**

MICROWAVE

SIZE DWG. NO. 7015-0717-0718 В SHEET 1 OF 1

SEE PDM SEE PDM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

7015-0717