
PRODUCT DATA DRAWING

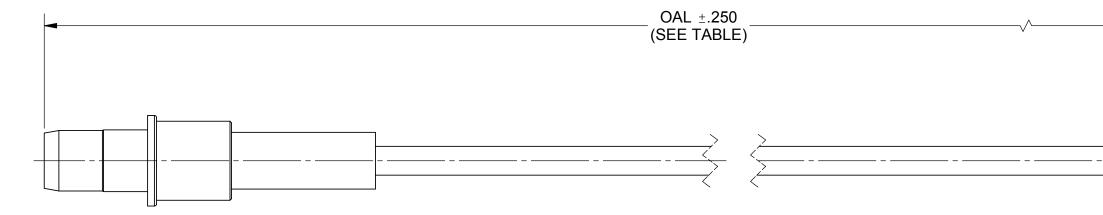

MATERIAL:

CONNECTORS: BMA (SIZE 8) D38999 PIN CONTACT (SF9421-6000)

SMA PLUG (SF2906-6002)

CABLE: T-FLEX 405

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE:50 OHMSFREQ. RANGE:DC TO 18.0 GHz

| MATERIAL: | SEE NOTES | DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: +1/64 ANGULAR: X° +1°0' | UNLESS OTHE |
|--|----------------------|---|--|
| FINISH: | SEE NOTES | X°X' ±15' DECIMAL: .X ±.030 .XX ±.010 | 1) ALL DIMENSIONS ARE IN 2) ALL DIMENSIONS ARE A 3) BREAK CORNERS & EDO 4) CHAM. 1ST & LAST THR |
| SURFACE AREA: N/A | | .XXX ±.005 | 5) SURFACE ROUGHNESS 6) DIA.'S ON COMMON CEN WITHIN .005 T.I.R. |
| PROPRIETARY | | PER ASME Y14.5M - 1994 | 7) REMOVE ALL BURRS |
| THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF | | THIRD ANGLE PROJECTION | DRAWN: |
| | | | CHECKED: |
| | , INC IS PROHIBITED. | | APPROVED: |

| | DEV | | SION HIST | ORY DATE | | | | |
|--|--|---------------|-----------|---------------|-----------------|--|--|--|
| | REV | DESCRIPTIO | IN | 11/19 | APPROVED DEF | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | I | | | | |
| | | | • | - | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | / | _ | | | | | |
| | | f | | וֹך | | | | |
| | | | | | | | | |
| | ¯ - ↓ ↓ | | | | | | | |
| _ | | N | | | | | | |
| | | V | | IJ | | | | |
| | | | | _ | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| SV P/N | | ^ | | | | | | |
| | | | OAL | | | | | |
| 7093-0180 | | | 12.000 | | | | | |
| | F | 7093-0181 | | 24.0 | 00 | | | |
| | | 1000-0101 | | Z4.0 | | | | |
| HERWISE SPI | | D 🧲 | | MICROWA | VE | | | |
| E IN INCHES [MILLIME E AFTER PLATING. EDGES .005 R. MAX. | ETERS] | | www.sv | microwave.com | | | | |
| HREADS. SS 63√ MIL-STD-10. | | | | | | | | |
| CENTERS TO BE CON | 563 MIL-STD-10. INTERS TO BE CONCENTRIC TITLE: BMA (SIZE 8) D38999 PIN CONTACT TO SMA MALE FOR | | | | | | | |
| S.I 1 | SJ 11/11/19 Ø.085 T-FLEX CABLE ASSEMBLY | | | | | | | |
| DEF 11/11/19 | | SIZE DWG. NO. | | 7093-01 | 80-0181 | | | |
| | 11/11/ | | | 1000-01 | SHEET 1 OF 1 | | | |
| | 11/11/ | JUNE JUNE | | | SHLET TUP I | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 7093-0180 7093-0181