## NOTES:

I. MATERIALS AND FINISHES:

BODY - BRASS, WHITE BRONZE PLATING CONTACT-OUTER - PHOSPHOR BRONZE, SILVER PLATING CONTACT - BeCu, SILVER PLATING INSULATOR - PTFE, NATURAL O-RING - SILICONE RUBBER, RED

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM

B. FREQUENCY RANGE: DC - 6 GHz C. VSWR: I.08 MAX.@ DC -3 GHz

D. INSERTION LOSS: 0.05XSQRT[F(GHz)]dB MAX.

E. VOLTAGE RATING: 500 VRMS

F. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS MIN.

G. INSULATION RESISTANCE: 5000 M $\Omega$  MIN.

H. INTERMODULATION 3RD ORDER: -166 dBc MAX. (2 X 43 dBm)

3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.


B. TEMPERATURE RANGE: -65° C TO +165° C

C. COMPATIBLE WITH ALL STANDARD 4.3/10 PLUGS


4. PACKAGING:


A. QUANTITY: PACK IOPCS/TRAY B. MARKING: BAG TO BE MARKED

"AMPHENOL RF, 431-127J-52S, AND DATE CODE"





| REVISIONS |                 |           |       |      |
|-----------|-----------------|-----------|-------|------|
| REV       | DESCRIPTION     | DATE      | ECO   | APPR |
| Α         | RELEASE TO MFG. | 18-Aug-16 | 01321 | KCE  |





SCALE 1.000

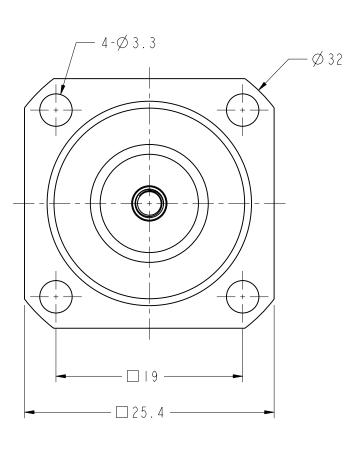

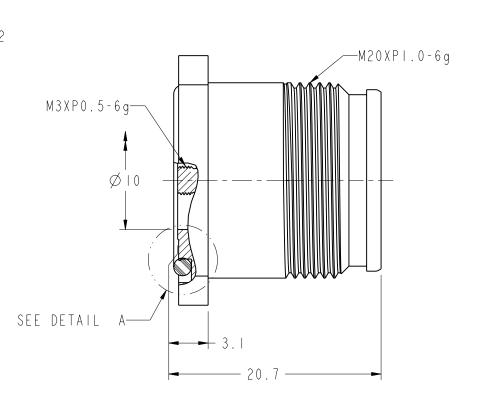

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:              |   |
|---|---|
| <pre>     &lt;0.5mm      0.5 - 6mm      6 - 30mm      30 - 120mm      ANGLES</pre>    | ı |
| $\pm$ 0.05mm $\pm$ 0.1mm $\pm$ 0.2mm $\pm$ 0.3mm $\pm$ 1                              |   |
| NOTICE - These drawings, specifications, or other data (I) are, and remain the        | 1 |
| property of Amphenol corp.' (2) must be returned upon requiest; and (3) are           |   |
| confidential and not to be disclosed to any person other than those to whom they      |   |
| are given by Amphenol Corp. the funishing of these drawings, specifications, or       | r |
| other data by Amphenol Corp., or to any other person to anyone for any purpose is     |   |
| not to be regarded by implicatioin or otherwise in any manner licensing, granting     |   |
| rights to permitting such holder or any other sperson to manufacture, use or sell any |   |
| product, process or design, patented or otherwsie, that may in any way be related to  | ı |
| or disclosed by said drawings, specifications, or other data.                         | H |

THE FOR ATTERWISE AREALES. DIMENSIONS ARE IN METRIC AND TOLERANCES ARE

| MATERIAL   | DRAWN<br>STAR     | D A T E<br>  8 - A u g -   6 | TITLE              |
|------------|-------------------|------------------------------|--------------------|
|            | ENGINEER<br>SUNDE | DATE<br>18-Aug-16            | — 4.3 <sup>-</sup> |
| REFERENCE  | APPROVED          | DATE                         |                    |
| EAR # 6645 | S.HSIEH           | 18 - Aug - 16                | SCALE: 2.6         |
|            | CAD FILE          |                              | DW                 |
| FINISH     |                   |                              |                    |

| 4.3-10         | PANEL | JACK   |
|----------------|-------|--------|
|                |       |        |
| SCALE: 2.6:1.0 | SHEET | 2 OF 2 |

DWG SIZE

|        | DRAWING NO. | 4310 |
|--------|-------------|------|
| 2 OF 2 |             |      |
| Z OF Z | LITEM NO.   | 8865 |
| REV    | TILM NO.    | 0000 |
| Λ.     | PART NO.    | 431- |
| I A    | prant no.   | 401  |

| Amphenol        | RF  |
|-----------------|-----|
| www.amphenolrf. | com |

| DRAWING NO. | 43 0655 A8-002-ATS-50 |
|-------------|-----------------------|
| ITEM NO.    | 886551AANA1AB5F       |
| PART NO.    | 43I-I27J-52S          |

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 431-127J-52S