



1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT - BeCu, GOLD PLATING
INSULATOR - PTFE, NATURAL
COUPLING NUT - BRASS, NICKEL PLATING
RETAINING RING - STAINLESS STEEL, NATURAL
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC-12 GHz
C. VSWR(RETURN LOSS): -25 dB MAX. @ DC-6 GHz
-20 dB MAX. @ 6-12 GHz
D. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO 165° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: PACKAGING TO BE MARKED
"AMPHENOL RF, AD-NPMCXJ-2 & DATE CODE"

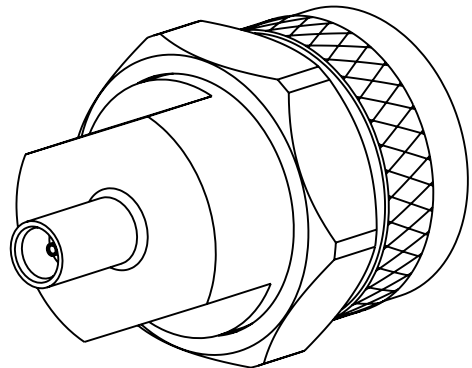

SCALE 2.000

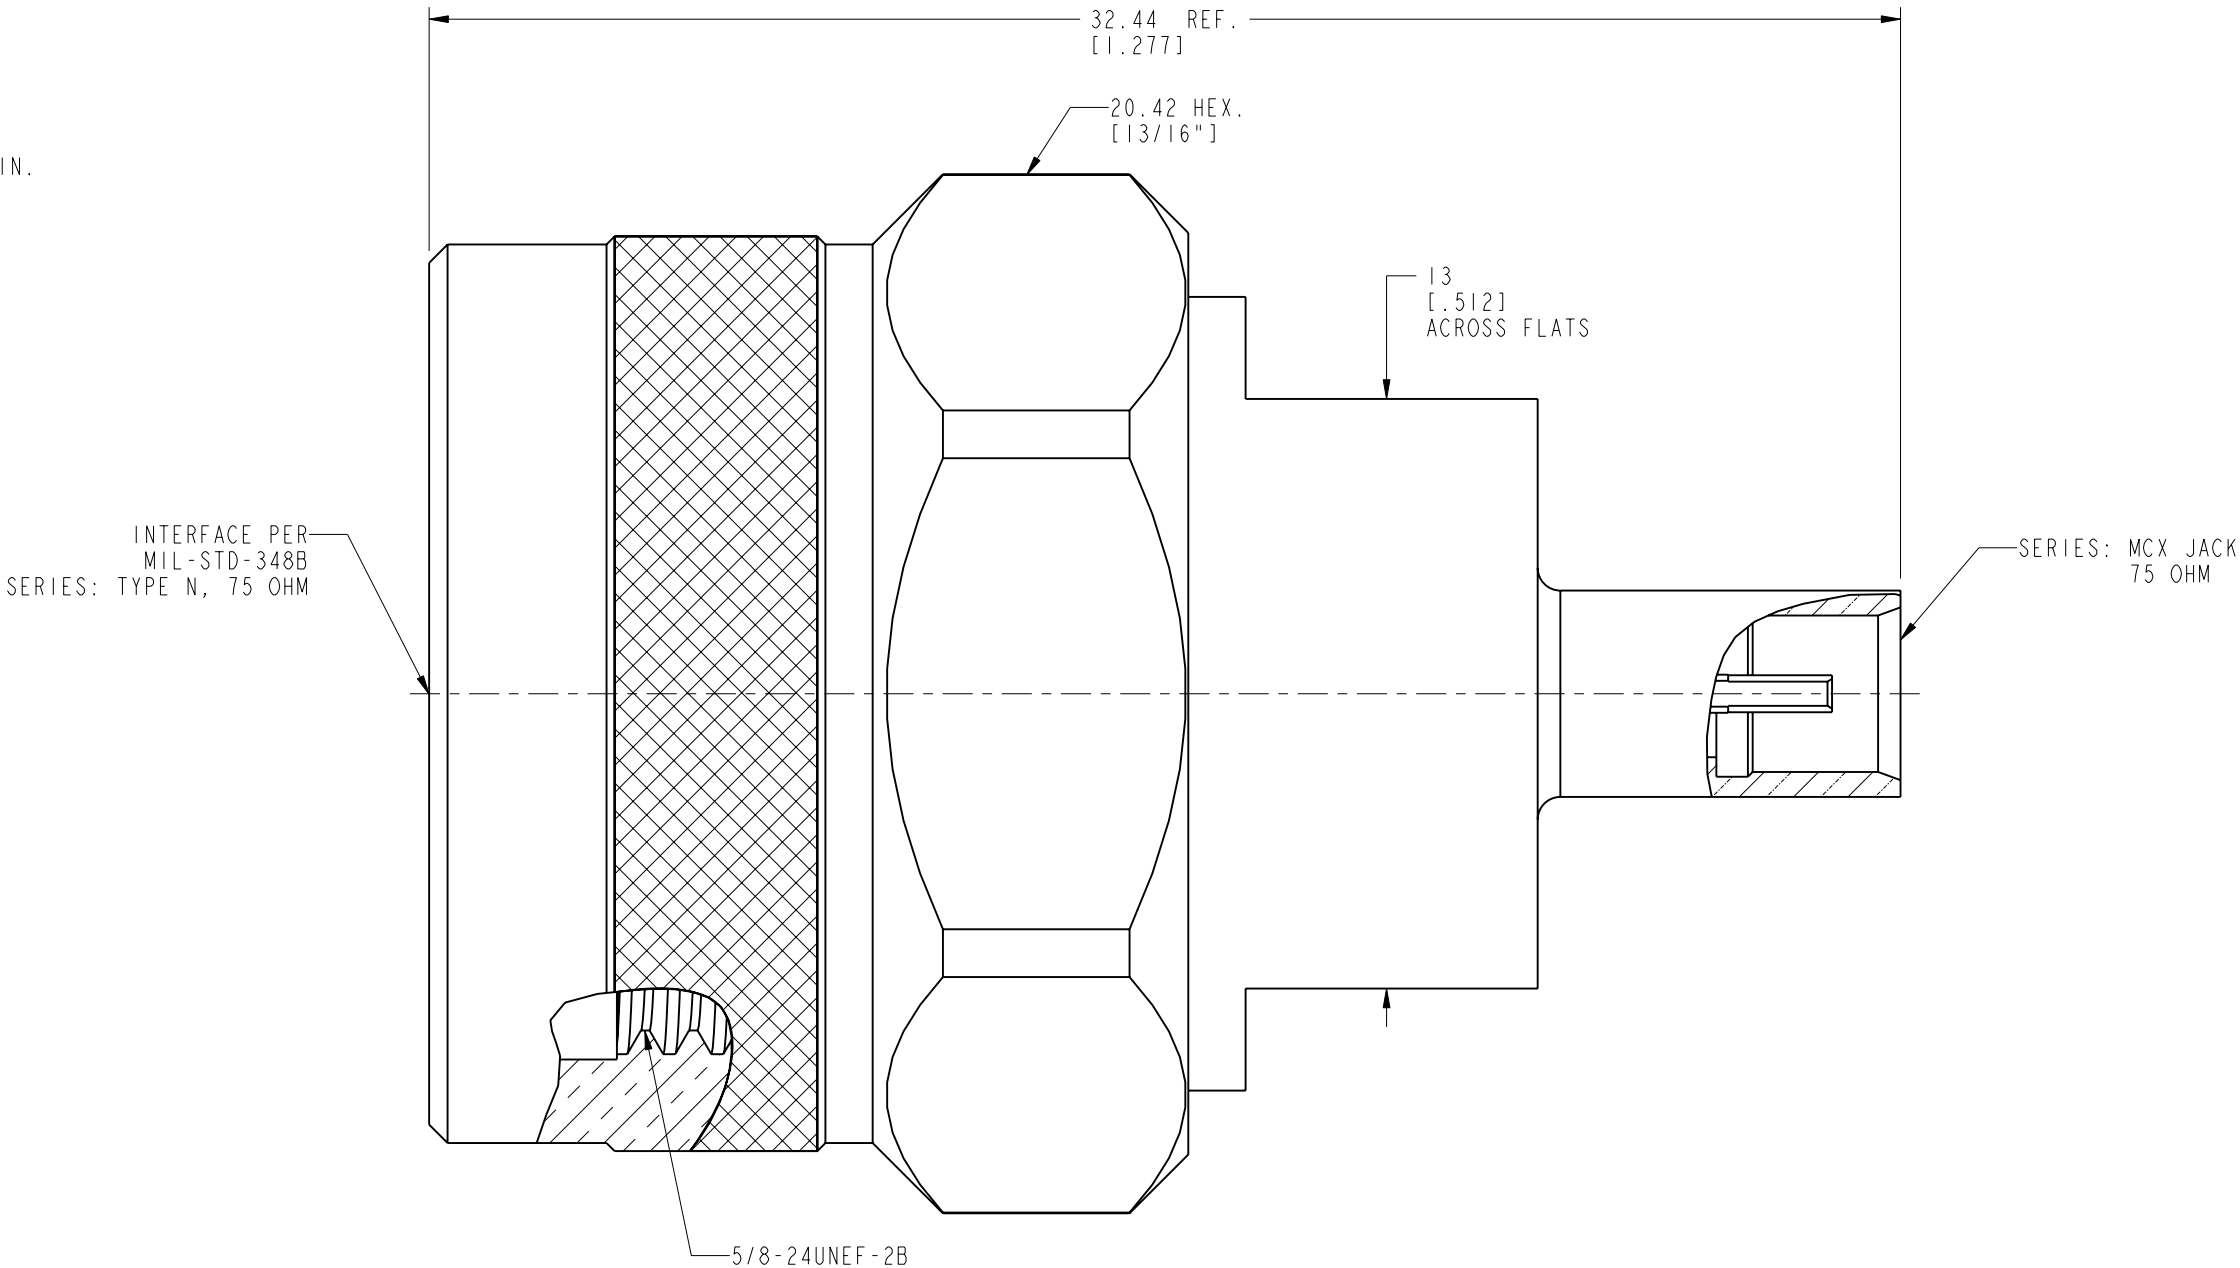

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°	MATERIAL	DRAWN	DATE	TITLE ADAPTER N PLUG TO MCX JACK 75 OHM		Amphenol RF www.amphenolrf.com	
	SEE NOTES	M. ZHANG	13-Aug-19				
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE	C. VIGORITO	DATE	SCALE: 6.0:1.0		DRAWING NO. AD-NPMCXJ-2	
	EAR# 8729		03-Apr-19				
	REF: ---	APPROVED	DATE	SHEET 2 OF 2		ITEM NO. AD-NPMCXJ-2	
	CONFIGURATION LEVEL: In Work	S.HSIEH	16-Aug-19				
	FINISH	CAD FILE		DWG SIZE B	REV A	PART NO. AD-NPMCXJ-2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[AD-NPMCXJ-2](#)