

REFERENCE DIMENSIONS - ASSEMBLED

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC; COLOR: GREY WEDGELOCK: THERMOPLASTIC; COLOR: GREEN SEALS: SILICONE RUBBER CONTACTS: COPPER ALLOY; NICKEL PLATED

2. SPECIFICATIONS:

- 2.1 CURRENT RATING: 13 AMPS
- 2.2 OPERATING TEMPERATURE: -55°C TO +125°C
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
- 2.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 2.5 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP @ 13 AMP TEST CURRENT.
- 2.6 MOISTURE RESISTANCE: IP67 (MATED CONDITION) 2.7 CONNECTOR MATING CYCLE DURABILITY: 100 CYCLES


- 3. MATING PART: AT04-3P* RECEPTACLE (* = MODIFICATIONS AND COLORS)
- 4. AVAILABLE HAND CRIMPER: CA-5D12
- 5. ALL COMPONENTS ARE RoHS COMPLIANT.
- 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

2

- 7 WIRE RANGE OF CONTACTS INCLUDED IN KIT: 16 - 20 AWG
- 8 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL.	MAX. INSUL.	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	2.24 mm (.088 in)	3.68 mm (.145 in)	14 - 20 AWG

~			
7 3	AT62-201-16141		
1	AW3S		
1	AT06-3S		
QUANTITY	PART N	IUMBER	
		Μ	
UNLESS OTHER	UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64		
2) Tolerances are			
2 PL DEC ±0.30 3 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:	
3) Note reference	3) Note reference = X MATERIAL SPECIFICATIONS: PROCESS SPECIFICATIONS:		
NEXT ASS'Y:	NEXT ASS'Y:		

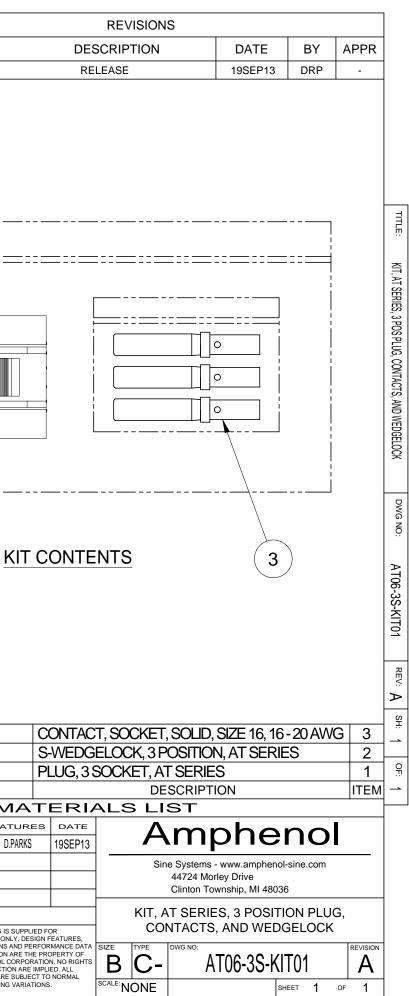

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: AT06-3S-KIT01